


Power Outlet Pedestals

125 Amps | Unmetered | 120/240 VAC



U5200-XL-75

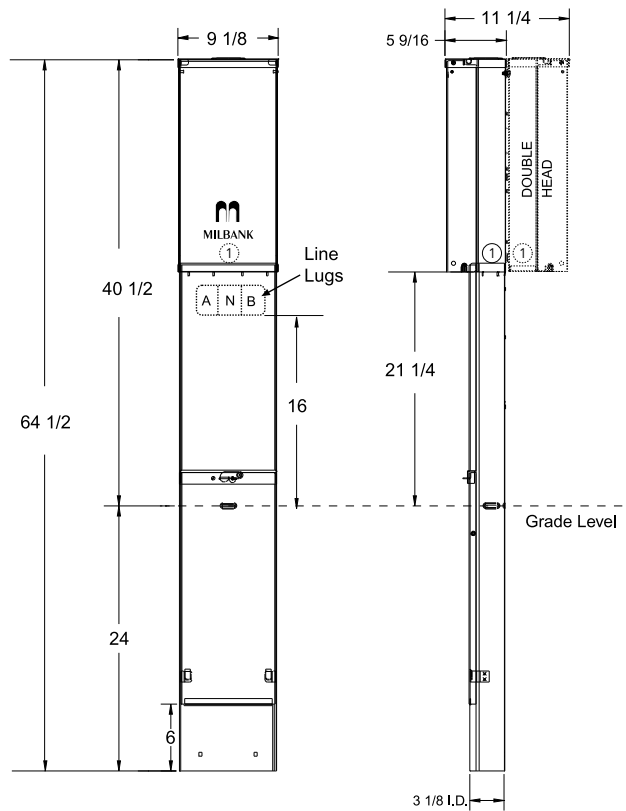

Specifications

- UL listed 125 Amps, 120/240 Volt—1Ø power outlet.
- Short circuit current withstand rating 10,000 RMS symmetrical amperes.
- Type 3R welded enclosure for durable outdoor use.
- Enclosure constructed with galvanized 16 gauge steel.
- Direct burial or pad mounted post constructed with 16 gauge galvanized steel. Two removable front covers for ease of installation. Accepts up to (3) 2 1/2" conduits.
- ANSI 61 grey polyester powder coat finish.
- Convenient concentric knock-out configurations.
- Hub opening with closure plate allows for meter retrofit.
- Wire terminations accept copper or aluminum conductors for loop feed wiring.
- Line: (2) #6-350 kcmil per phase, ground: (2) #14-2/0, neutral: (2) #6-350 kcmil
- Six circuit plated copper interior accepts standard plug-in type circuit breakers. Rated up to 125 Amps.
- Three position self-grounded receptacle bridge accepts most standard NEMA receptacles with mounting plates.
- Components factory wired with stranded copper wire.
- Lockable hinge cover and dead front are removable for installation and maintenance. Stay-open hinge cover has safety interlock on dead front. Deadfront must be removed before hinge cover can be removed.
- LED or fluorescent site light kits available. Factory or field installable. See accessories page.
- Unit weight - single: 48 lbs., double: 70 lbs.



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

Power Outlet Pedestals

125 Amps | Unmetered | 120/240 VAC

125 Amps | Unmetered Power Outlet Pedestals

Catalog Number	Mounting Type	Powerheads	Receptacle Configuration	Circuit Breaker Configuration	Loop Feed	Connectors (Line)	Dimensions			Knockouts
							D"	W"	H"	
U5200-XL	Direct Burial	Single	—	—	Yes	#6-350	5 ⁷ / ₁₆	8 ¹¹ / ₁₆	64 ¹ / ₂	1 ¹ / ₄
U5200-XL-332	Direct Burial	Single	A	W	Yes	#6-350	5 ⁷ / ₁₆	8 ¹¹ / ₁₆	64 ¹ / ₂	1 ¹ / ₄
U5200-XL-41	Direct Burial	Single	B	X	Yes	#6-350	5 ⁷ / ₁₆	8 ¹¹ / ₁₆	64 ¹ / ₂	1 ¹ / ₄
U5200-XL-55	Direct Burial	Single	C	Y	Yes	#6-350	5 ⁷ / ₁₆	8 ¹¹ / ₁₆	64 ¹ / ₂	1 ¹ / ₄
U5200-XL-75	Direct Burial	Single	D	Z	Yes	#6-350	5 ⁷ / ₁₆	8 ¹¹ / ₁₆	64 ¹ / ₂	1 ¹ / ₄
U5210-XL	Pad Mount	Single	—	—	Yes	#6-350	5 ⁷ / ₁₆	8 ¹¹ / ₁₆	40 ¹ / ₂	1 ¹ / ₄
U5220-XL	Direct Burial	Double	—	—	Yes	#6-350	11 ¹ / ₄	8 ¹¹ / ₁₆	64 ¹ / ₂	1 ¹ / ₄
U5220-XL-41	Direct Burial	Double	B	X	Yes	#6-350	11 ¹ / ₄	8 ¹¹ / ₁₆	64 ¹ / ₂	1 ¹ / ₄
U5220-XL-75	Direct Burial	Double	D	Z	Yes	#6-350	11 ¹ / ₄	8 ¹¹ / ₁₆	64 ¹ / ₂	1 ¹ / ₄
U5230-XL	Pad Mount	Double	—	—	Yes	#6-350	11 ¹ / ₄	8 ¹¹ / ₁₆	40 ¹ / ₂	1 ¹ / ₄

Receptacle Configurations

A	B	C	D
(2) TT30R, (1) 5-20R GFI	(1) TT30R, (1) 5-20R GFI	(1) 14-50R, (1) 5-20R GFI	(1) 14-50R, (1) TT30R, (1) 5-20R GFI

Circuit Breaker Configurations

W	X	Y	Z
(2) 30A, 1P, 120V (1) 20A, 1P, 120V	(1) 30A, 1P, 120V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 30A, 1P, 120V (1) 20A, 1P, 120V

Notes

- 20 Amps GFI receptacles are weather resistant and tamper resistant.
- 20 Amps GFI required at each RV site by UL and NEC 551-71.
- LED or fluorescent site light kits available. Factory or field installable. See accessories page.
- Contact factory for additional configurations not shown here.

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

