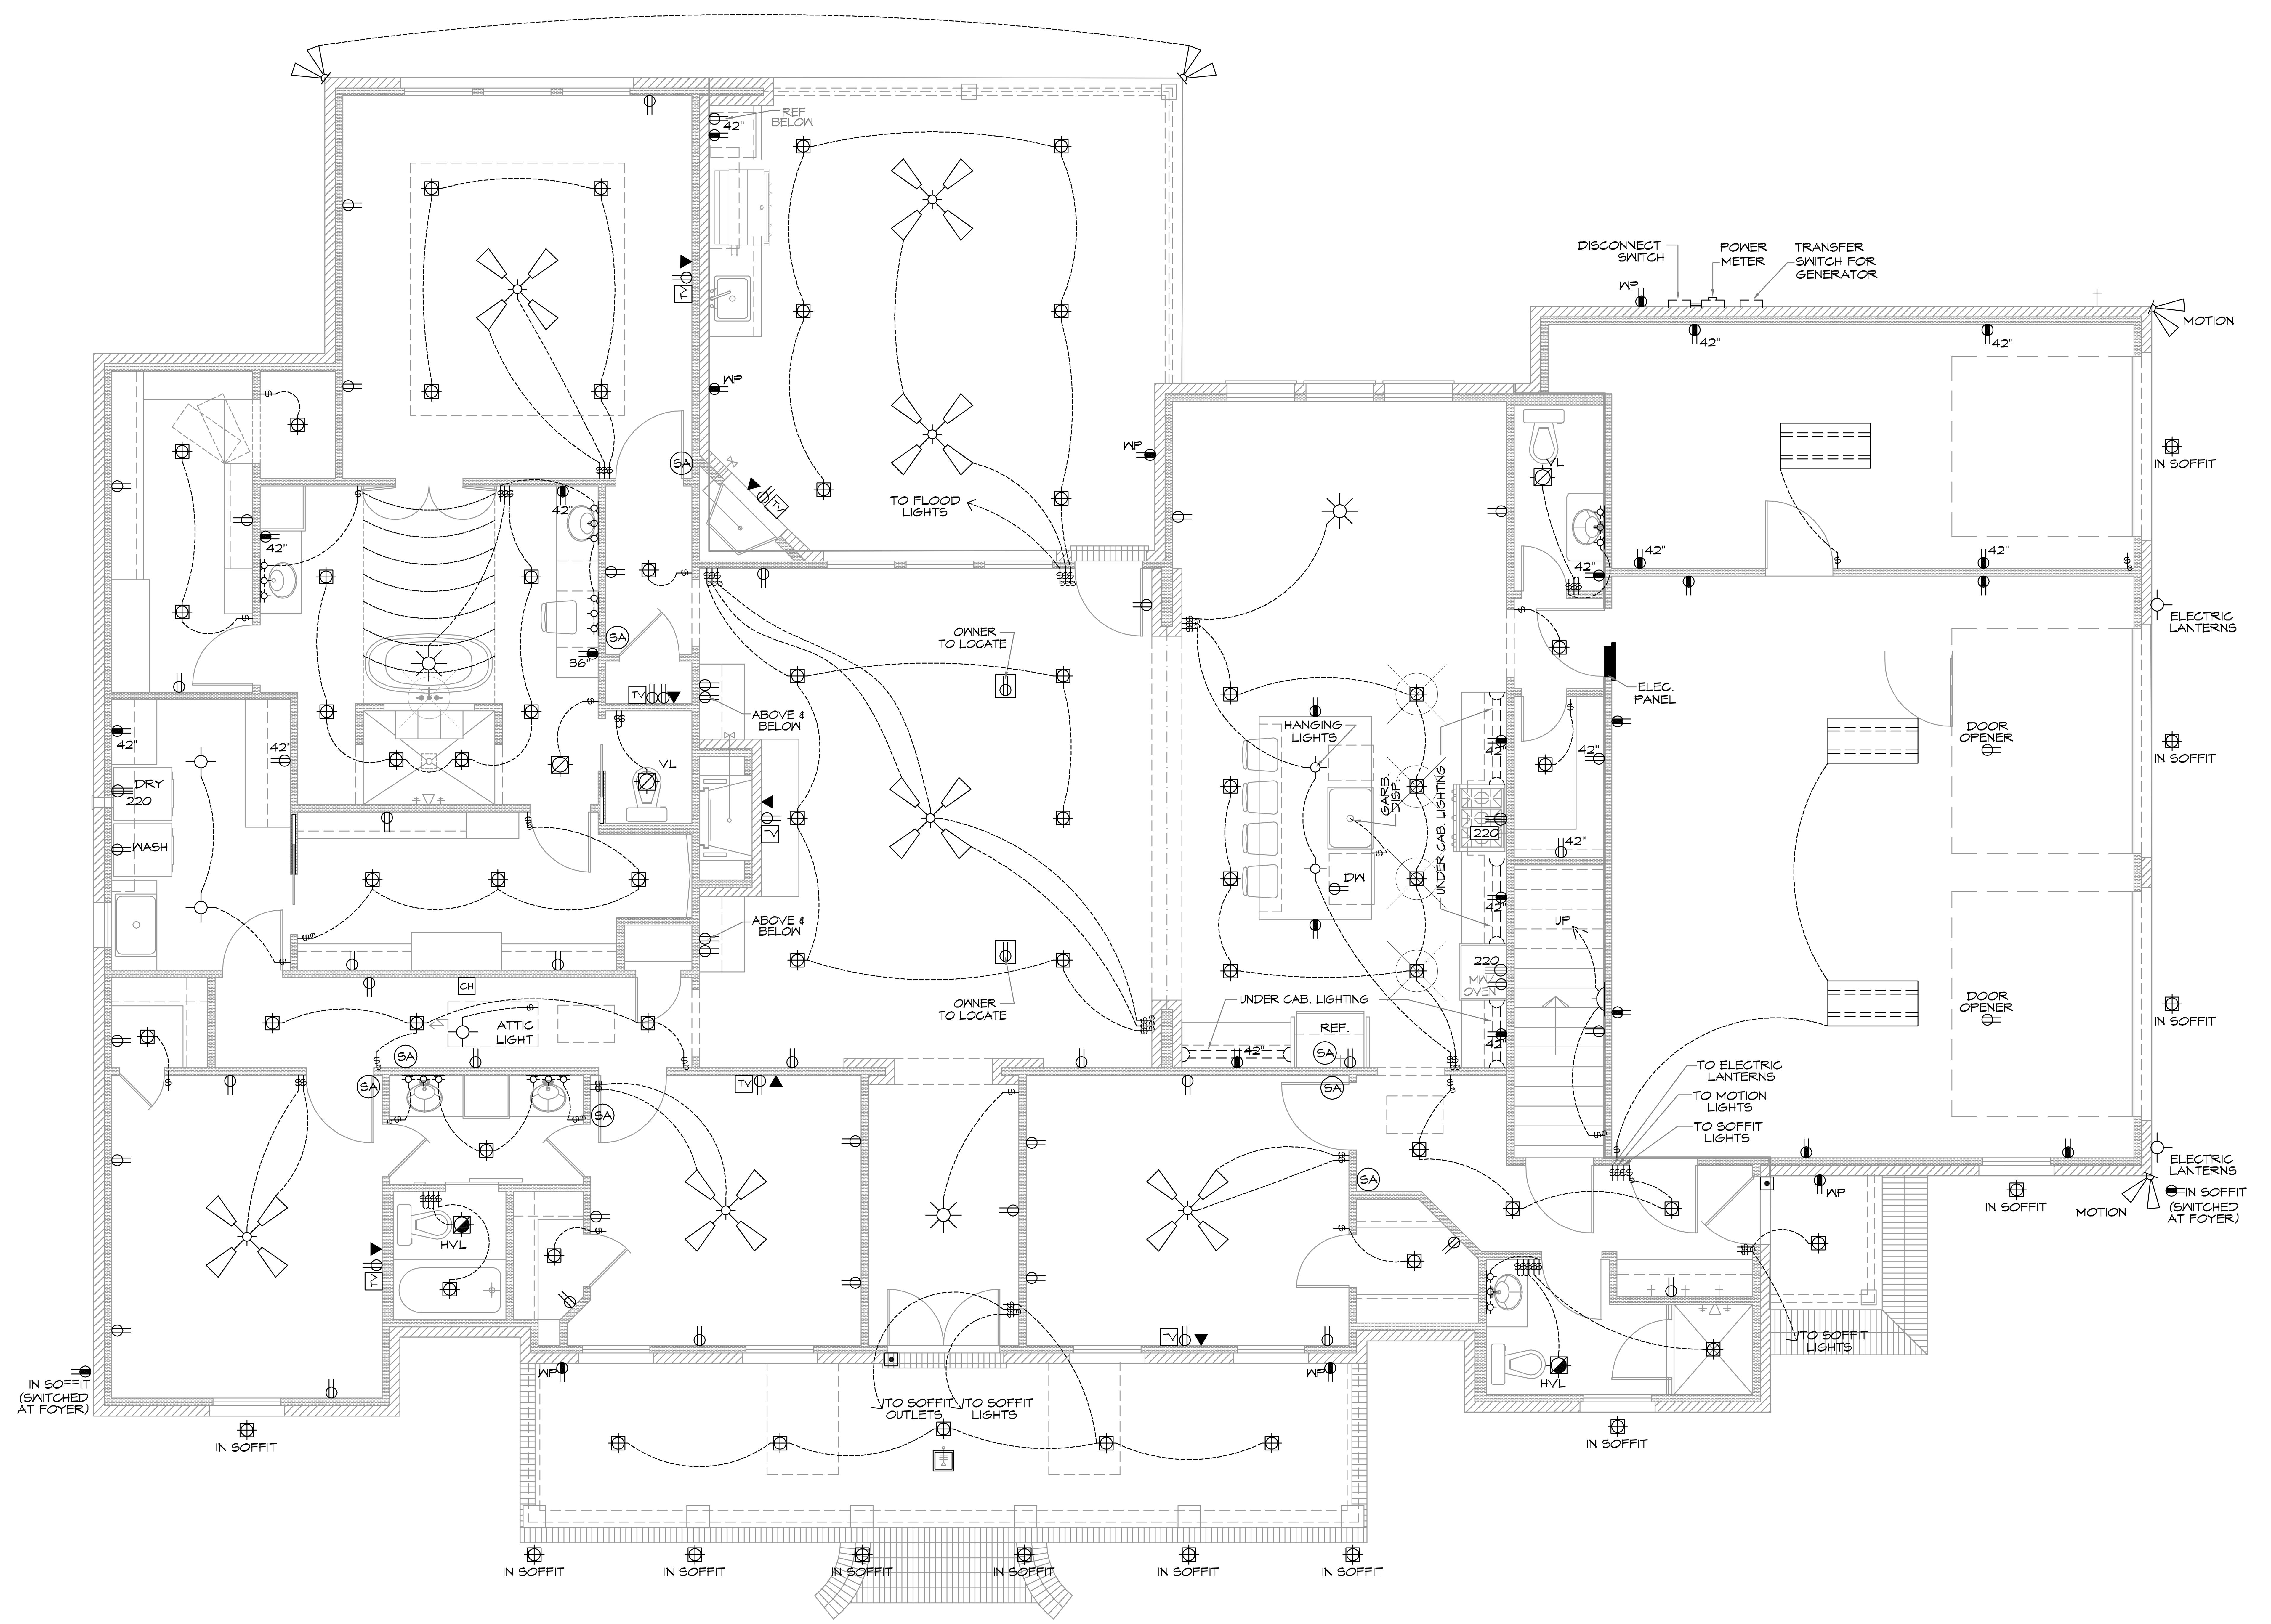

13 ELECTRICAL SCHEMATIC
SCALE: 1/4"=1'-0"

ELECTRICAL SYMBOL LEGEND

TV	CABLE OUTLET
▼	TELEPHONE/ ETHERNET OUTLET
	RECEPTACLE, 15A, 125V, 2 POLE 3 WIRE, GROUNDED, DUPLEX
	FLOOR DUPLEX RECEPTACLE GROUND-FAULT-CIRCUIT-INTERLIFT RECEPTACLE-USE SQUARE D
	QUICK GUARD FOR WP LOCATIONS
220	RECEPTACLE, 50A, 220V, 2 POLE 3 WIRE, GROUNDED
	TOGGLE SWITCH, SINGLE POLE, 15A
	TOOGLE SWITCH, 3 WAY, 15A
	ELEC. DOOR BELL
CH	DOORBELL CHIME
D	DIMMER SWITCH
	LIGHT FIXTURE, INCANDESCENT CEILING MOUNTED
	LIGHT FIXTURE, INCANCESCENT EXTERIOR FLOODS
	CEILING FAN W/ LIGHT- PROVIDE SEPERATE SWITCHES FOR F & L
	LIGHT FIXTURE - CHANDELIER W/ INCANDESCENT BULBS
	LED RECESSED LIGHT
	LIGHT FIXTURE - FLOURESCENT
SA	SMOKE ALARM - 110V ELEC. W/ CARBON MONOXIDE DETECTOR
	VANITY LIGHT
HVL	HEAT/VENT/LIGHT
VL	VENT/LIGHT ONLY
	SCONCE LIGHT
	ELECTRIC LANTERN

PRE-WIRE FOR THE FOLLOWING:

- TELEPHONE *ONE INCOMING LINE*
- CABLE VISION *ONE OUTLET PER ROOM MINIMUM*
- SECURITY SYSTEM - COORDINATE W/ OWNER
- COORDINATE ELECTRICAL SYSTEM WITH MECHANICAL CONTRACTOR
- ALL WIRING TO BE COPPER MIN. 12/2 W/ GROUND
- VERIFY LOCATION OF FLOOR OUTLETS IN FAMILY ROOM
- PROVIDE 110V OUTLET FOR GARAGE DISPOSAL UNDER KITCHEN SINK
- PROVIDE 110V OUTLET FOR WHIRLPOOL TUB MOTOR UNDER WHIRLPOOL TUB IN MASTER BATH
- PROVIDE 220V OUTLET FOR CLOTHES DRYER
- COORDINATE SURROUND SYSTEM W/ OWNER

ELECTRICAL NOTES:

- MAIN FEED INTO HOUSE TO BE TRENCHED UNDERGROUND FROM SUPPLY POLE TO METER THEN MAIN DISCONNECT OUTSIDE.
- ALL SMOKE DETECTORS TO BE ELECTRIC POWERED WITH BATTERY BACKUP AND WIRED TO SET ALL ALARMS OFF IF ONE IS TRIPPED.
- ALL EXTERIOR, KITCHEN, AND BATH OUTLETS TO BE GROUND FAULT CIRCUIT INTERRUPT EQUIPPED AND ON A SEPARATE CIRCUIT.
- ELECTRICAL DISCONNECTS ARE TO BE AT A/C UNIT, CONDENSING UNIT, AND WATER HEATER.
- HEAT VENT LIGHTS ARE TO BE ON A SEPARATE CIRCUIT.
- OUTLETS, INCLUDING PHONE AND CABLE, MAY BE ADDED OR CHANGED UPON OWNERS REQUEST.
- ELECTRICAL CONTRACTOR TO VERIFY EQUIPMENT TYPE AND SIZE.
- INSTALL LIGHTS IN ATTIC SPACE W/ SWITCH AT FOOT OF DISP. STAIRS
- ELECTRICAL SERVICE TO BE A 42 CIRCUIT 200 AMP MAIN LOCATED IN THE GARAGE.
- A SUB-PANEL MAY NEED TO BE ADDED FOR ENOUGH CIRCUITS.
- HOUSE TO BE WIRED FOR A SECURITY SYSTEM.
- ALL KITCHEN OUTLETS ARE TO BE GFI EXCEPT APPLIANCE OUTLETS NOT EASILY ACCESSIBLE.
- ARC FAULT BREAKERS ARE TO BE USED IN ALL BEDROOMS.
- IF GAS FIRED APPLIANCES ARE USED IN HOME, CARBON MONOXIDE ALARMS ARE NEEDED (IRC R315).

DAMMON ENGINEERING, INC.
LOUISIANA & MISSISSIPPI
Chief Engineer: Brian Mistich, PE
554 Old Spanish Trail
Slidell, LA 70458
www.dammonengineering.com
info@dammonengineering.com
PH: 985.649.5832

REVISIONS

#	DESCRIPTION	DATE

SEAL:

R:\Stamps\Brian La Stamp Professional.jpg

NEW RESIDENTIAL PROJECT
ALAN NOVAK
292 HIGHLAND BLUFF DR
SLIDELL, LA 70461

JOB No:	2019	DATE:	05-15-2019
DRAWN BY:	JAGMW	CHECKED BY:	CKD

SHEET TITLE:
ELECTRICAL SHEMATIC

DRAWING NUMBER:
E101

SHEET No: 10 of 10