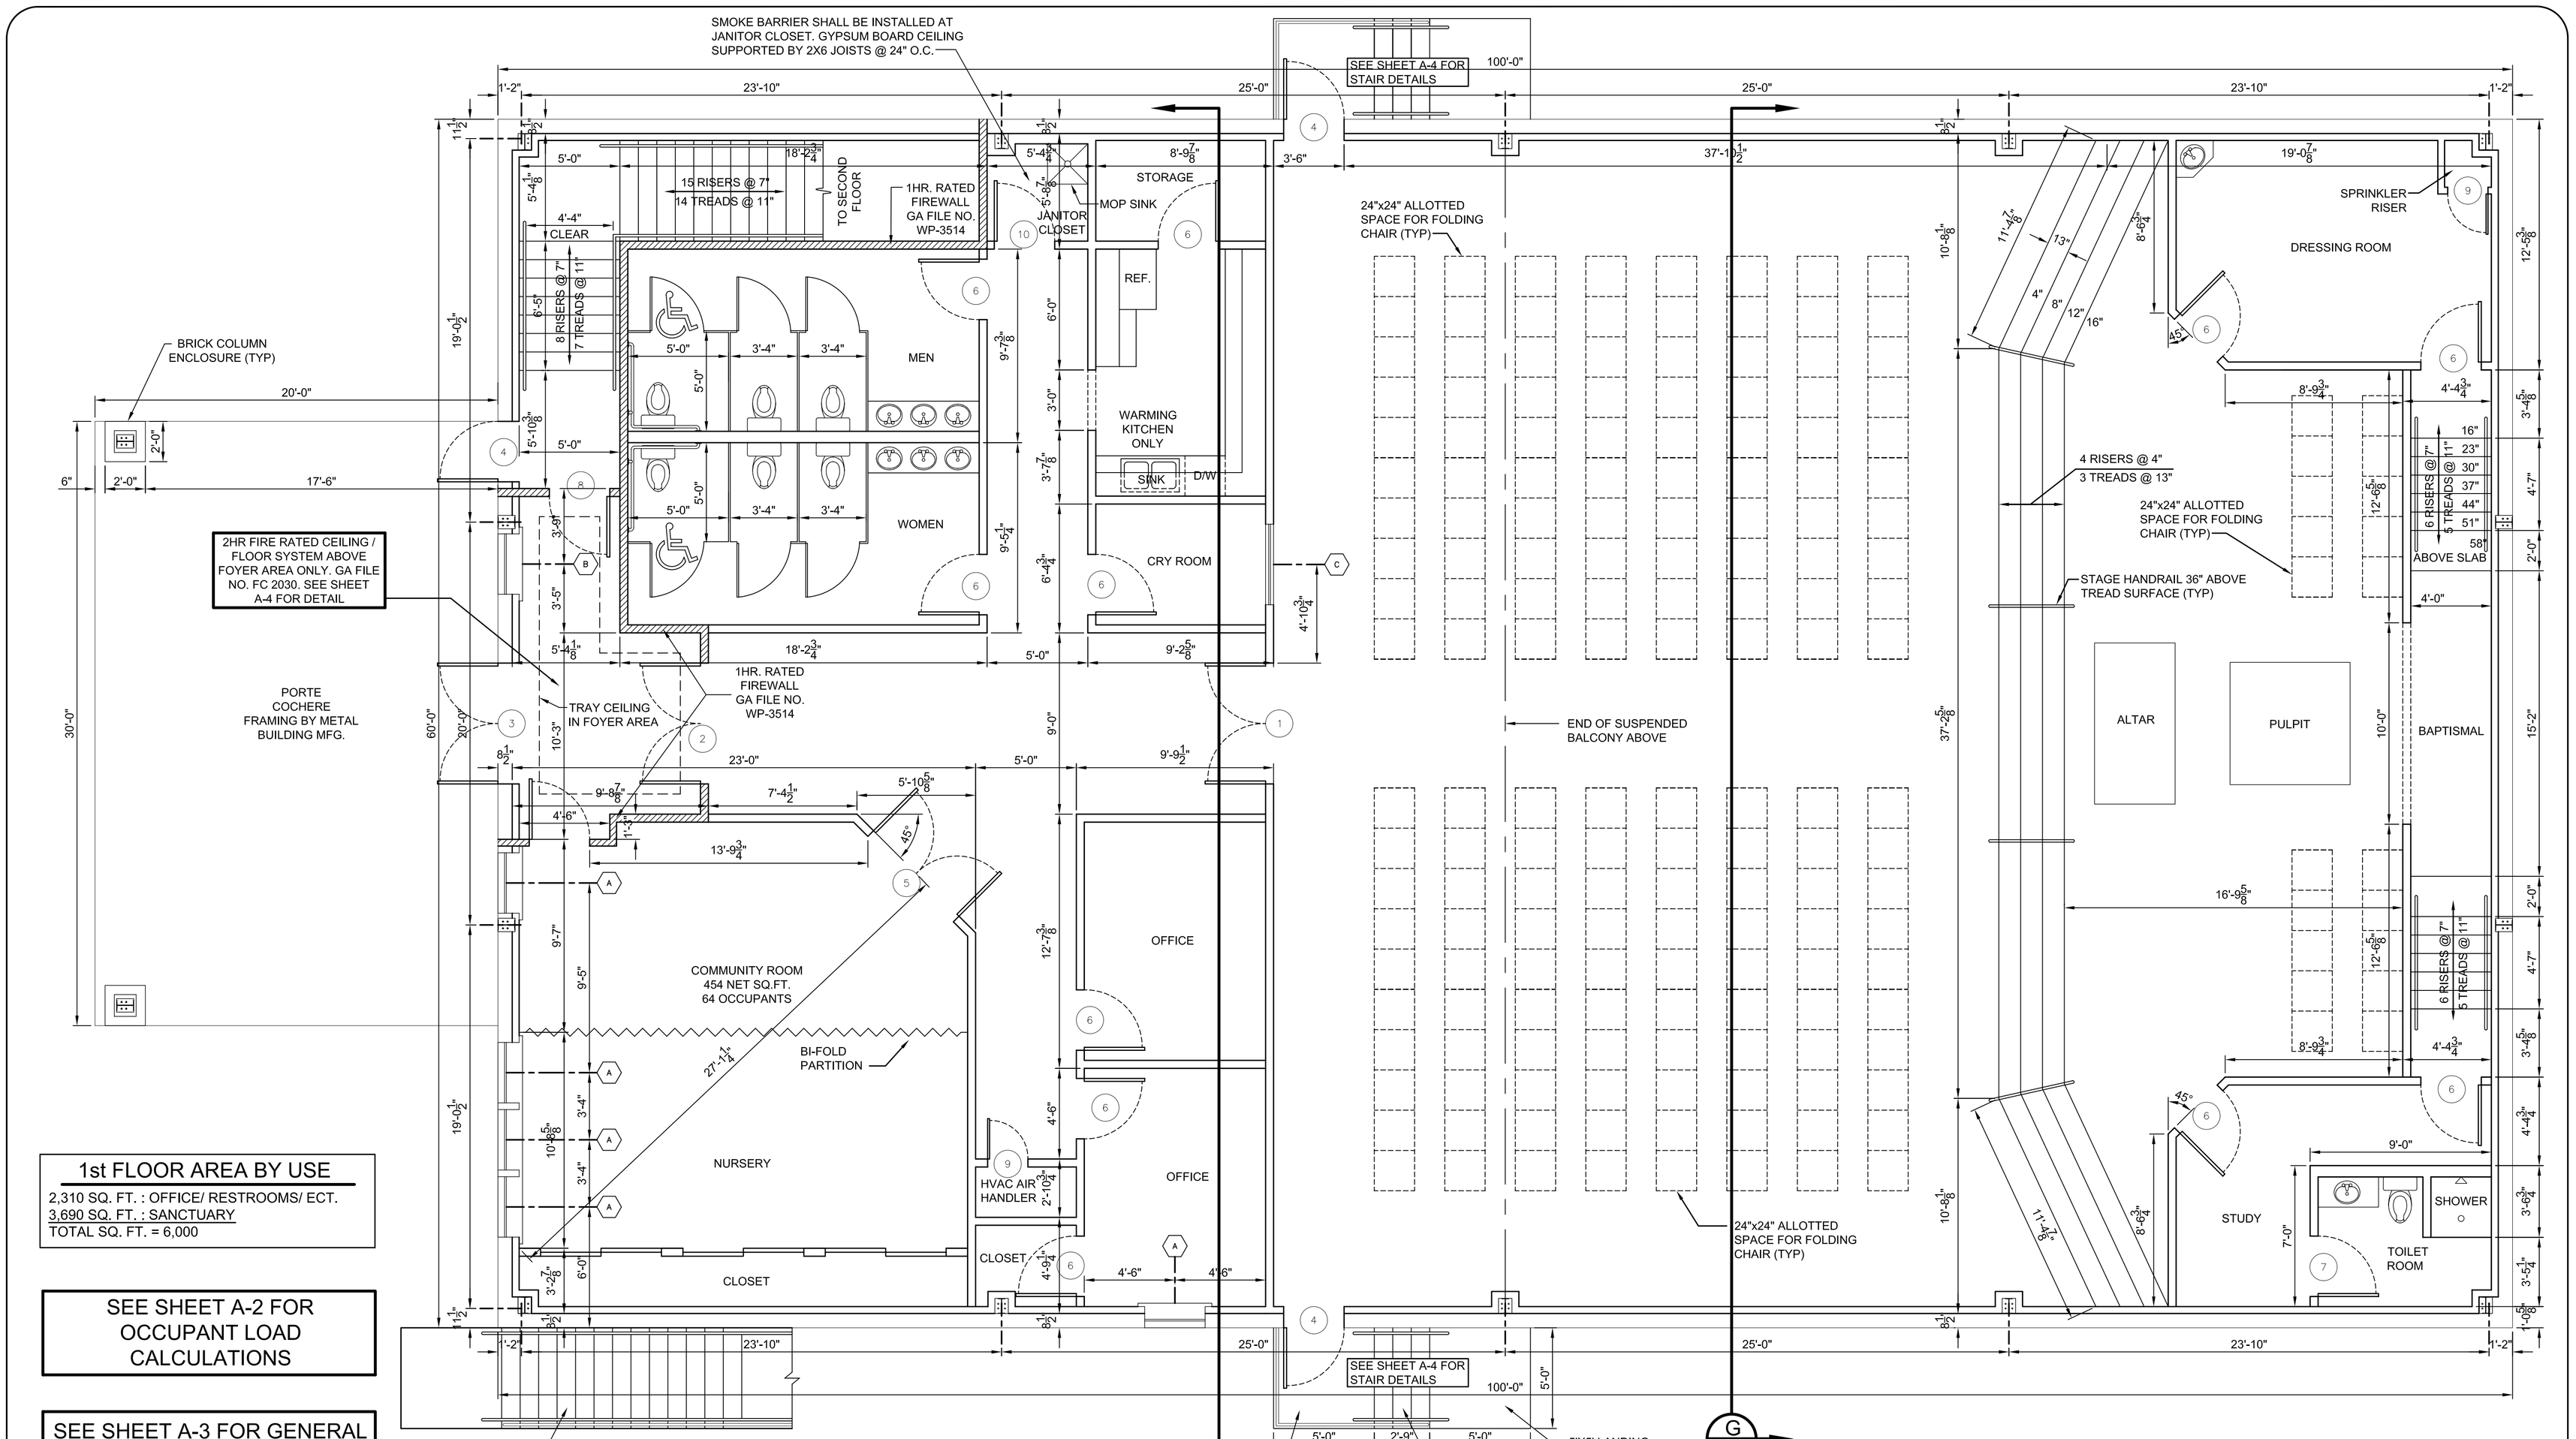

1st FLOOR AREA BY USE

2,310 SQ. FT. : OFFICE/ RESTROOMS/ ECT.
3,690 SQ. FT. : SANCTUARY
TOTAL SQ. FT. = 6,000

SEE SHEET A-2 FOR OCCUPANT LOAD CALCULATIONS

SEE SHEET A-3 FOR GENERAL CONSTRUCTION NOTES

FRAMING NOTE: ALL LOAD BEARING STUD WALLS SHALL BE 16GA. 2x6 STEEL STUDS @16" O.C.

1st FLOOR PLAN

SCALE: 1/4"=1'-0"

FIRST FLOOR FINISH SCHEDULE

NAME	FLOOR: CARPET	FLOOR: CONCRETE	FLOOR: VCT	FLOOR: NONE	BASE: CERAMIC TILE	BASE: WOOD WALL BASE	BASE: VCT BASE	BASE: NONE	WALLS: CERAMIC TILE	WALLS: GYPSUM BOARD	CEILING: 2'X2' LAY-IN PANELS	CEILING: GYPSUM BOARD	REMARKS
OFFICES				●		●				●		●	CEILING HEIGHT 10'
OFFICE CLOSET	●					●				●		●	CEILING HEIGHT 10'
TOILET ROOMS			●		●					●		●	CEILING HEIGHT 10'
COMMUNITY ROOM			●		●					●		●	CEILING HEIGHT 10'
WARMING KITCHEN			●		●					●		●	CEILING HEIGHT 10'
KITCHEN STORAGE ROOM			●		●					●		●	CEILING HEIGHT 10'
JANITORS CLOSET			●		●					●			CEILING HEIGHT 10'
HALLWAYS			●		●					●		●	CEILING HEIGHT 10'
STAIRWELL						●				●		●	CEILING HEIGHT 10'
SANCTUARY	●					●				●		●	CEILING HEIGHT 10'

OWNER TO SELECT STYLE, COLOR, AND BRAND
CROWN MOLDING TO BE INSTALLED IN LOCATIONS SELECTED BY OWNER

FIRST FLOOR DOOR AND HARDWARE SCHEDULE

#	SIZE	TYPE: WOOD	TYPE: METAL	TYPE: ALUM.GLASS	TYPE: STOREFRONT	FRAME: ALUMINUM	FRAME: WOOD	HINGE: DOUBLE SWING	HINGE: BUTT	HINGE: ROLLER PRF	LOCK: PASSAGE	LOCK: PRIVACY	LOCK: DEADBOLT	LOCK: KEYED HANDLE	ACCESSORIES: PUSH PULL	ACCESSORIES: PANIC BAR	ACCESSORIES: THRESHOLD	ACCESSORIES: WEATHERSTRIP	ACCESSORIES: DOOR STOP	ACCESSORIES: ALARM	ACCESSORIES: PEEP HOLE	ACCESSORIES: CLOSER	REMARKS
1	(2) 3/0x6/8x1-3/4"	●			●				●		●					●						●	NOTE #2
2	(2) 3/0x6/8x1-3/4"		●		●				●		●					●						●	60 MIN. FR. NOTE 2. WOOD FINISH
3	(2) 3/0x6/8x1-3/4"	●			●				●					●		●	●			●		●	NOTE #2, WOOD FINISH
4	3/0x6/8x1-3/4"		●		●				●					●		●	●	●		●		●	NOTE #2
5	(2) 3/0x6/8x1-3/4"	●			●				●		●						●					●	
6	3/0x6/8x1-3/4"	●			●				●		●								●			●	
7	3/0x6/8x1-3/4"	●			●				●			●							●				
8	3/0x6/8x1-3/4"	●			●				●		●					●			●			●	60 MIN. FIRE-RATED
9	2/0x3/0x1-3/4"	●					●		●		●												AHU CLOSET
10	3/0x6/8x1-3/4"		●		●				●				●						●			●	JANITOR CLOSET

1. DOORS IN PATH OF EGRESS SHALL BE READILY OPENABLE FROM THE EGRESS SIDE WITHOUT THE USE OF A KEY OR SPECIAL KNOWLEDGE OR EFFORT. (IBC 2003 - 1008.1.8)
2. A READILY VISIBLE SIGN SHALL BE POSTED ON THE EGRESS SIDE ON OR ADJACENT TO THE DOOR STATING: THIS DOOR SHALL REMAIN UNLOCKED WHEN BUILDING IS OCCUPIED. THE SIGN SHALL BE IN LETTERS 1" (25MM) HIGH ON A CONTRASTING BACKGROUND. (IBC 2003 - 1008.1.8.3.: 2.2.)
3. ALL HEADERS SHALL HAVE SOLID BLOCKING.

FIRST FLOOR WINDOW SCHEDULE

#	SIZE	TYPE: FIXED	TYPE: STOREFRONT	TYPE: HORIZ. SLIDE	TYPE: VERT. SLIDE	FRAME: STEEL	FRAME: ALUMINUM	GLASS: RATED	GLASS: TINTED	GLASS: NON-RATED	GLASS: INSULATED	GLASS: NONE	LITES: 72"x18"	ACCESS.: SCREEN	ACCESS.: SHUTTER	ACCESS.: ALARM	ACCESS.: NONE	REMARKS
A	3'-0" x 6'-0"	●				●			●		●		●				●	
B	3'-0" x 6'-0"	●					●	●		●			●				●	45 MIN. FIRE RATED
C	3'-6" x 5'-0"	●					●	●		●			●				●	90 MIN. FIRE RATED

GA FILE NO. WP 3514 GENERIC

ONE LAYER 5/8" TYPE X GYPSUM WALLBOARD OR GYPSUM VENEER BASE APPLIED PARALLEL OR AT RIGHT ANGLES TO EACH SIDE OF 2x4 WOOD STUDS 16" O.C. WITH 1-1/4" TYPE W DRYWALL SCREWS 12" O.C.

JOINTS STAGGERED 16" ON OPPOSITE SIDES. (LOAD BEARING)

1 HOUR FIRE 35 TO 39 STC SOUND

THICKNESS: 4-3/4"
APPROX. WEIGHT: 7 PSF
FIRE TEST: SWRI 01-4511-619, 8-19-02
SOUND TEST: SEE WP 3520 (G&H NG-246FT, 7-2-65)

1st FLOOR PLAN

EUGENE WELLINGTON
ALLEN ROAD
SLIDELL, LOUISIANA

EL-BETHEL PENTECOSTAL CHURCH

DAMMON ENGINEERING. INC.
1095 FLORIDA AVENUE 985-649-5832 SLIDELL, LA. 70458
DAMMONENGINEERING.COM

SCALE:AS NOTED
FILE:
JOB NO. 1819
DATE: 3-29-07
SHEET 10

A-1

OF 22