

GA FILE NO. WP 3380

GENERIC


1 HOUR
FIRE

40 to 44 STC
SOUND

GYPSUM WALLBOARD, WOOD STUDS

One layer 5/8" type X gypsum wallboard or gypsum veneer base applied parallel or at right angles to each side of 2 x 4 wood studs 16" o.c. staggered 8" o.c. on 2 x 6 wood plates with 6d coated nails, 1 7/8" long, 0.0915" shank, 1/4" heads, 7" o.c.

Joints staggered 24" on opposite sides. Horizontal bracing required at mid-height. **(LOAD-BEARING)**

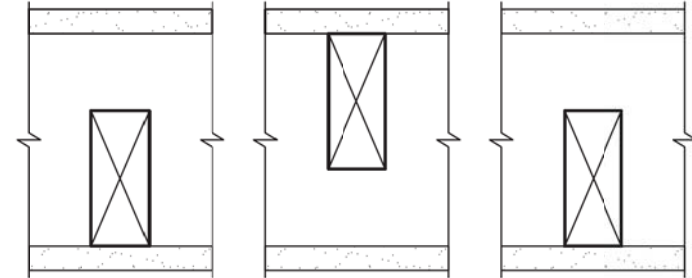

Thickness: 7³/₄"
Approx. Weight: 8 psf
Fire Test: See WP 3605
(UL R1319-4, 6, 6-17-52;
UL R2717-39, 1-20-66;
UL R3501-52, 3-15-66,
UL Design U305;
ULC Design W301)
Sound Test: Estimated

