


**NOTE: INSTALL 1/4" STEEL LINTEL ABOVE VENT HOLE.
REPLACE ANY BLOCKS THAT ARE
DAMAGED WHEN ADDING VENTS.**

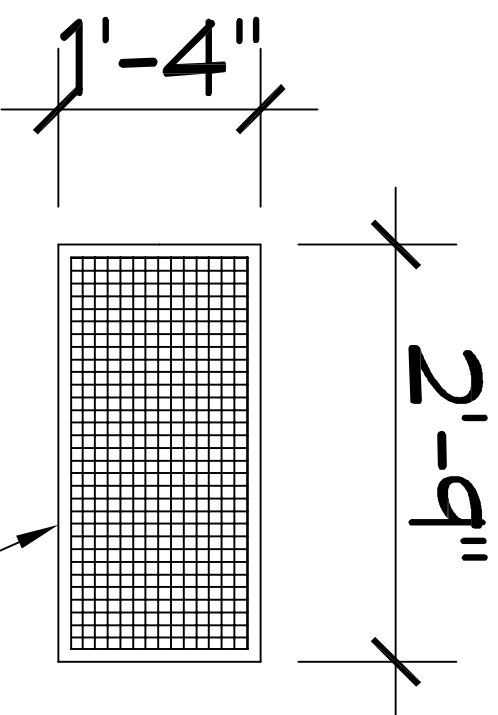

**2" X 4" TREATED WOOD FRAME VENT
WITH 1/8" MESH SCREEN. USE (6) 1/4" X 2 1/2"
LAG BOLTS TO BLOCKS. CAULK AROUND
EDGES OF BLOCK TO WOOD TO MATCH
COLOR OF HOUSE.**

DAMMON
ENGINEERING, INC.
LOUISIANA & MISSISSIPPI

Chief Engineer: Brian Mstich, PE
554 Old Spanish Trail
Slidell, LA 70458

www.dammonengineering.com
info@dammonengineering.com
PH: 985.649.5832

REVISIONS		
#	DESCRIPTION	DATE
1	SUPPLEMENTAL INFORMATION #2	5/10/2018

NEW BUILDING FOR BAKERY - PICKUP & DELIVERY

LOT 11A, SQUARE 4
LELIA PLACE SUBDIVISION
DAVID DR.
METAIRIE, LA

JOB No: 2312 DATE: 5/10/2018
DRAWN BY: DFD CHECKED BY: CKD

I warrant that the drawings and specifications herein were prepared by me or under my direct supervision and that I am a duly Licensed Professional Engineer in the State of Louisiana. I warrant that the drawings and specifications herein were prepared by me or under my direct supervision and that I am a duly Licensed Professional Engineer in the State of Louisiana. I warrant that the drawings and specifications herein were prepared by me or under my direct supervision and that I am a duly Licensed Professional Engineer in the State of Louisiana.

SHEET TITLE:
WOOD FRAME VENT

DRAWING NUMBER:
S-3

SHEET No. 3 of 3