



**LIFE-SAFETY INFORMATION**

<b>APPLICABLE CODES</b>	NFPA 101 LIFE-SAFETY CODE 2012
<b>OCCUPANCY B, CONSTRUCTION TYPE II B</b>	
<b>OCCUPANT LOAD FACTOR</b>	(REFERENCE TABLE 7.3.1.2) 100 SF PER OCCUPANT 90 OCCUPANTS
<b>BUSINESS AREA + 3000 SQ.FT. (GROSS)</b>	
<b>TOTAL OCCUPANTS = 90</b>	
<b>CLASSIFICATION OF HAZARD OF CONTENTS</b>	(REFERENCE OCCUPANCY CHAPTER AND 6.2.2 SPECIFY LOW ORDINARY OR HIGH)
<b>CONSTRUCTION TYPE(S)</b>	(REFERENCE CHAPTERS TABLE A.2.1.2 AND COMMENTARY TABLE B.1 IN HANDBOOK)
<b>MINIMUM EXIT SEPARATION DISTANCE FOR REMOTELY LOCATED EXITS</b>	(REFERENCE SECTION 7.5 SPECIFY 1/2 OR 1/3 DIAGONAL DISTANCE OF AREA SERVED) N/A
<b>MAXIMUM DEAD-END CORRIDORS</b>	(REFERENCE OCCUPANCY CHAPTER AND TABLE A.7.6)
<b>MAXIMUM COMMON PATH OF TRAVEL DISTANCE</b>	(REFERENCE OCCUPANCY CHAPTER AND TABLE A.7.6)
<b>MAXIMUM TRAVEL DISTANCE TO EXITS</b>	(REFERENCE OCCUPANCY CHAPTER AND TABLE A.7.6)
<b>MAIN ENTRANCE MUST BE SIGNED TO ACCOMMODATE 1/2 OCCUPANT LOAD OF BUILDING</b>	
<b>EXTINGUISHMENT REQUIREMENTS</b>	(SPRINKLER NOT REQUIRED)
<b>DETECTION, ALARM, AND COMMUNICATION SYSTEMS</b>	NO
<b>ALLOWABLE HEIGHT AND BUILDING AREA</b>	PER IBC EQUIVALENT CONSTRUCTION TYPE
<b>BUILDING CODE INFORMATION</b>	
<b>APPLICABLE CODES</b>	
<b>OCCUPANCY B, BUSINESS GROUP B</b>	(IBC 2015 CHAPTER 10)
<b>OCCUPANT LOAD CALCULATIONS</b>	(TABLE 1004.1.2) 100 SF PER OCCUPANT (GROSS) 90 OCCUPANTS
<b>BUSINESS AREA + 3000 SQ.FT.</b>	
<b>CONSTRUCTION TYPE(S)</b>	(TABLE 609)
<b>II B (SECTION 609)</b>	
<b>ALLOWABLE HEIGHT AND BUILDING AREA LIMITED BY TYPE OF CONSTRUCTION</b>	2 14800
<b>MAXIMUM HEIGHT IN STORES (SECTION 609.4.504 TABLE 609)</b>	
<b>MAXIMUM AREA IN SQUARE FEET (SECTION 609.4.507 TABLE 609)</b>	
<b>WIND SPEED DESIGN REQUIREMENTS</b>	
THIS BUILDING SHALL BE DESIGNED WITH IBC SEC. 1609 AS A FULLY ENCLOSED BLDG USING THE FOLLOWING INFORMATION:	
<b>WIND DESIGN DATA:</b>	
DETERMINATION OF WIND LOADS SHALL BE IN ACCORDANCE WITH IBC SEC. 1609.3 (A), (B), OR (C) DEPENDING ON THE RISK CATEGORY	
<b>BASIC WIND SPEED (3 SECOND 619T) :</b>	132 MPH (IBC FIG. 1609C)
<b>RISK FACTOR:</b>	C
<b>CATEGORY I BLDG</b>	
<b>TOPOGRAPHIC FACTOR = 1</b>	EXPOSURE = C
<b>DESIGN WIND PRESSURE (ASCE 7-10 TABLE 26.6-1):</b>	34.7 PSF
<b>INTERNAL PRESSURE COEFFICIENT (ASCE 7-10 TABLE 26.11-1):</b>	± 0.18
<b>LIVE LOADS (IBC SEC. 1607)</b>	125 PSF
<b>STORAGE LIGHT (IBC TABLE 1607.1):</b>	20 PSF (UNIFORM), 300 LB CONCENTRATED
<b>ROOF LIVE LOADS (IBC TABLE 1607.1):</b>	5 PSF
<b>SNOW LOADS (IBC TABLE 1608):</b>	
<b>GROUND SNOW LOAD (IBC FIG. 1608.2):</b>	
<b>FLOOD ZONE INFORMATION</b>	
<b>BASED ON THE SURVEY OF THIS PROPERTY BY R.M. KEEBBS, LLC, THIS PROPERTY IS IN SPECIAL FLOOD HAZARD AREA, F.I.A.M. COMMUNITY MAP NO. 235204</b>	
<b>FLOOD ZONE:</b>	AE
<b>ELEVATIONS REFER TO NAVD 1929 DATUM</b>	BASE FLOOD ELEVATION NAVD 9'0"
<b>LIFE-SAFETY LEGEND</b>	
<b>SYMBOL</b>	<b>DESCRIPTION</b>
EXIT	EXIT
DOOR FIRE RATING (MINUTES)	DOOR FIRE RATING (MINUTES)
DOOR WIDTH/REGRESS CAPACITY	DOOR WIDTH/REGRESS CAPACITY
EXIT LIGHT	EXIT LIGHT
FIRE EXTINGUISHER W/ WALL MTD BRACKET	FIRE EXTINGUISHER W/ WALL MTD BRACKET
COMMON PATH OF TRAVEL	COMMON PATH OF TRAVEL
TRAVEL DISTANCE	TRAVEL DISTANCE
REGION POINT	REGION POINT

**OLD TOWN KITCHENS  
227 COUSIN STREET  
SLIDELL, LA 70458**

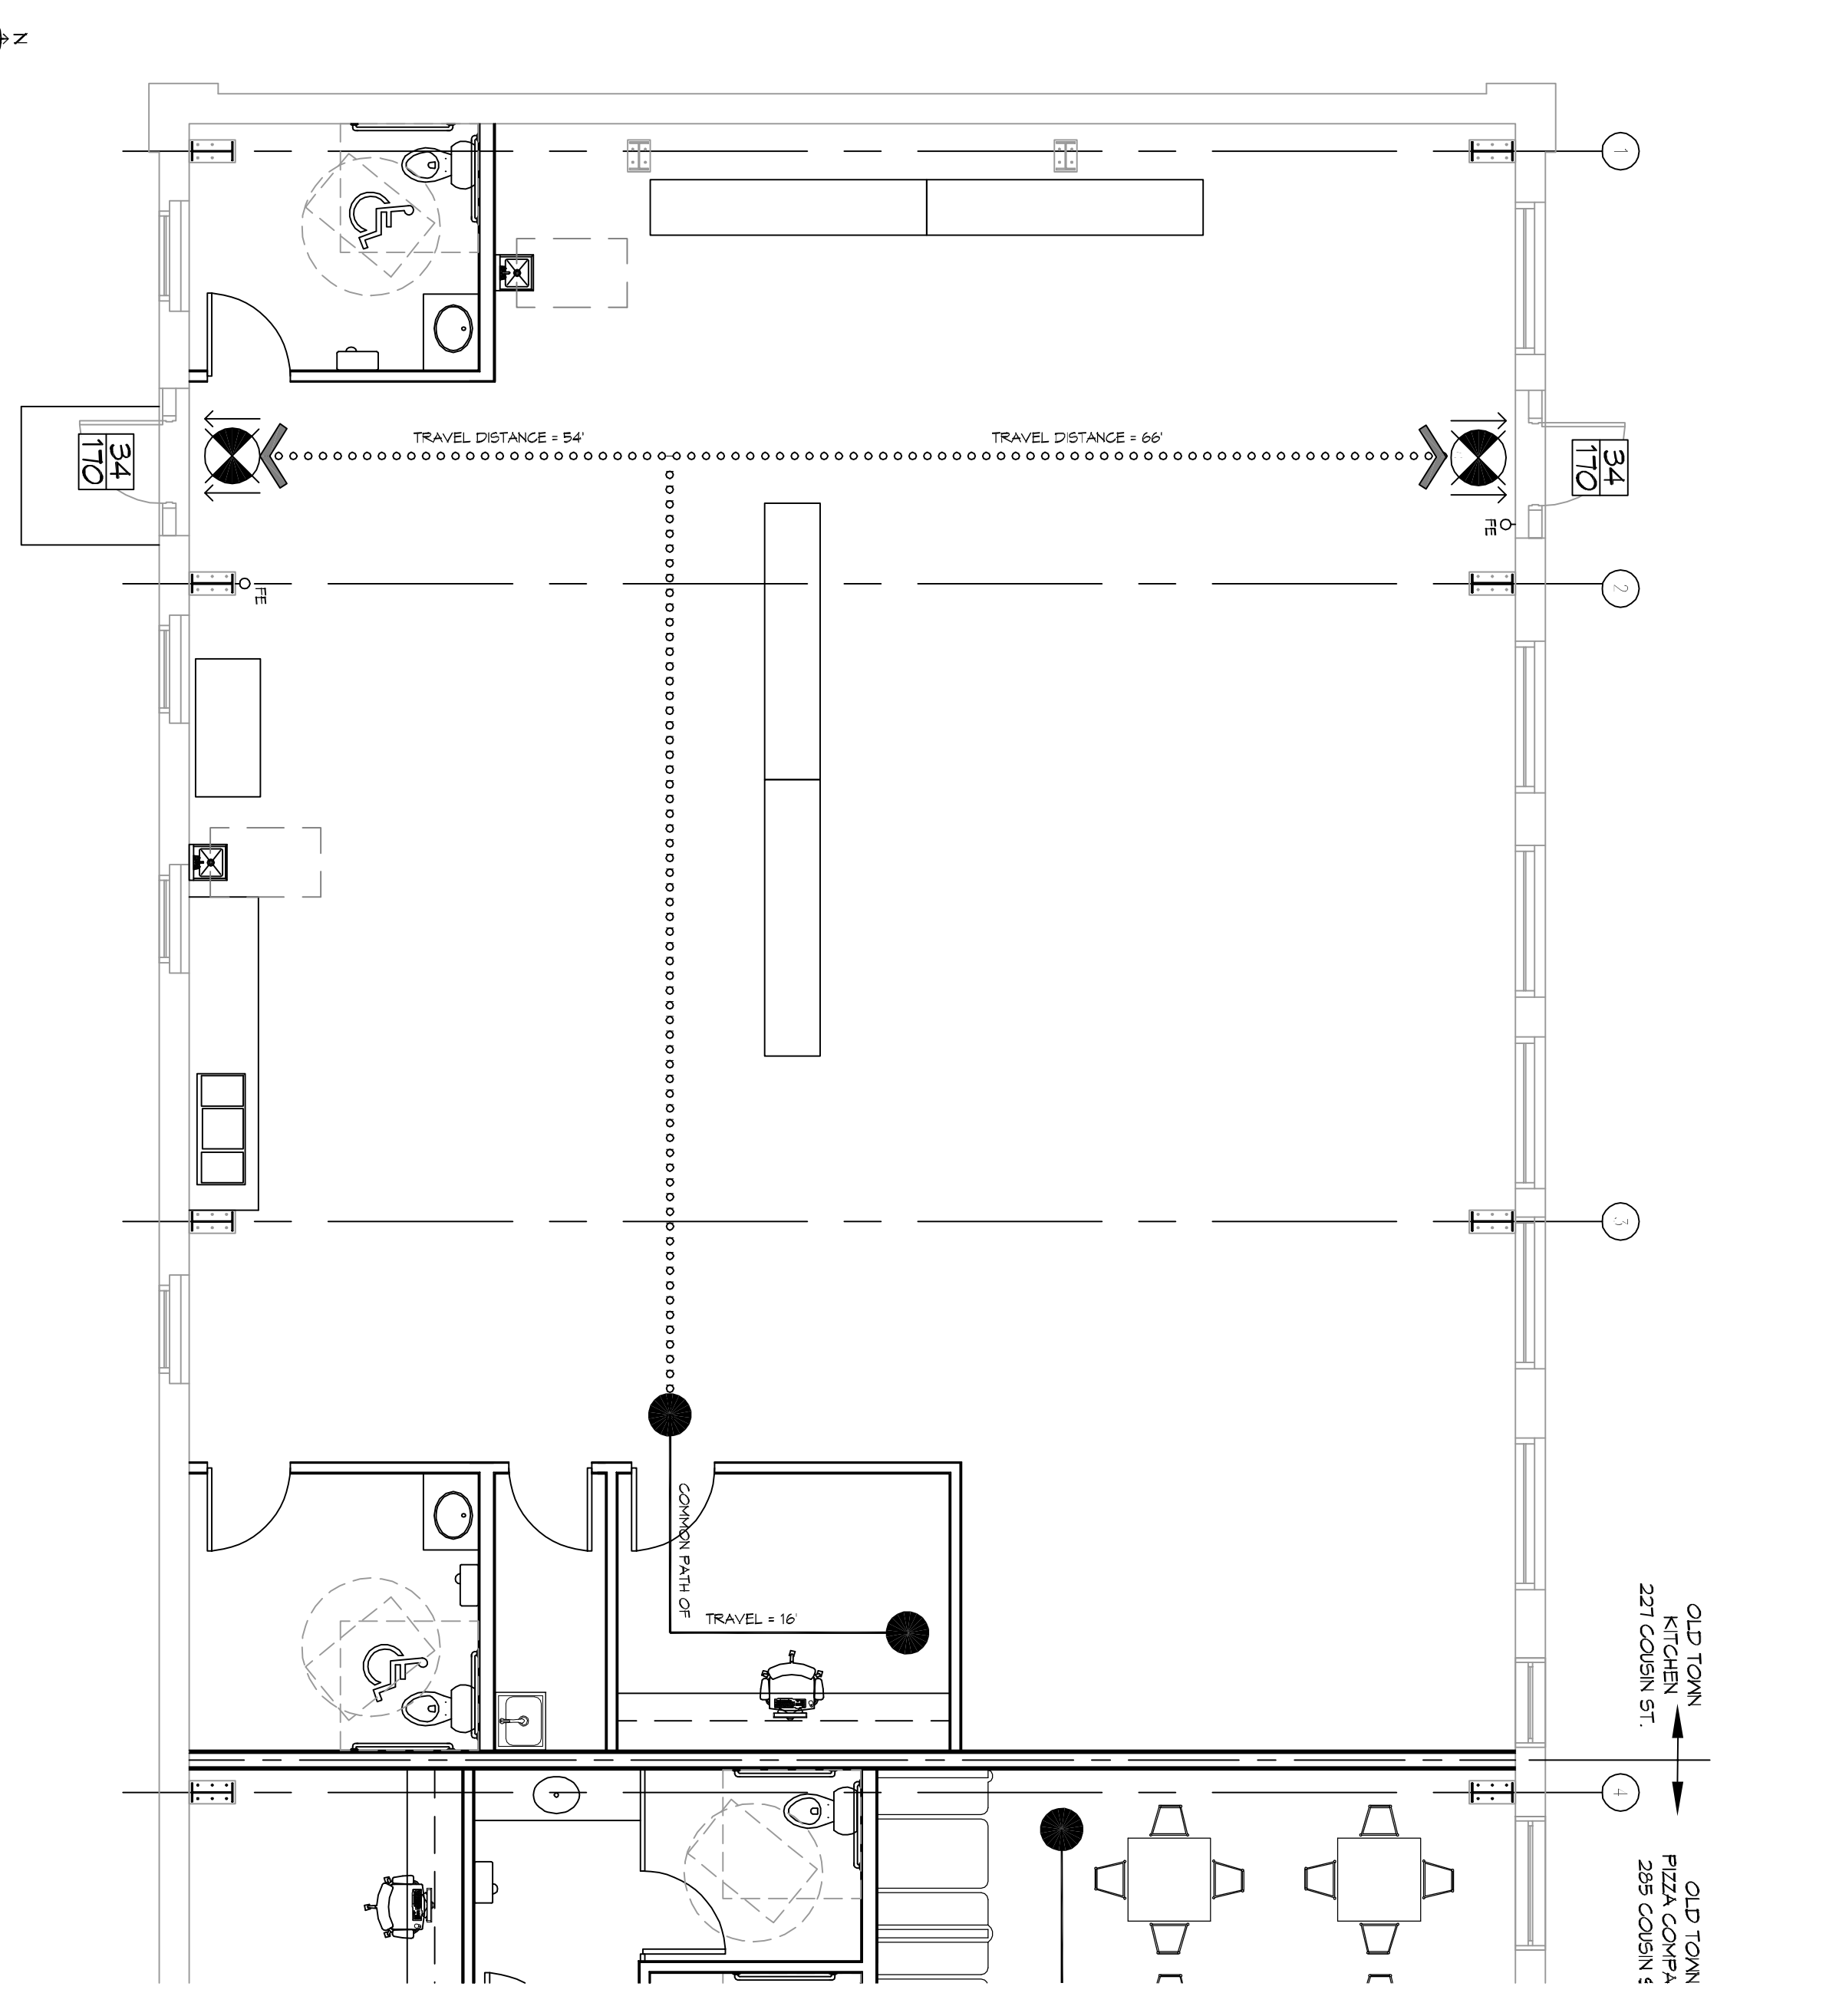

**LIFE-SAFETY PLAN**  
SCALE: 3/16" = 1'-0"

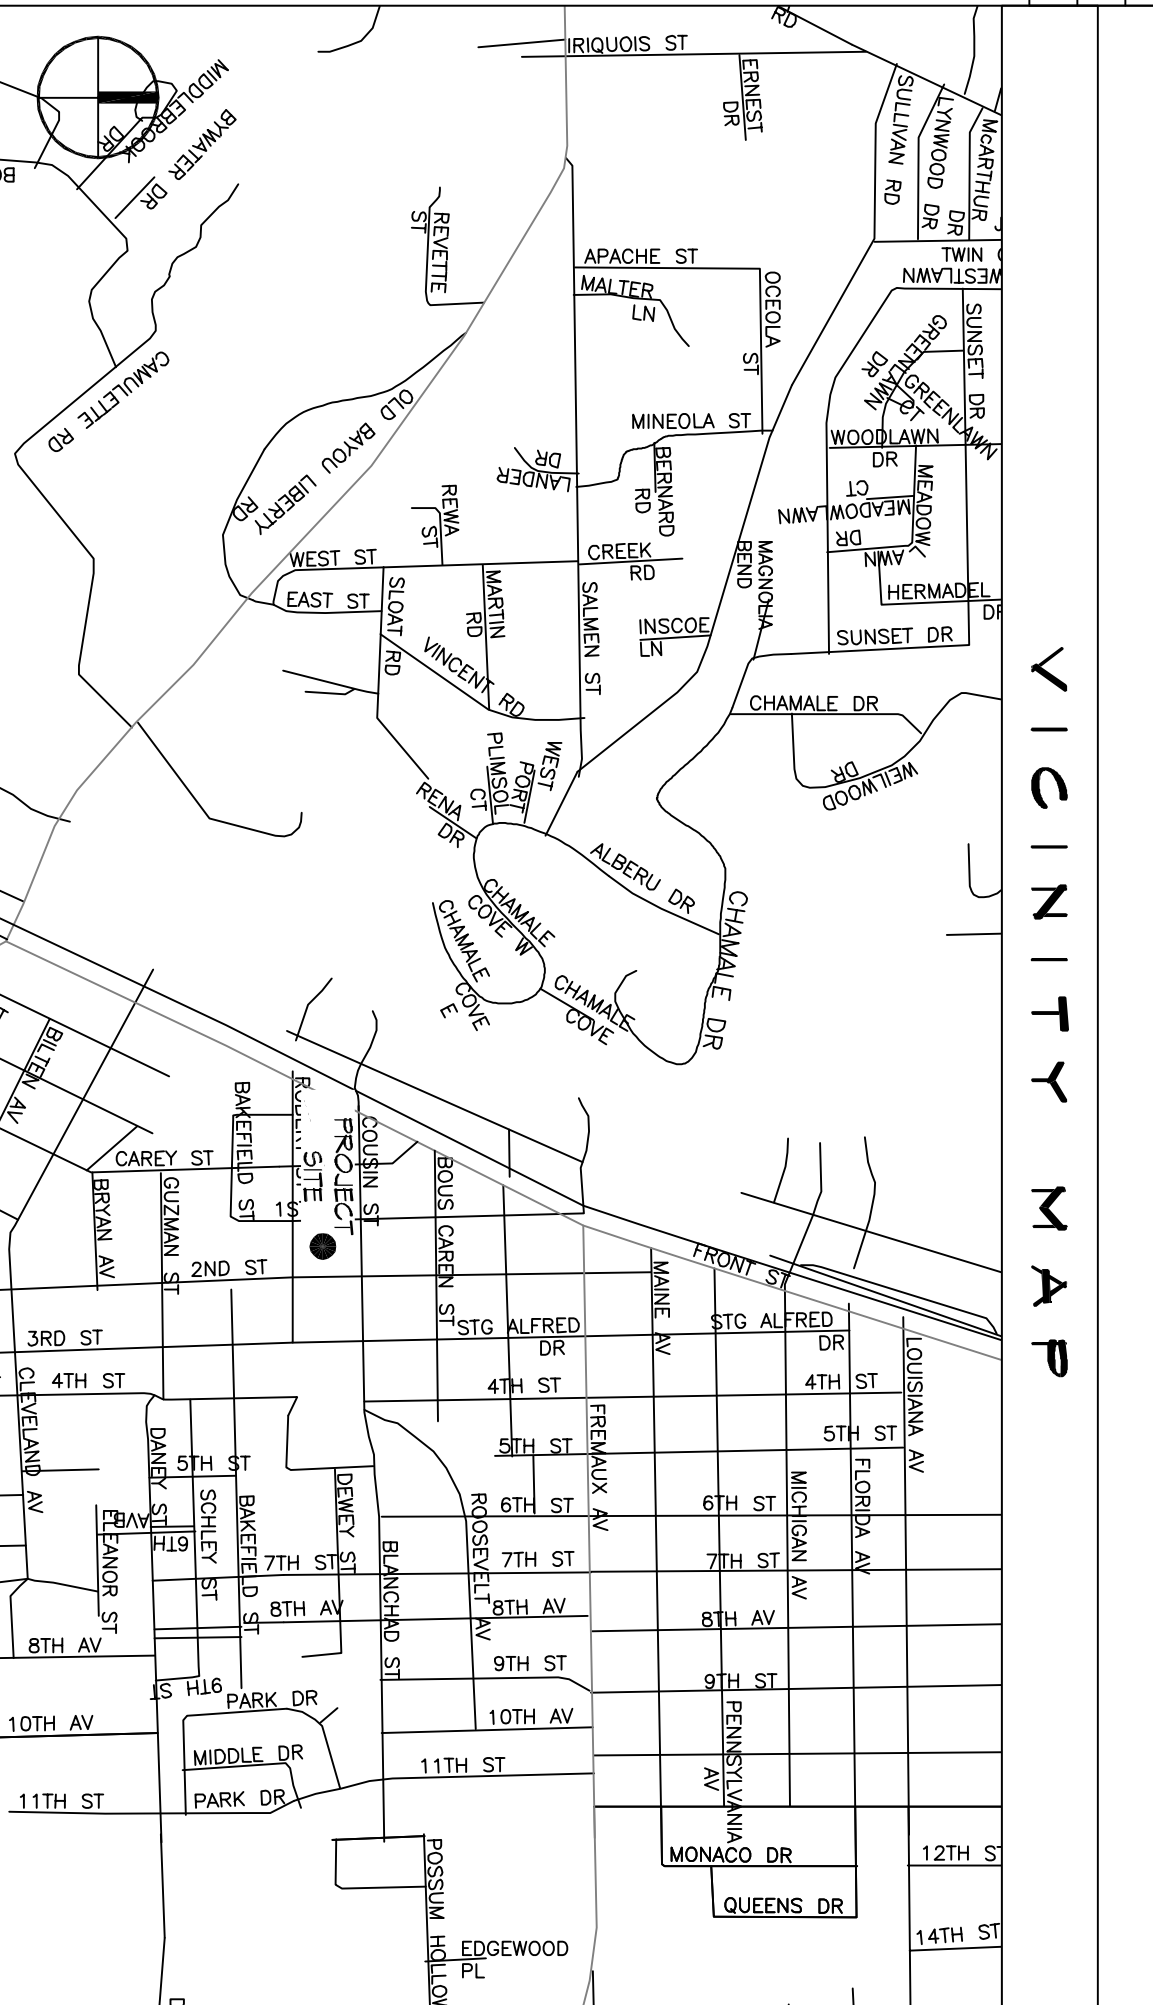

**SHEET INDEX**

SHEET #	SHEET TITLE
6101	GENERAL INFORMATION SHEET
6102	ACCESSIBILITY INFORMATION
6101	SITE PLAN
6102	SITE UTILITIES PLAN
A101	FLOOR PLAN
P101	PLUMBING PLAN
M101	MECHANICAL FLOOR PLAN, SCHEDULES & DETAILS
E101	POWER AND LIGHTING PLAN
E102	PANEL SCHEDULES

**GENERAL NOTES**

1. ALL MATERIALS AND WORK INCIDENTAL TO THE CONSTRUCTION OF THIS PROJECT SHALL CONFORM TO ALL GOVERNING CODES, AND REGULATIONS OR AGENCIES IN JURISDICTION.
2. CONTRACTOR SHALL PROVIDE ALL PUBLIC PROTECTIONS NECESSARY AS REQUIRED BY LAW.
3. THE DRAWINGS AND ANY SUBSEQUENTLY ISSUED AMENDMENTS OR REVISIONS SHALL BE THE PROPERTY OF THE ARCHITECT. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND APPROVALS FROM THE APPROPRIATE AGENCIES.
4. DO NOT SCALE DRAWINGS. CONSULT WITH THE ENGINEER REGARDING ANY ITEMS IN THE CONTRACT DOCUMENTS THAT REQUIRE CLARIFICATION.
5. TRASH SHALL BE REMOVED FROM THE SITE NOT LESS THAN TWICE MONTHLY.
6. THE GENERAL CONTRACTOR SHALL VERIFY EXISTING CONDITIONS PRIOR TO COMMENCING WORK AND REPORT ANY AND ALL DISCREPANCIES TO THE ARCHITECT.
7. CONTRACTOR VEHICLES AND EQUIPMENT NECESSARY FOR CONSTRUCTION MAY BE PARKED ON THE SITE. OTHER VEHICLES PARKED ON THE SITE REQUIRE THE OWNER'S PERMISSION.
8. ALL MATERIALS/EQUIPMENT SHALL BE INSTALLED PER MANUFACTURER'S RECOMMENDATIONS. WORK NOT CONSISTENT WITH MANUFACTURER'S RECOMMENDATIONS WILL BE REJECTED BY OWNER/ARCHITECT.

**DAMMON ENGINEERING, INC.**  
LOUISIANA & MISSISSIPPI

Chief Engineer: Brian Mistich, PE  
554 Old Spanish Trail  
Slidell, LA 70458  
www.dammonengineering.com  
info@dammonengineering.com  
PH: 985.649.5832

**REVISIONS**

#	DESCRIPTION	DATE

**NEW PREP FACILITY**

227 COUSIN STREET  
SLIDELL, LA 70458

JOB No: 2324 DATE: 11-21-17  
DRAWN BY: CKD CHECKED BY: CKD

SHEET TITLE: GENERAL INFORMATION SHEET  
DRAWING NUMBER: 6101  
SHEET No: 1 of 4