HARD & GREEN SPACE

EXISTING CONCRETE PARKING = 7168.00 SQ. FT.
EXISTING GRASS & LANDSCAPING (PERMEABLE) = 631.00 SQ. FT.
NEW 24" LIMESTONE PARKING (PERMEABLE) = 4686.00 SQ. FT.
BUILDING AREA = 8,760 SQ. FT.
TOTAL AREA = 21,245.00 SQ.FT.

GENERAL PAVING NOTES

1. ALL SUB GRADE FILL SHALL BE SELECT GRANULAR MATERIAL COMPACTED TO 95% STANDARD PROCTOR DENSITY IN A MAXIMUM OF 6" LIFTS.
2. ANY WORK WITHIN THE ROADWAY OR ADJACENT TO THE ROADWAY CAUSING AN INTERFERENCE TO VEHICULAR TRAFFIC MUST CONFORM TO THE REQUIREMENTS SET FORTH BY THE UNIFORM MANUAL OF TRAFFIC CONTROL DEVICES OF THE STATE OF LOUISIANA. THE CONTRACTOR MUST FURNISH ALL NECESSARY TRAFFIC SIGNS AND/OR BARRICADES AND MAINTAIN THEM DURING CONSTRUCTION ACTIVITY.

PAVING LEGEND

TOL XXX.X — TOP OF LIMESTONE
PARKING WHEEL STOP
x-0.0 EXISTING TOPO

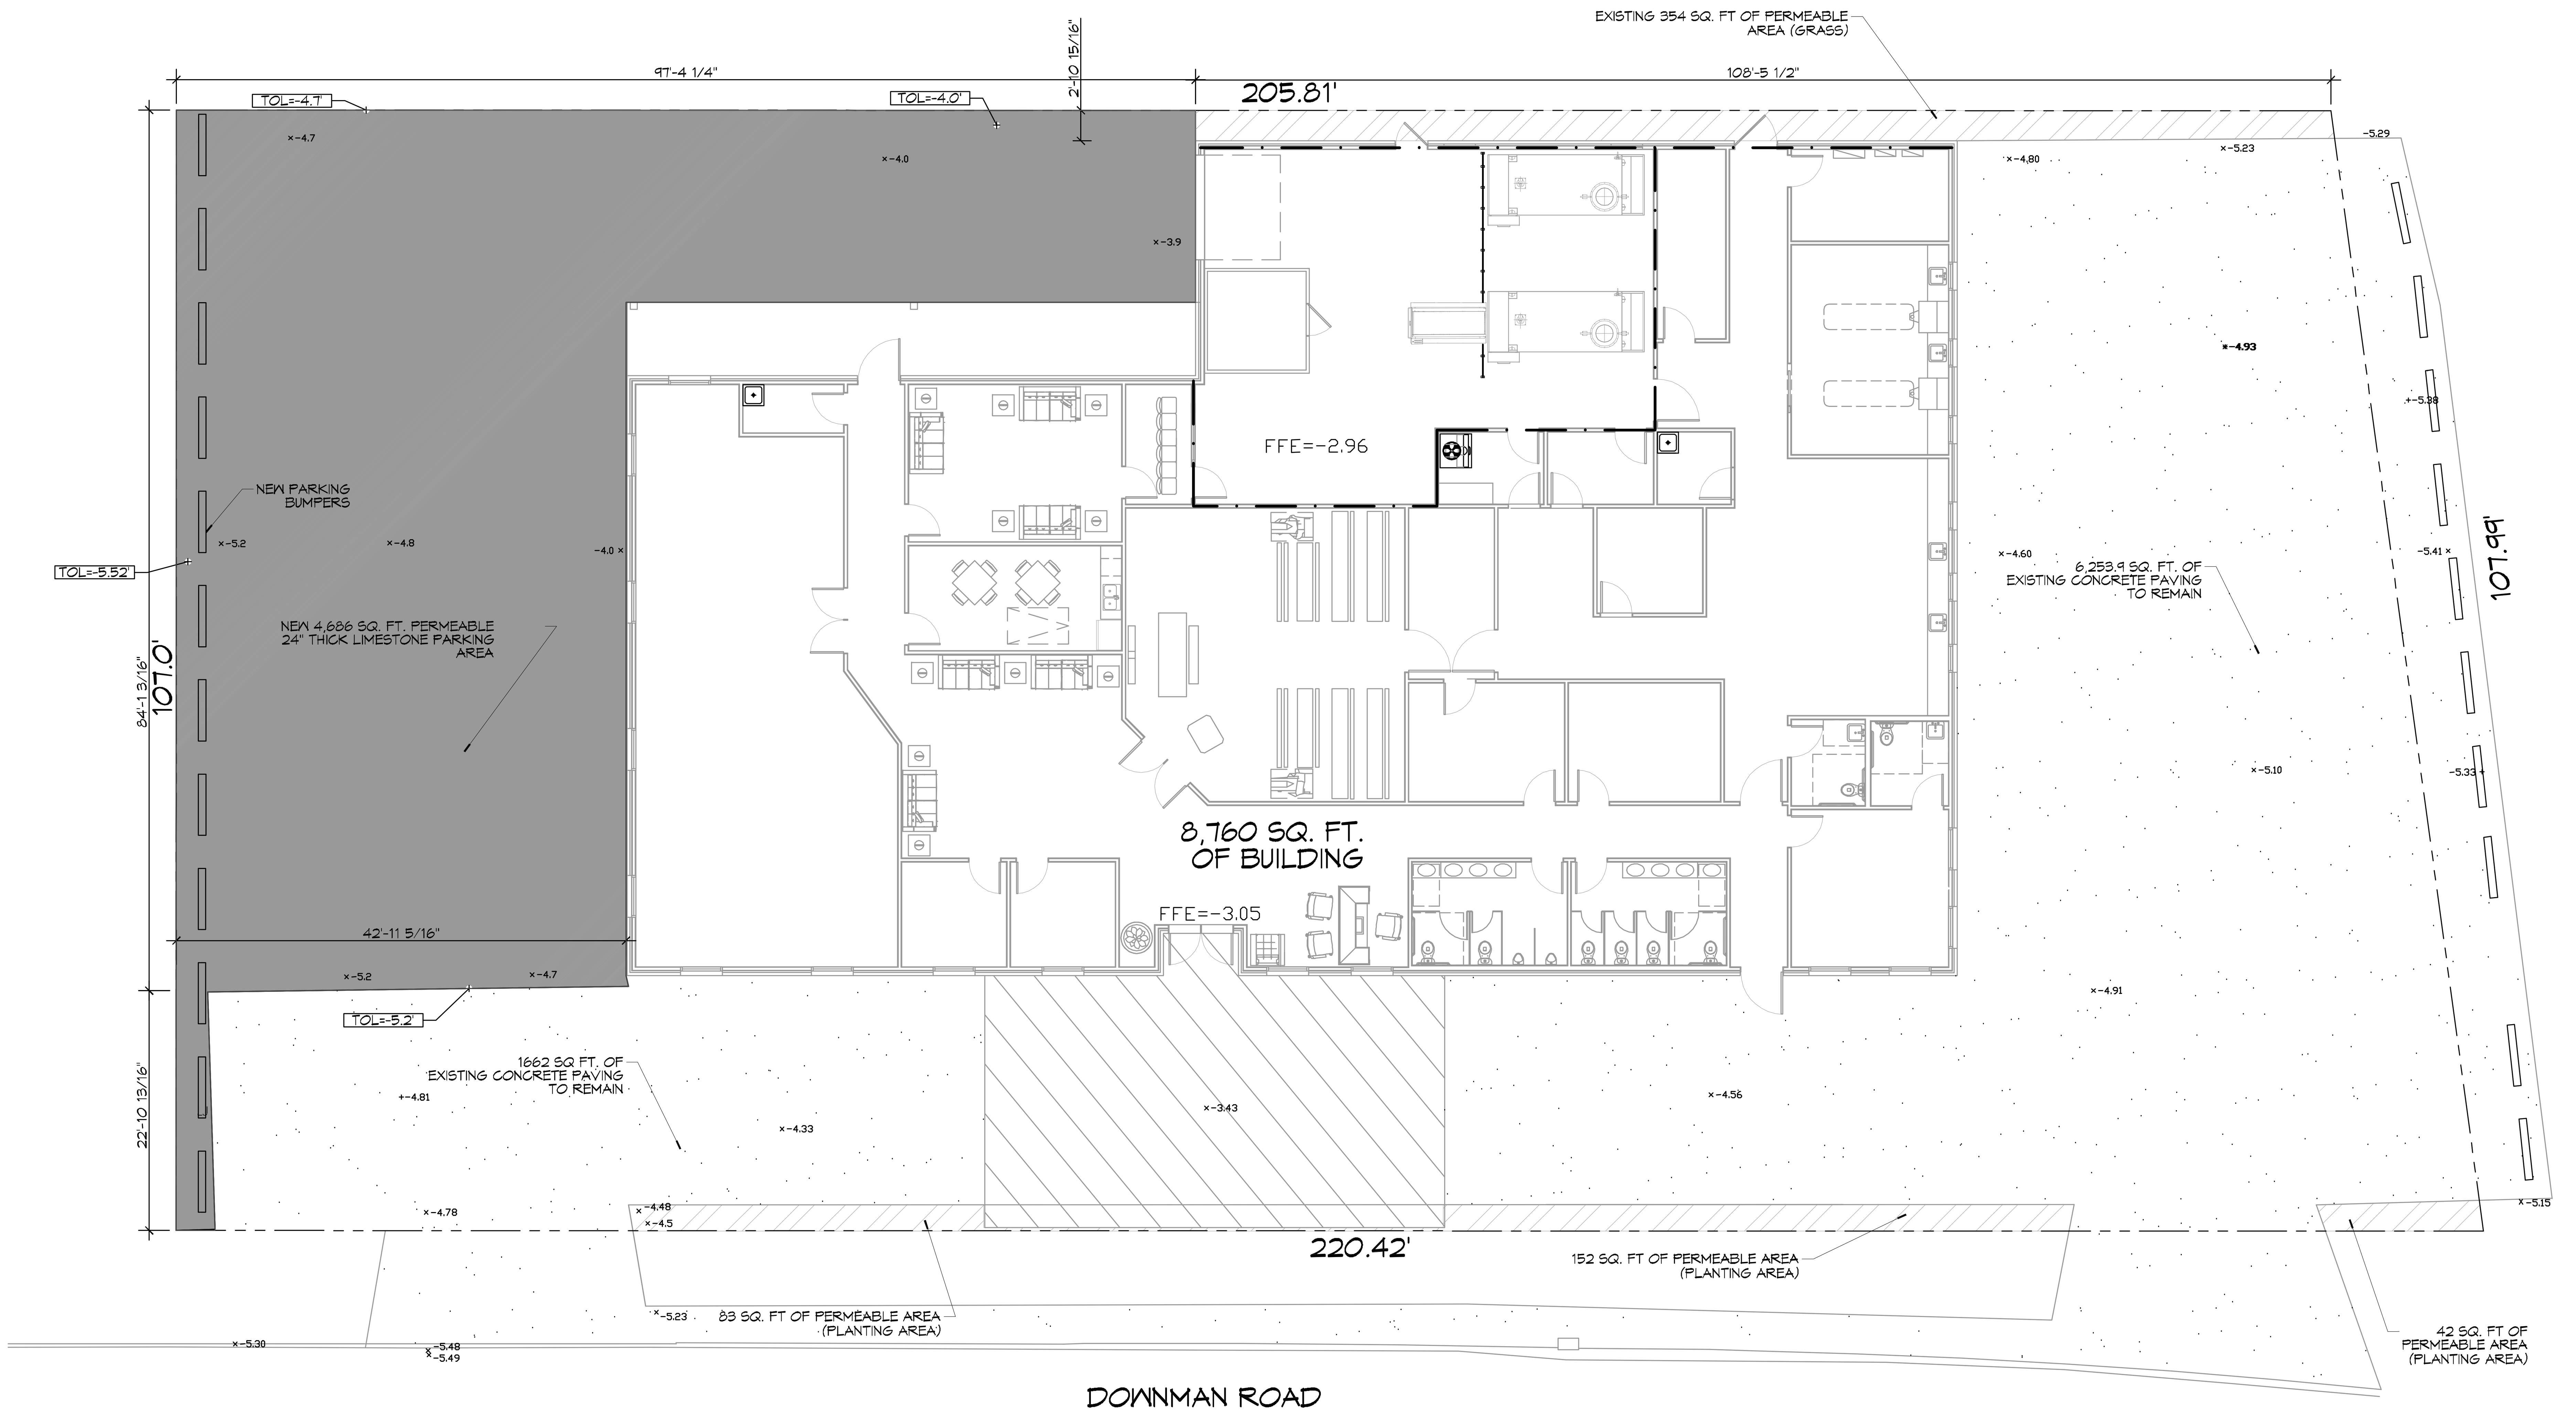

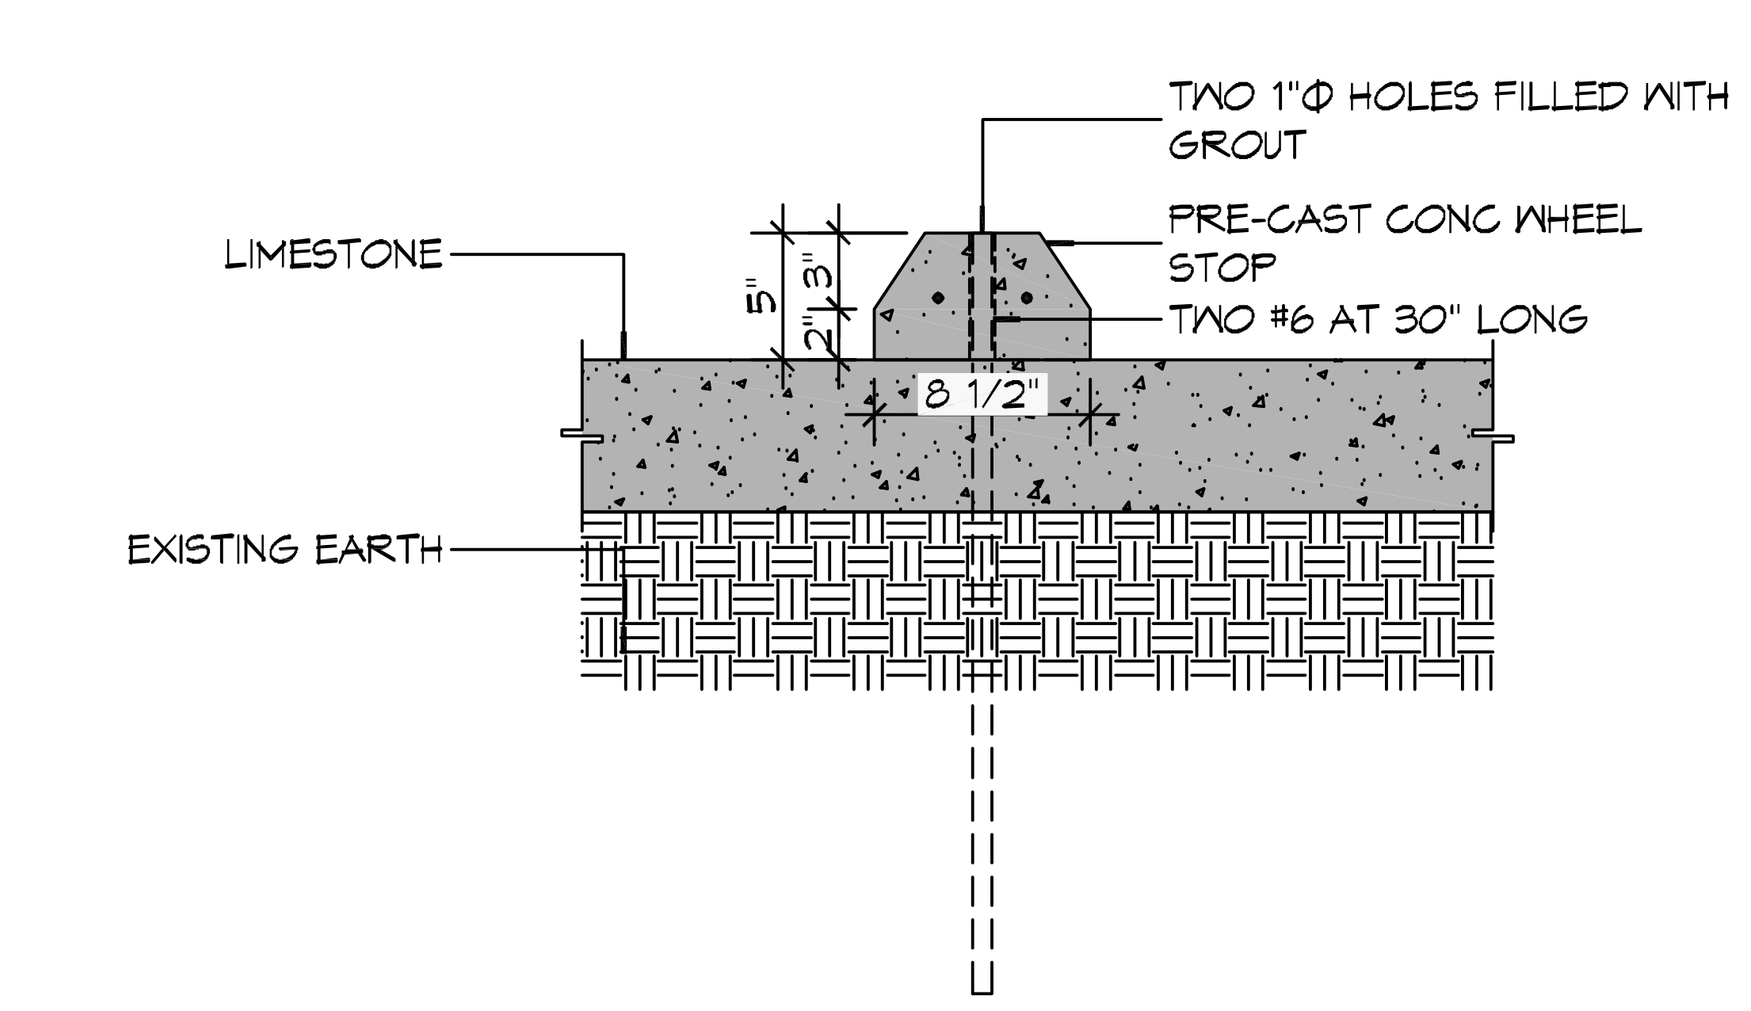

A TYPICAL WHEEL STOP

7 PAVING PLAN
SCALE: 1" = 10'-0"

8 PAVING DETAILS
SCALE: 1" = 1'-0"

DAMMON ENGINEERING, INC.
LOUISIANA & MISSISSIPPI
Chief Engineer: Brian Mistich, PE
554 Old Spanish Trail
Slidell, LA 70458
www.dammonengineering.com
info@dammonengineering.com
PH: 985.649.5832

REVISIONS		
#	DESCRIPTION	DATE

SEAL:

NEW FUNERAL HOME

BOYD FAMILY FUNERAL HOME

4800 DOWNMAN ROAD
NEW ORLEANS, LA

JOB No:	2346	DATE:	11-10-2020
DRAWN BY:	CKD	CHECKED BY:	CKD

SHEET TITLE:
PAVING PLAN

DRAWING NUMBER:
C102

SHEET No: 4 of # 21