

ONE-LINE DIAGRAM/ELEVATION AT SERVICE ENTRANCE METER STATION
SCALE: NONE

GENERAL ELECTRICAL NOTES

- ALL WORK SHALL CONFORM TO THE LATEST EDITION OF THE NATIONAL ELECTRICAL CODE, THE GOVERNING ELECTRICAL CODE AND ALL OTHER INSPECTION DEPARTMENTS HAVING JURISDICTION. OBTAIN CERTIFICATES OR APPROVAL WHERE REQUIRED.
- ALL MATERIALS FURNISHED SHALL BE NEW AND SHALL BE U.L. LISTED.
- THE DRAWINGS INDICATE SIZE AND GENERAL LOCATION OF WORK. SCALE DIMENSIONS SHALL NOT BE USED. THE EXACT LOCATION AND LOCATION OF ALL LIGHTING FIXTURES, RECEPTACLES AND TELEPHONE OUTLETS, ETC. SHALL BE DETERMINED BY ACTUAL CONDITIONS IN THE FIELD.
- PRIOR TO BIDDING, CONTRACTOR SHALL VISIT THE JOB SITE AND FAMILIARIZE THEMSELVES WITH THE EXISTING CONDITIONS.
- ELECTRICAL CONTRACTOR SHALL COORDINATE HIS WORK WITH OTHER TRADES AND WITH OTHER CONTRACTORS WHOSE WORK MAY AFFECT THIS INSTALLATION.
- ELECTRICAL CONTRACTOR SHALL COORDINATE INCOMING ELECTRICAL SERVICE WITH UTILITY COMPANY AND INCLUDE IN HIS BID ALL CHARGES AND FEES INCURRED IN MODIFICATIONS.
- WHERE MORE THAN ONE SWITCH OCCURS IN THE SAME LOCATION, THEY SHALL BE INSTALLED IN A GANG TYPE BOX UNDER ONE COVER PLATE.
- ELECTRICAL CONTRACTOR SHALL COORDINATE THE TELEPHONE INSTALLATION WITH THE TELEPHONE COMPANY AND THE GENERAL CONTRACTOR.
- ELECTRICAL CONTRACTOR, BEFORE INSTALLING ANY OF THE WORK, SHALL SEE THAT IT DOES NOT INTERFERE WITH CLEARANCES REQUIRED FOR FINISHED COLUMNS, HUNG CEILINGS, PLASTER, PARTITIONS, WALLS, ETC. AS SHOWN IN THE ARCHITECTURAL DRAWINGS AND DETAILS. IF ANY WORK IS INSTALLED AND IT LATER DEVELOPS THAT SUCH DETAILS OR DESIGN CANNOT BE FOLLOWED, THE CONTRACTOR, AT HIS OWN EXPENSE, SHALL MAKE SUCH CHANGES IN THE WORK AS DIRECTED BY THE ARCHITECT, AS WELL AS TO PERMIT THE INSTALLATION OF THE ARCHITECTURAL WORK AS SHOWN ON THE PLANS AND DETAILS.
- PERFORM TEST REQUIRED BY THE OWNER OR THE ENGINEER IN CONNECTION WITH THE OPERATION OF THE ELECTRICAL SYSTEM IN THE BUILDING.
- ALL TESTS SHALL BE MADE IN ACCORDANCE WITH THE LATEST STANDARD OF THE IEEE AND THE NATIONAL ELECTRICAL CODE.
- MINIMUM CONDUCTOR SIZE SHALL BE #12, 600V INSULATION. MINIMUM SIZE CONDUIT SHALL BE ¾" EMT FOR INTERIOR USE, AND ¾" RIGID ALUMINUM FOR EXTERIOR USE. USE TYPE NMC CABLE COPPER, FOR LIGHTS AND RECEPTACLE CIRCUITS. EXTERIOR FITTINGS SHALL BE CAST BOXES AND COVERS/. INTERIOR FITTINGS SHALL BE CAST WHERE EXPOSED ON WALLS. STAMPED BOXES MAY BE USED ABOVE CEILINGS IN AIR CONDITIONED SPACES. WHERE LAY IN FIXTURES ARE IN USE, USE 1/4" 2 ALLOWED FOR 6" WIDTH.
- CONTRACTOR SHALL INSTALL WIRING AND OTHER CIRCUIT COMPONENTS TO MATCH EQUIPMENT ACTUALLY INSTALLED.
- INSTALL GROUND FAULT RECEPTACLES AT RECEPTACLE LOCATIONS WITHIN 5' OF SINKS OR LAVATORIES, AND AT EXTERIOR LOCATIONS. EXTERIOR RECEPTACLES SHALL ALSO BE WATERPROOF.
- BONDING AND GROUNDING SHALL BE IN ACCORDANCE WITH NFPA 70:230-63, NFPA 250-23, 250-71 & 250-72.
- GROUND NEUTRAL IN ACCORDANCE WITH NFPA 70:250-23b.
- FUSES SHALL BE ITT CLASS K5, 250 VOLT, 200,000 AMP INTERRUPTING CAP.
- PROVIDE SERVICES OF A FIRE/SMOKE DETECTION AND ALARM COMPANY TO DESIGN AND INSTALL ALARM SYSTEM TO MEET REQUIREMENTS OF THE STATE FIRE MARSHALL.
- EXTERIOR LIGHTING SHALL BE SHADED OR INWARDLY DIRECTED IN SUCH A MANNER SO THAT NO DIRECT LIGHTING OR GLARE IS CAST BEYOND THE PROPERTY LINE. THE INTENSITY OF SUCH LIGHTING SHALL NOT EXCEED ONE FOOT CANDLE AS MEASURED AT THE ADJUTING PROPERTY LINE.
- ALL ELECTRICAL, MECHANICAL AND PLUMBING PENETRATING FIRE PARTITIONS SHALL BE FIRE CAULKED. (PENETRATIONS THROUGH RATED CONSTRUCTION SHALL BE SEALED WITH A MATERIAL CAPABLE OF PREVENTING THE PASSAGE OF FLAMES AND HOT GASES WHEN TESTED IN ACCORDANCE WITH ASTM-E814.)

SPECIALTY ELECTRICAL NOTES

- GENERAL CONTRACTOR TO COORDINATE A PRECONSTRUCTION SITE WALK THROUGH MEETING TO FIELD VERIFY OUTLET AND FIXTURE LOCATIONS AND TYPES WITH ARCHITECT, OWNER AND ELECTRICAL SUBCONTRACTOR PRIOR TO COMMENCING ELECTRICAL WORK AND PURCHASE OF FIXTURES.
- VERIFY POWER REQUIREMENTS OF ALL APPLIANCES WITH SELECTED APPLIANCE MANUFACTURER.
- RECESSED LIGHTING FIXTURES RECESSED INTO INSULATED CEILINGS MUST BE APPROVED FOR ZERO CLEARANCE INSULATION COVER (IC) BY UNDERWRITER LABORATORIES OR OTHER TESTING/RATING LABORATORIES RECOGNIZED BY THE INTERNATIONAL CONFERENCE OF BUILDING OFFICIALS (ICBO).
- EXHAUST FAN TO BE CAPABLE OF PROVIDING 5 FULL VOLUME AIR CHANGES PER HOUR.
- WIRING DEVICES: SWITCHES AND CONVENIENCE OUTLETS SHALL BE "LEVITON" SPEC. GRADE. COLOR: WHITE, NOT IVORY. INSTALL AT HEIGHTS REQUIRED BY CURRENT CODE, U.N.O.
- EXTENT: COMPLETE WIRING INSTALLATION FOR POWER, LIGHTING, SIGNAL SYSTEM AND TELEPHONE. CODES: ALL WIRING AND MATERIAL SHALL BE IN FULL ACCORDANCE WITH NATIONAL, STATE AND LOCAL ELECTRICAL CODES INCLUDING TITLE 24.
- OUTLET HEIGHTS INDICATED ON PLAN ARE TO CENTER OF FIXTURE AND HEIGHT ABOVE THE FINISHED FLOOR ELEVATION, VERIFY CODE COMPLIANCE WITH BUILDING INSPECTOR.
- OUTLETS AT ALL WADSWORTH DESIGN CUTTING STATIONS SHOULD BE GREY WITH BRUSHED ALUMINUM COVER PLATES
- ALL COVER PLATES AT FLOOR BOX LOCATIONS SHALL HAVE STAINLESS STEEL COVER PLATES.
- ALL OUTLETS IN STAINLESS STEEL TO BE GREY WITH STAINLESS STEEL COVER PLATES.
- ALL OUTLETS/SWITCHES IN SLATE WALLS TO BE BLACK WITH BLACK COVER PLATES.

CLECO Power LLC - Electrical Load Summary

Project Name: Hertzak Laser Center Robert Boulevard
 Project Address: Lot 2A Section 2 Township 9 South Range 14 East
 City / Town: St. Tammany Parish - Slidell, Louisiana

Intended Use: Medical Clinic
 Requested Service: 200/120 Volts 3Ø Phase 4 Wires
 Service Entrance Size: 600 Amps
 HVAC Tonnage: 26.33 Tons
 Largest Motor: N/A HP (Note: Motors above 20 hp may require reduced Voltage starting and are never recommended for use with 120/240V, 3Ø, 4W services.)

Total Building Square Footage: 7,865 Square Feet
 Individual Unit Square Footage: N/A Square Feet (Multiple Occupancy)
 Individual Unit Designation: N/A (Multiple Occupancy)

LOAD SOURCE	1Ø - kVA	3Ø - kVA	1Ø - kW	3Ø - kW
Building Lighting	15,373	-	-	-
Electric Water Heating	14,560	-	-	-
Heat Pumps - D5 Ductless Units	22,464	-	-	-
Supplemental Heat System	-	-	-	-
Air Conditioning	22,672	-	-	-
Electrical Heating (Primary) - AHUs	89,232	-	-	-
Cooking	-	-	-	-
Refrigeration	-	-	-	-
Receptacles (Standard)	22,880	-	-	-
Receptacles (Computer)	30,600	-	-	-
Total Motors (Exclude HVAC)	-	-	-	-
Parking Lot 7 Exterior Lighting	1,400	-	-	-
Miscellaneous - Junction Boxes	7,100	-	-	-
Other (Specify) - Autoclave & Dishwasher	3,600	-	-	-

ELECTRICAL LIGHTING FIXTURE SCHEDULE

1. ALL FIXTURES AND LAMPS SHALL BE SPECIFIED. SUBSTITUTES NOT ALLOWED. LEAD TIME ON LIGHTING FIXTURES IS UP TO 8 WEEKS AFTER RELEASE OF ORDER. PRE-APPROVED LIGHTING SUBMITTALS AVAILABLE ON LINE AFTER AWARD OF CONTRACT. DOWNLIGHTS WILL BE FURNISHED WITH HANGER BARS SHIPPED SEPERATELY. ALL TRACK SHALL BE MOUNTED TO STRUT FURNISHED BY THE CONTRACTOR.

2. LIGHT FIXTURES AND LAMPS ARE FURNISHED BY THE NATIONAL ACCOUNT VENDOR. PURCHASED BY THE CONTRACTOR, VERIFY W/ OWNER. ALL QUANTITIES OF FIXTURES ON QUOTATIONS ARE GUARENTEED.

CONTACT INFORMATION AS FOLLOWS:
 WIEDENBACH-BROWN
 YORBA LINDA, CA
 (714) 692-2200


N.A. EXEC: RON DOYLE X322
 ron.doyle@wblight.com
 N. AN OM: CAROL BROWN X324
 carol.brown@wblight.com

REVIEWED FOR STATE FIRE MARSHALL AS PER REQUIREMENTS BY OIE

ELECTRICAL LIGHTING FIXTURE SCHEDULE

SYMBOL	REF.	HEIGHT	FIXTURE HEIGHT	MANUFACTURER	ORDER NUMBER	LAMPS	NOTES
A	A	12'-0"	MH CAST CLOSED BACK GIMBAL TRACK FIXTURE - FURNISH WITH BLACK TRACK AND END-FEED CURRENT LIMITER.	CON-TECH LIGHTING	# CTLB235539MHG-B FIXTURE # LT8-X-B TRACK # LA-23-R-B-REGX	GE #CMH139 TUJ830/G12 (20153)	ONE HEAD PER CHAIR IN CLINIC AREAS, PROVIDE CURRENT-LIMITERS AS INDICATED ON ELECTRICAL PLANS. MOUNT TO UNI-STRUT WITH THREAD ROD.
A1	A1	12'-0"	HALOGEN PAR 38 BLACK TRACK FIXTURE FURNISH WITH BLACK TRACK.	COOPER - HALO	# L1807-PAL #L1980MB # LG53-MB TRACK	GE #100 PAR38/HIR/ SP-10-120V	6 TO 8 LIGHTS PER 12'-0" SECTION OF TRACK. VERIFY REQUIRED CONNECTING WITH MANUF. MOUNT TO UNI-STRUT WITH THREAD ROD. PROVIDE DIMMER SWITCH.
B	B	CEILING	7" COMPACT FLUOR HORIZONTAL DOWNLIGHT HAZE FINISH AND WHITE TRIM	COOPER - PORTFOLIO	# C7242E-7350H		
B1	B1	CEILING	7" COMPACT FLUOR HORIZONTAL DOWNLIGHT HAZE FINISH AND WHITE TRIM	COOPER - PORTFOLIO			
C	C	CEILING	3" LOW VOLTAGE ADJUSTABLE DOWNLIGHT CLEAR FINISH AND WHITE TRIM	COOPER - HALO			PROVIDE DIMMER SWITCH
D	D	CEILING	2X4 (2) LAMP RECESSED INDIRECT FLUORESCENT TROFFER	CORELITE - CLASS R2			
D1F	D1F	CEILING	2X4 (2) LAMP RECESSED INDIRECT FLUORESCENT TROFFER WITH FLANGE KIT	CORELITE - CLASS R2			
D6	D6	CEILING	2X4 (3) LAMP RECESSED INDIRECT FLUORESCENT TROFFER	CORELITE - CLASS R2			
D6F	D6F	CEILING	2X4 (3) LAMP RECESSED INDIRECT FLUORESCENT TROFFER WITH FLANGE KIT	CORELITE - CLASS R2			
E	E	CEILING	1X4 WRAP SURFACE MOUNT WITH ACRYLIC LENSE FLUORESCENT	METALUX - W SERIES			
G	G	8'-3" - 9'-0"	LINEAR FLUORESCENT PENDANT MOUNTED UPLIGHT	FOCAL POINT - EVOLUTION 1			T-BAR, HARD-LID, OR DROP CEILING CONDITION. VERIFY CABLE SUSPENSION LENGTH "CXX".
H	H	7'-0"	VAPOR-TITE INCANDESCENT WALL/CEILING FIXTURE	COOPER - LUMARK			CEILING MOUNT FIXTURE TO BE MOUNTED ON WALL IN RESTROOMS. RECESS J-BOX.
H2	H2	WALL	WALL MOUNT LINEAR FLUORESCENT	LIGHTOLIER "BRISA" CURVE			WALL MOUNTED FIXTURE AT MAKE-UP BAR
J3	J3	CEILING	12" METAL HALIDE HIGH-BAY WITH ELECTRONIC BALLAST	SPECTRUM - LUMEN MAX EXT OF SERIES			
K1	K1	7'-0" - 8'-0"	7.5" INCANDESCENT DECORATIVE PENDANT	PRISMA - OPTALUM			FOR USE AT RECEPTION AND CONFERENCE ROOM, PROVIDE DIMMER SWITCH IN CONF. ROOM ONLY. VERIFY FIXTURE WITH OWNER.
E1	E1	CEILING	EXISTING 2X4 FIXTURE TO BE RELOCATED AND REUSED				CLEAN AND RELAM FIXTURE.
E2	E2	CEILING	EXISTING 2X2 FIXTURE TO BE RELOCATED AND REUSED				CLEAN AND RELAM FIXTURE.

EMERGENCY LIGHTS (SEE ELECTRICAL DRAWINGS)

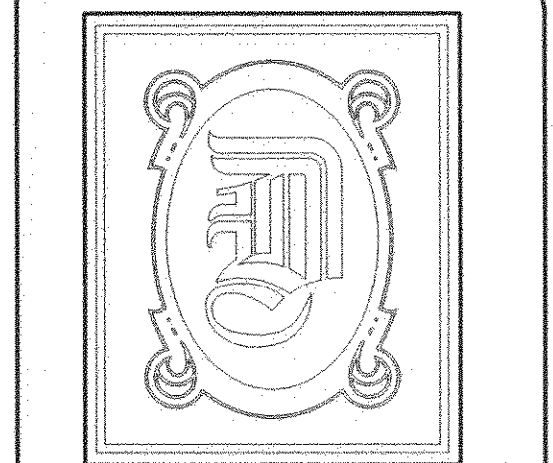

DAMMON ENGINEERING, INC.

CHIEF ENGINEER
EMMETT DAMMON, P.E.

CHIEF ARCHITECT
ROBERT WILTSE

1095 FLORIDA AVENUE
SLIDELL, LA. 70458
OFFICE: 985-649-5832
FAX: 985-641-5950


WEBSITE:
WWW.DAMMONENGINEERING.COM

EMAIL:
DAMMONENG@BELLSOUTH.NET

- ARCHITECTURE
- ENGINEERING
- STUDIES
- PLANNING
- INVESTIGATION
- EXPERT WITNESS

PAUL MITCHELL
SCHOOL
3321 HESSMER AVE
METAIRIE, LA
70002

ELECTRICAL
NOTES

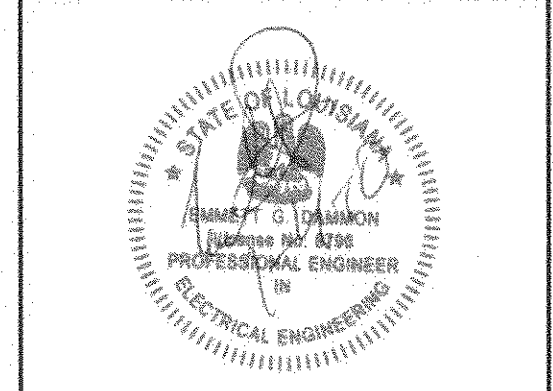

REV:

SCALE: AS NOTED

JOB#: 2051

DATE: 01-04-10

SHEET

E-8

OF