

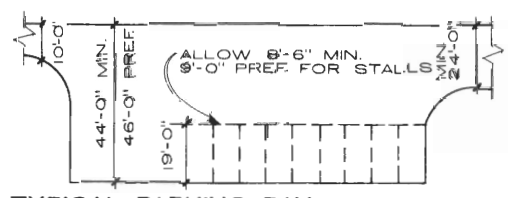


RECOMMENDED STALL AND AISLE DIMENSIONS




ANGLE X	B	C	D	E	F	G	H	UNIT DEPTH	
								I	II
30°	8.5	16.9	11.0	26.4	17.0	12.7	29.2	44.9	37.5
	9.0	17.3	11.0	26.8	18.0	13.5	30.0	45.6	37.8
45°	8.5	19.4	13.5	32.9	12.0	6.0	19.4	52.3	46.3
	9.0	19.8	13.0	33.3	12.7	6.3	19.7	52.6	46.2
60°	8.5	20.7	18.5	37.3	9.8	2.4	11.9	59.9	55.8
	9.0	21.0	18.0	37.5	10.4	2.6	12.1	60.0	55.5
70°	8.5	20.8	19.5	38.7	9.0	1.0	7.5	61.1	58.2
	9.0	21.0	19.0	38.9	9.6	1.1	7.6	61.0	57.9
80°	8.5	20.2	24.0	39.0	8.6	0.2	3.5	64.4	62.9
	9.0	20.3	24.0	39.0	9.1	0.2	3.5	64.6	63.0
90°	8.5	19.0	27.0	38.0	8.5	0.0	0.0	65.0	65.0
	9.0	19.0	25.0	38.0	9.0	0.0	0.0	63.0	63.0

NOTE: Even number of spaces, "N" in length of curb,

$$"L" = N = \frac{L - H + G}{F}$$
 Stall length = 19'-0"

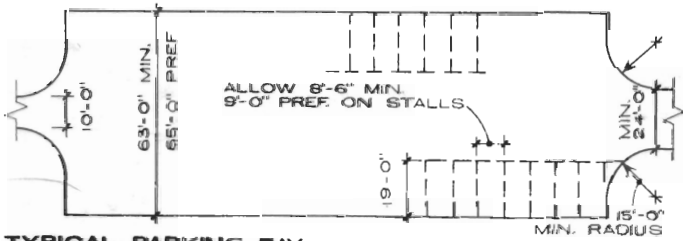

NOTE: Provide extra width for walks along side parking bay to compensate for bumper overhang.

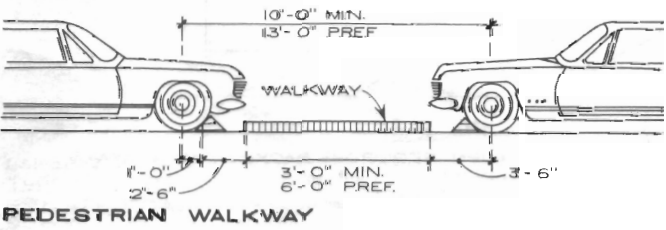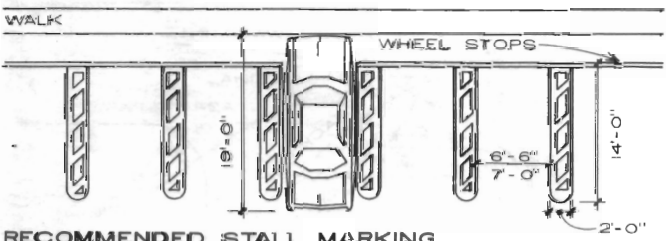

NOTE: Begin to taper to 9'-0" to 10'-0" for approach to ticket dispenser.

