FILE PATH: J:\1 - Drawings\13213 - Camp Villere, Connector & Apts\Drawings\Current Drawings\S3.dwg - PLOT DATE & TIME: Sunday, September 20, 2015 10:43:29 AM

UPLIFT CONNECTIONS-130MPH WINDS EXPOSURE "C"

CONNECTION	FRAMING SPACING (in.)	ROOF SPAN (ft.)	U	L	S	NUM. OF 8d COM. NAILS OR 10d BOX NAILS IN EA. END OF 1-1/4"X20 GA. STRAP
ROOF ASSEMBLY TO WALL ASSEMBLY	16" O.C.	17	386	246	109R	4
WALL ASSEMBLY TO WALL ASSEMBLY	16" O.C.	17	386	246	109R	4
WALL ASSEMBLY TO FOUNDATION	16" O.C.	17	170	185	436	4

THERMAL COMPONENT CRITERIA (U-FACTOR AND R-VALUE)

MAX. GLAZING U-FACTOR	MINIMUM INSULATION R-VALUE				
	CEILINGS	WALLS	FLOORS	BASEMENT WALLS	CRAWL SPACE WALLS
.75	R-26	R-13	R-11	R-5	R-5

WINDBORNE DEBRIS PROTECTION FASTENING SCHEDULE FOR WOOD STRUCTURAL PANELS

FASTENER TYPE	FASTENER SPACING		
	PANEL SPAN ≤ 4 FOOT	4 FOOT PANEL SPAN ≤ 6 FOOT	6 FOOT PANEL SPAN ≤ 8 FOOT
2-1/2" #6 WOOD SCREWS	16"	12"	9"
2-1/2" #8 WOOD SCREWS	16"	16"	12"

WINDOWS IN BUILDINGS LOCATED IN WIND BORNE DEBRIS REGIONS SHALL HAVE GLAZED OPENINGS PROTECTED FROM WINDBORNE DEBRIS. WOOD STRUCTURAL PANELS WITH A MIN. THICKNESS OF 7/16" AND A MAX. SPAN OF 8 FEET SHALL BE PERMITTED FOR OPENING PROTECTION IN ONE AND TWO STORY BUILDINGS. PANELS SHALL BE PRECUT TO COVER THE GLAZED OPENINGS WITH ATTACHMENT HARDWARE PROVIDED.

WALL SHEATH OR CLAD REQ FOR WIND LOAD-EXPOSURE "C"

SHEATHING LOCATION	STUD SPACING	E	F
		MAX NAIL SPACING FOR 8d COMMON NAILS OR 10d BOX NAILS (INCHES, O.C.)	
INTERIOR ZONE	12" O.C.	6	12
	16" O.C.	6	12
	24" O.C.	6	12
PERIMETER EDGE ZONE	12" O.C.	6	12
	16" O.C.	6	12
	24" O.C.	6	12
130 MPH WINDS-EXPOSURE "C" (TYP.)			

HEADER NAILING SCHEDULE

DESCRIPTION	NUM. OF COM. NAILS	NUM. OF BOX NAILS	SPACING
HEAD. TO HEAD. (FACE-NAILED)	8d	10d	6" O.C. EDGES/ 12" O.C. FIELD

NOTE: ALL HEADERS SHALL HAVE SOLID BLOCKING

ROOF UNDERLAYMENT APPLICATION

-FOR ROOF SLOPES FROM TWO UNITS VERTICAL IN 12 UNITS HORIZONTAL (17-PERCENT SLOPE), UP TO FOUR UNITS VERTICAL IN 12 UNITS HORIZ. (33-PERCENT SLOPE), UNDERLAYMENT SHALL BE TWO LAYERS APPLIED IN THE FOLLOWING MANNER:

-APPLY A 19 INCH STRIP OF UNDERLAYMENT FELT PARALLEL WITH AND STARTING AT THE EAVES, FASTENED SUFFICIENTLY TO HOLD IN PLACE. STARTING AT THE EAVE, APPLY 36 INCH WIDE SHEETS OF UNDERLAYMENT, OVERLAPPING SUCCESSIVE SHEETS 19 INCHES, AND FASTENED SUFFICIENTLY TO HOLD IN PLACE.

-FOR ROOF SLOPES OF FOUR UNITS VERTICAL IN 12 UNITS HORIZONTAL (33-PERCENT SLOPE) OR GREATER, UNDERLAYMENT SHALL BE ONE LAYER APPLIED IN THE FOLLOW- ING MANNER:

-UNDERLAYMENT SHALL BE APPLIED SHINGLE FASHION, PARALLEL TO AND STARTING FROM THE EAVE AND LAPPED 2 INCHES, FASTENED SUFFICIENTLY TO HOLD IN PLACE. END LAPS SHALL BE OFFSET BY 6 FEET.

SHINGLE APPLICATION/FASTENING

ASPHALT STRIP SHINGLES SHALL HAVE A MINIMUM OF SIX FASTENERS PER SHINGLE WHERE THE ROOF IS IN ONE OF THE FOLLOWING CATEGORIES:
1. THE BASIC WIND SPEED IS 110 MPH OR GREATER AND THE EAVE IS 20 FEET OR HIGHER ABOVE GRADE.
2. THE BASIC WIND SPEED IS 120 MPH OR GREATER.
3. SPECIAL WIND ZONES.

UPLIFT CONNECTIONS

ROOF ASSEMBLY TO WALL ASSEMBLY:
UPLIFT CONNECTIONS SHALL BE FROM RAFTER OR TRUSS TO WALL STUD. WHEN RAFTERS OR TRUSSES ARE NOT LOCATED DIRECTLY ABOVE STUDS, RAFTERS SHALL BE ATTACHED TO THE WALL PLATE AND THE WALL TOP PLATE SHALL BE ATTACHED TO THE WALL STUD WITH UPLIFT CONNECTIONS. UPLIFT CONNECTIONS SHALL BE IN ACCORDANCE WITH TABLE.

WALL ASSEMBLY TO WALL ASSEMBLY:
STORY TO STORY UPLIFT CONNECTIONS FROM UPPER STORY WALL STUD TO LOWER STORY WALL STUD. WHEN UPPER STORY WALL STUDS ARE NOT LOCATED DIRECTLY ABOVE LOWER WALL STUDS, THE STUDS SHALL BE ATTACHED TO A COMMON MEMBER IN THE FLOOR ASSEMBLY BY UPLIFT CONNECTIONS. UPLIFT CONNECTIONS SHALL BE IN ACCORDANCE WITH TABLE.

WALL ASSEMBLY TO FOUNDATION:
FIRST FLOOR WALL STUDS SHALL BE CONNECTED TO THE FOUNDATION, SILL, PLATE, OR BOTTOM PLATE. A MINIMUM OF A 1-1/4" x 20 GA. ASTM A653 GRADE 33 STEEL STRAP SHALL BE NAILED TO THE WALL STUDS AND HAVE A MINIMUM EMBEDMENT OF 7 INCHES IN CONCRETE FOUNDATIONS AND SLABS-ON-GRADE, 15 INCHES IN MASONRY BLOCK FOUNDATIONS, OR BE LAPPED UNDER THE BOTTOM PLATE. 3 INCH SQUARE WASHERS SHALL BE USED ON THE ANCHOR BOLTS AND ANCHOR BOLT SPACINGS SHALL NOT EXCEED THE REQUIREMENTS. STEEL STRAPS EMBEDDED IN OR IN CONTACT WITH SLAB-ON-GRADE OR MASONRY BLOCK FOUNDATIONS SHALL BE HOT-DIPPED GALV. AFTER FABRICATION, OR MANUF. FROM G185 OR Z450 GALV. STL. CONNECTIONS SHALL BE IN ACCORDANCE WITH TABLE.

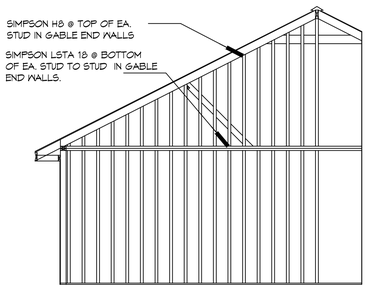

END WALLSTRAPPING
SCALE: NTS

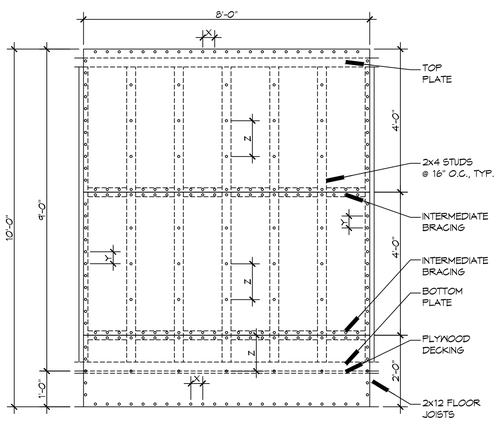

DETAIL
SCALE: NTS TYP. EXTERIOR SHEATHING NAILING PATTERN

JACK STUD REQUIREMENTS- INT LOADBEARING WALLS

HEADER SUPPORTING	HEADER SPAN (ft.)	ROOF SPAN (ft.)											
		12 FEET				24 FEET				36 FEET			
		3"	4.5"	5"	6.5"	3"	4.5"	5"	6.5"	3"	4.5"	5"	6.5"
		NUMBER OF JACK STUDS REQUIRED											
ROOF AND CEILING	2	1	1	1	1	1	1	1	1	1	1	1	1
	4	1	1	1	1	1	1	1	1	1	1	1	1
	6	1	1	1	1	1	1	1	1	2	1	1	1
	8	1	1	1	1	2	1	1	1	2	2	2	1
	10	1	1	1	1	2	2	1	1	3	2	2	2
	12	1	1	1	1	2	2	2	1	3	2	2	2
	14	2	1	1	1	3	2	2	2	4	3	3	2
	16	2	1	1	1	3	2	2	2	4	3	3	2
ROOF, CEILING, AND 1 CENTER BEARING FLR.	2	1	1	1	1	1	1	1	1	2	1	1	1
	4	1	1	1	1	2	1	1	1	3	2	2	2
	6	2	1	1	1	3	2	2	2	4	3	3	2
	8	2	2	1	1	3	2	2	2	5	3	3	3
	10	2	2	2	1	4	3	3	2	6	4	4	3
	12	3	2	2	2	5	3	3	3	7	5	4	4
	14	3	2	2	2	5	4	3	3	8	5	5	4
	16	4	3	2	2	6	4	4	3	9	6	5	5
HEADER WIDTH-3" (2-2x), 4.5" (3-2x), 5", 6.5" (4-2x) EACH W/ 1/2" PLYWD. SPACER BETWEEN													

SILL OR BOTTOM PLATE TO FND CONNECTIONS RESISTING UPLIFT LOADS - 130MPH WINDS EXP "B"

BOTTOM PLATE TO FND. ANCHOR BOLT CONNECTION RESISTING	FOUNDATION SUPPORTING	MAX. ANCHOR BOLT SPACING (in.)	
		8' END ZONES	INTERIOR ZONES
UPLIFT LOADS	1-3 STORIES	28	33

SILL OR BOTTOM PLATE TO FND CONNECTIONS RESISTING SHEAR LOADS-130MPH WINDS EXP "B"

BOTTOM PLATE TO FND. ANCHOR BOLT CONNECTION RESISTING	FOUNDATION SUPPORTING	MAX. ANCHOR BOLT SPACING (in.)	
		1/2" ANC. BOLTS	5/8" ANC. BOLTS
SHEAR LOADS	1-3 STORIES	30	45

HEADER SPANS - INTERIOR LOADBEARING WALLS

HEADER SUPPORTING	SIZE	BLDG. WIDTH (ft.)		
		12	24	36
		SPANS (ft.-in.)		
ONE FLOOR (CENTER BEARING)	(2)2x4'S	4'-4"	3'-1"	2'-6"
	(2)2x6'S	6'-5"	4'-6"	3'-8"
	(2)2x8'S	8'-1"	5'-9"	4'-8"
	(2)2x10'S	9'-11"	7'-0"	5'-9"
	(2)2x12'S	11'-6"	8'-1"	6'-7"
	(3)2x8'S	10'-2"	7'-2"	5'-10"
	(3)2x10'S	12'-5"	8'-9"	7'-2"
	(3)2x12'S	14'-4"	10'-2"	8'-3"
	(4)2x8'S	11'-6"	8'-3"	6'-9"
	(4)2x10'S	14'-4"	10'-1"	8'-3"
	(4)2x12'S	*	11'-4"	9'-7"
2 FLOORS ONLY (CENTER BEARING)	(2)2x4'S	2'-10"	2'-1"	1'-8"
	(2)2x6'S	4'-2"	3'-1"	2'-6"
	(2)2x8'S	5'-4"	3'-11"	3'-3"
	(2)2x10'S	6'-6"	4'-4"	3'-11"
	(2)2x12'S	7'-6"	5'-6"	4'-7"
	(3)2x8'S	6'-8"	4'-10"	4'-0"
	(3)2x10'S	8'-1"	6'-0"	4'-11"
	(3)2x12'S	9'-5"	6'-11"	5'-9"
	(4)2x8'S	7'-8"	5'-8"	4'-8"
	(4)2x10'S	9'-4"	6'-10"	5'-8"
	(4)2x12'S	10'-10"	8'-0"	6'-7"
* MAX. SPAN EXCEEDS 16' (SPANS LIM. TO 16')				

NOTE:
ALL HEADERS SHALL HAVE SOLID BLOCKING

ROOF SHEATH OR CLAD REQ - WIND LOAD EXP "C"

SHEATHING LOCATION	RAFTER/ TRUSS SPAC.	E	F
		MAX. NAIL SPAC. FOR 8d COM. NAILS OR 10d BOX NAILS (INCHES, O.C.)	
INTERIOR ZONE	12" O.C.	6	12
	16" O.C.	6	12
	24" O.C.	6	12
PERIMETER EDGE ZONE	12" O.C.	6	12
	16" O.C.	6	8
	24" O.C.	6	6
130 MPH WINDS-EXPOSURE "C" (TYP.)			

HEADER SPANS-EXPOSURE C FOR EXTERIOR LOADBEARING WALLS

HEADER SIZE	SPAN	NUMBER FULL HEIGHT STUDS REQ AT EA END
(2)2x4'S	4'-7"	2
(2)2x6'S	5'-6"	2
(2)2x8'S	6'-1"	3
(2)2x10'S	6'-8"	3
(2)2x12'S	7'-1"	3
(3)2x8'S	7'-5"	3
(3)2x10'S	8'-3"	3
(3)2x12'S	8'-8"	3
(4)2x8'S	8'-1"	3
(4)2x10'S	9'-6"	3
(4)2x12'S	10'-0"	4
130 MPH WINDS-EXPOSURE "C" (TYP.) EACH W/ 1/2" PLYND. SPACER BETWEEN		

NOTE:
1. BLDG. WIDTH IS MEASURED PERPENDICULAR TO THE RIDGE. FOR WIDTHS BETWEEN THOSE SHOWN, SPANS ARE PERMITTED TO BE INTERPOLATED.
2. ALL HEADERS SHALL HAVE SOLID BLOCKING.

JACK STUD REQ - EXP "C" FOR EXT LOADBEARING WALLS

HEADER SUPPORTING	HEADER SPAN (ft.)	HEADER WIDTH			
		3"	4.5"	5"	6.5"
		NO. JACK STUDS REQ.			
ROOF AND CEILING	2	1	1	1	1
	4	1	1	1	1
	6	2	1	2	2
	8	2	2	2	2
	10	3	2	2	2
	12	3	2	2	2
	14	4	3	2	2
	16	4	3	3	2
ROOF, CEILING, AND 1 CENTER BEARING FLOOR	2	1	1	1	1
	4	2	1	1	1
	6	2	2	2	1
	8	3	2	2	3
	10	4	3	2	2
	12	4	3	3	2
	14	5	3	3	3
	16	5	4	3	3
HEADER WIDTH-3" (2-2x), 4.5" (3-2x), 5", 6.5" (4-2x) EACH W/ 1/2" PLYWD. SPACER BETWEEN					

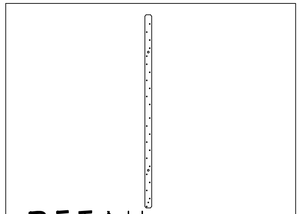

DETAIL
SCALE: NTS SIMPSON MSTAM36



SIMPSON STRONG-TIE LSTA18
AT ALL RIDGE CONNECTIONS

DETAIL
SCALE: NTS RAFTER TO RIDGE



SIMPSON STRONG-TIE #LTS16

DETAIL
SCALE: NTS TOP PLATE TO RAFTER



SIMPSON STRONG-TIE #SP2

DETAIL
SCALE: NTS STUD TO TOP PLATE



SIMPSON STRONG-TIE HU212 JOIST HANGER

DETAIL
SCALE: NTS FLOOR JOIST



SIMPSON STRONG-TIE HUS212-2 JOIST HANGER

DETAIL
SCALE: NTS FLOOR JOIST



SIMPSON STRONG-TIE #HCP2

DETAIL
SCALE: NTS HIP CORNER PLATE



SIMPSON STRONG-TIE #SP1

DETAIL
SCALE: NTS STUD TO SOLE PLATE

NAIL SPACING

X = 4" O.C.
Y = 4" O.C.
Z = 12" O.C.

X = PLATE EDGE NAIL SPACING
Y = LONG EDGE NAIL SPACING
Z = FIELD NAIL SPACING

DESIGN CRITERIA:

THE CONSTRUCTION FOR SAID RESIDENCE, WHERE BASIC WIND SPEED IS 130 MILES PER HOUR, WIND EXPOSURE ZONE C, IS DESIGNED IN ACCORDANCE WITH: AMERICAN FOREST AND PAPER ASSOCIATION (AF&PA) WOOD FRAME CONSTRUCTION MANUAL FOR ONE AND TWO FAMILY DWELLINGS (WFCM) 2001 EDITION AS WELL AS THE INTERNATIONAL RESIDENTIAL CODE (IRC) 2012 EDITION

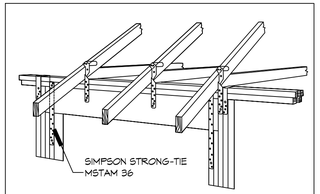

SIMPSON STRONG-TIE MSTAM 36

DETAIL
SCALE: NTS HEADER TO TOP PLATE



LCE4Z INSTALLATION (MITERED CORNER)

DETAIL
SCALE: NTS POST TO BEAM

DAMMON ENGINEERING, INC.
LOUISIANA & MISSISSIPPI
www.dammonengineering.com
info@dammonengineering.com
PH: 985.649.5832
Chief Engineer: Brian Mistich, PE
554 Old Spanish Trail
Slidell, LA 70458

REVISIONS

#	DESCRIPTION	DATE

SEAL:

95% SUBMITTAL NOT FOR CONSTRUCTION

LOUISIANA ARMY NATIONAL GUARD
CAMP VILLERE NEW HOME CONSTRUCTION
LA 14-A-057
CAMP VILLERE, LOUISIANA

These plans and specifications, copyright (c) 2014 by Dammon Engineering, Inc., are and shall remain the property of Dammon Engineering, and are not to be used in whole or part on any other project without the written permission of Dammon Engineering. Visual contact with these plans and specifications shall constitute prima facie evidence of the acceptance of these restrictions.

JOB No:	2210	DATE:	OCTOBER 8, 2014
DRAWN BY:	DD/KJK	CHECKED BY:	CKD

SHEET TITLE:
STRAPPING AND CONNECTION DETAILS

DRAWING NUMBER:
S3

SHEET No: 4 of 12