

Beam Clamps, Straps, Clamps and Clamp Backs for Rigid Metal Conduit or IMC

Applications

- Beam clamp: provides support for conduit hanging systems.
- Two-Hole Straps: used to support rigid metal conduit and IMC.
- Clamp Backs: provide spacing from mounting surface when used with pipe clamps.

Certifications and Compliances

- CSA Standard: C22.2 No. 18.4
- CSA Certified: 065178

Options

- PVC coating available on select clamps. Add suffix -PVC to catalog number.



Material/Finish

- Beam clamps: malleable iron/hot dip galvanized
- Straps: steel/zinc electroplate

Catalog Number	Dimensions in Inches/Millimeters					Weight Lbs./Kgs. Per 100
	A	B	C	D	E	

Beam Clamps — Malleable Iron — Hot Dipped Galvanized

BH-500 †	1.63/41.4	1.00/25.4	0.88/22.4	0.94/23.9	0.25/6.4 – 20.00/508.0	22.00/ 9.98
BH-500-10	1.63/41.4	1.00/25.4	0.88/22.4	0.94/23.9	10.00/254.0 – 24.00/609.6	21.5/ 9.75
BH-501 †	1.81/46.0	1.50/38.1	1.13/28.7	0.94/23.9	0.31/7.9 – 18.00/457.2	45.00/ 20.41
BH-502 †	2.06/52.3	2.00/50.8	1.38/35.1	1.00/25.4	0.38/9.7 – 16.00/406.4	83.00/ 37.65
BH-503 †	2.25/57.2	2.63/66.8	1.69/42.9	1.13/28.7	0.50/12.7 – 13.00/330.2	152.00/ 68.95

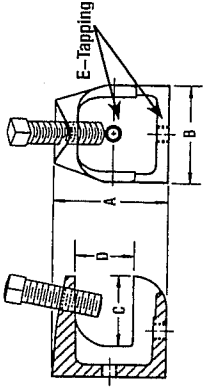


COMMERCIAL PRODUCTS: RIGID, IMC AND EMT CLAMPS AND HANGERS

Catalog Number	Trade Size (Inches)	Dimensions in Inches/Millimeters			Hole Diameter	Weight Lbs./Kgs. Per 100
		A	B	C		

2-Hole Straps — Steel/Zinc Electroplate

CF-250	1/4	1.25/31.8	0.63/16.0	0.63/16.0	0.19/4.8	1.60/0.73
CF-375	3/8	1.50/38.1	0.63/16.0	0.75/19.1	0.19/4.8	1.20/0.54
CF-500	1/2	1.59/40.4	0.63/16.0	0.91/23.1	0.19/4.8	1.40/0.64
CF-750	3/4	2.09/53.1	0.63/16.0	1.06/26.9	0.19/4.8	1.60/0.73
CF-100	1	2.44/62.0	0.75/19.1	1.38/35.1	0.19/4.8	3.50/1.59
CF-125	1-1/4	2.66/67.6	0.75/19.1	1.75/44.5	0.25/6.3	4.00/1.81
CF-150	1-1/2	3.59/91.2	1.00/25.4	2.00/50.8	0.25/6.3	9.00/4.08
CF-200	2	4.06/103.1	1.25/31.8	2.50/63.5	0.25/6.3	12.00/5.44
CF-250H	2-1/2	4.38/111.3	1.00/25.4	2.81/71.4	0.27/6.9	5.70/2.59
CF-300H	3	5.00/127.0	1.00/25.4	3.38/85.9	0.27/6.9	8.00/3.63
CF-350H	3-1/2	6.25/158.8	1.00/25.4	3.88/98.6	0.33/8.4	8.70/3.95
CF-400H	4	7.00/177.8	1.25/31.8	4.38/111.3	0.28/7.1	9.40/4.26



† PVC coating available on select clamps. Add suffix -PVC to catalog number.

Rigid Metal Conduit, IMC or EMT "K-Clamps"

Applications

- Designed to secure rigid metal conduit, IMC or EMT across, parallel or perpendicular to beam, channel and angle supports.

Features

- Easily installs.
- Capable of withstanding heavy loads.

Material/Finish

- Castings: malleable iron/hot dip galvanized
- Hardware: steel/mechanically galvanized


Certifications and Compliances

- CSA Standard: C22.2 No. 18.4
- CSA Certified: 065178

Catalog Number	Trade Size (Inches)	Weight Lbs./Kgs. Per 100
----------------	---------------------	--------------------------

Right Angle Type — Hot Dip/Mechanically Galvanized — For Rigid, IMC, EMT


PC-50RA	1/2	37.00/16.78
PC-75RA	3/4	40.00/18.14
PC-100RA	1	42.00/19.05
PC-125RA	1-1/4	49.00/22.23
PC-150RA	1-1/2	54.00/24.49
PC-200RA	2	71.00/32.21
PC-250RA	2-1/2	95.00/43.09
PC-300RA	3	107.00/48.53
PC-350RA	3-1/2	120.00/54.43
PC-400RA	4	131.00/59.42
PC-500RA †	5	160.00/72.57
PC-600RA †	6	195.00/88.45



Right Angle Type

Parallel Type — Hot Dip/Mechanically Galvanized — For Rigid, IMC, EMT


PC-50PAR	1/2	50.00/22.68
PC-75PAR	3/4	53.00/24.04
PC-100PAR	1	60.00/27.22
PC-125PAR	1-1/4	70.00/31.75
PC-150PAR	1-1/2	82.00/37.19
PC-200PAR	2	132.00/59.87
PC-250PAR	2-1/2	192.00/87.09
PC-300PAR	3	194.00/88.00
PC-350PAR	3-1/2	216.00/97.98
PC-400PAR	4	232.00/105.23



Parallel Type

Edge Type — Hot Dip/Mechanically Galvanized — For Rigid Conduit Only

PC-50ET	1/2	63.00/28.58
PC-75ET	3/4	69.00/31.30
PC-100ET	1	82.00/37.19
PC-125ET	1-1/4	95.00/43.09
PC-150ET	1-1/2	108.00/49.00
PC-200ET	2	121.00/54.88
PC-250ET	2-1/2	153.00/69.40
PC-300ET	3	214.00/97.07



Edge Type

† Not CSA Certified.