

LIFE-SAFETY INFORMATION	
<b>APPLICABLE CODES</b>	
NFPA 101 LIFE-SAFETY CODE 2012	
OCCUPANCY TYPE(S) AND CHAPTER(S)	
STORAGE (CHAPTER 42), BUSINESS (CHAPTER 38)	
MULTIPLE, MIXED, OR SEPARATE OCCUPANCY (REFERENCE CHAPTER 6)	
N/A	
<b>OCCUPANT LOAD FACTOR</b> (REFERENCE TABLE 7.3.1.2)	
12,804 SF / 100 SF PER OCCUPANT =	128 OCCUPANTS
4,630 SF / 300 SF PER OCCUPANT	15 OCCUPANTS
<b>CLASSIFICATION OF HAZARD OF CONTENTS</b>	
(REFERENCE: OCCUPANCY CHAPTER AND 6.2.2. SPECIFY LOW, ORDINARY, OR HIGH)	
CONSTRUCTION TYPE(S) (REFERENCE: CHAPTERS, TABLE A.5.2.1.2 AND COMMENTARY TABLE B.1 IN HANDBOOK)	
III(200)	
<b>MINIMUM EXIT SEPARATION DISTANCE FOR REMOTELY LOCATED EXITS</b>	
(REFERENCE: SECTION 7.5; SPECIFY 1/2 OR 1/3 DIAGONAL DISTANCE OF AREA SERVED)	
1/2 DIAGONAL =	N/A
<b>MAXIMUM DEAD-END CORRIDORS</b> (REFERENCE: OCCUPANCY CHAPTER AND TABLE A.7.6)	
20'	
<b>MAXIMUM COMMON PATH OF TRAVEL DISTANCE</b> (REFERENCE: OCCUPANCY CHAPTER AND TABLE A.7.6)	
75'	
<b>MAXIMUM TRAVEL DISTANCE TO EXITS</b> (REFERENCE: OCCUPANCY CHAPTER AND TABLE A.7.6)	
200'	
*MAIN ENTRANCE MUST BE SIGNED TO ACCOMMODATE 1/2 OCCUPANT LOAD OF BUILDING	
<b>EXTINGUISHMENT REQUIREMENTS</b> SPRINKLER NOT REQUIRED	
<b>DETECTION, ALARM, AND COMMUNICATION SYSTEMS</b> NO	
<b>ALLOWABLE HEIGHT AND BUILDING AREA</b> PER IBC EQUIVALENT CONSTRUCTION TYPE	



BUILDING CODE INFORMATION	
<b>APPLICABLE CODES</b>	
IBC 2012	
<b>BUSINESS GROUP B</b> (IBC 2012 CHAPTER 13)	
<b>ORDINARY-HAZARD STORAGE S-2</b>	
<b>OCCUPANT LOAD CALCULATIONS</b> (TABLE 1004.1.1)	
BUSINESS =	12,804 SQ FT 100 SF PER OCCUPANT (GROSS) 128 OCCUPANTS
ACCESSORY STORAGE =	4,630 SQ FT 300 SF PER OCCUPANT (GROSS) 15 OCCUPANTS
<b>CONSTRUCTION TYPE(S)</b> (TABLE 503)	
III(B) (SECTION 503)	
<b>ALLOWABLE HEIGHT AND BUILDING AREA LIMITED BY TYPE OF CONSTRUCTION</b>	
MAXIMUM HEIGHT IN STORIES (SECTION 503 & 504, TABLE 503)	2
MAXIMUM AREA IN SQUARE FEET (SECTION 503, 506 & 507, TABLE 503)	19,500

WIND SPEED DESIGN REQUIREMENTS	
THIS BUILDING SHALL BE DESIGNED WITH IBC SEC 1609 AS A FULLY ENCLOSED BLDG USING THE FOLLOWING INFORMATION:	
<b>WIND DESIGN DATA:</b>	
DETERMINATION OF WIND LOADS SHALL BE IN ACCORDANCE WITH IBC SEC 1609.3 (A), (B), OR (C) DEPENDING ON THE RISK CATEGORY	
WIND SPEED Vult (3 SECOND GUST) =	143 MPH (IBC FIG 1609A)
NOMINAL DESIGN WIND SPEED V <sub>std</sub> =	111 MPH ( Vult x (0.6) <sup>1/2</sup> )
RISK CATEGORY:	CATEGORY II BLDG C
TOPOGRAPHIC FACTOR =	1 EXPOSURE = C
DESIGN WIND PRESSURE (ASCE 7-10 TABLE 28.6-1):	43.8 PSF
INTERNAL PRESSURE COEFFICIENT (ASCE 7-10 TABLE 26.11-1):	± 0.18
<b>LIVE LOADS (IBC SEC 1607)</b>	
OFFICE LOBBIES & CORRIDORS 1ST FLOOR (IBC TABLE 1607.1):	100 PSF
OFFICES (IBC TABLE 1607.1):	50 PSF
ROOF LIVE LOADS (IBC TABLE 1607.1):	20 PSF UNIFORM, 300 LB CONCENTRATED
<b>SNOW LOADS (IBC SEC 1608):</b>	
GROUND SNOW LOAD (IBC FIG 1608.2):	5 PSF

FLOOD ZONE INFORMATION	
REFERENCE PLANS: 1) PLAN OF SURVEY BY J. J. KREBS & SONS, INC., DATED FEB. 1, 1994, RECERTIFIED MAY 26, 1996. 2) PLAN OF SURVEY OF LOTS A & B, BY ALBERT A. LOVELL & ASSOCIATES, INC., DATED 10/27/97.	
FIRM, COMMUNITY NO. 225205, PANEL 0535 D, DATED APRIL 2, 1991.	
FLOOD ZONE:	V12
BASE FLOOD ELEVATION	14' NGVD
ELEVATIONS REFER TO NGVD 1929 DATUM	

GRAPHIC SYMBOLS	
CEILING HEIGHT	FINISHED CEILING DESIGNATION SYMBOL
CEILING MATERIAL	AREA OF DETAIL TO BE ENLARGED
SHEET NUMBER	DETAIL NUMBER
DETAIL NUMBER	ELEVATION TAG
DETAIL NUMBER	SECTION TAG
DETAIL NUMBER	COLUMN GRID IDENTIFIER
REVISION TAG & CLOUD	
DRAWING NO.	DRAWING TITLE
TRUE NORTH	DRAWING SCALE
PLAN NORTH	DRAWING SUBTITLE
DRAWING NO.	DRAWING TITLE
DRAWING SCALE	DRAWING SUBTITLE
ROOM NAME	ROOM TAG
ROOM NUMBER	FLOOR FINISH
FLOOR FINISH	CEILING FINISH
BASE	PARTITION TYPE TAG
LEVEL X	ELEVATION TAG
WINDOW	WINDOW - LOUVER OPENING DESIGNATION
DOOR	REFERENCE WINDOW SCHEDULE
DOOR	DOOR OPENING DESIGNATION
DOOR	REFERENCE DOOR SCHEDULE
KEY NOTE	KEY NOTE (SHEET SPECIFIC)

LIFE-SAFETY LEGEND	
SYMBOL	DESCRIPTION
➤	EXITS
45	DOOR FIRE RATING (MINUTES)
30	DOOR WIDTH/EGRESS CAPACITY
⊙	EXIT LIGHT
FE	FIRE EXTINGUISHER AND CABINET
FE	FIRE EXTINGUISHER IV/ WALL MTD BRACKET
—	COMMON PATH OF TRAVEL
••••••••••	TRAVEL DISTANCE
•	DECISION POINT
---	SMOKE PARTITION
---	ONE-HOUR FIRE RATED PARTITION
---	TWO-HOUR FIRE RATED PARTITION
---	TWO-HOUR FIRE/SMOKE PARTITION
---	FOUR-HOUR RATED PARTITION

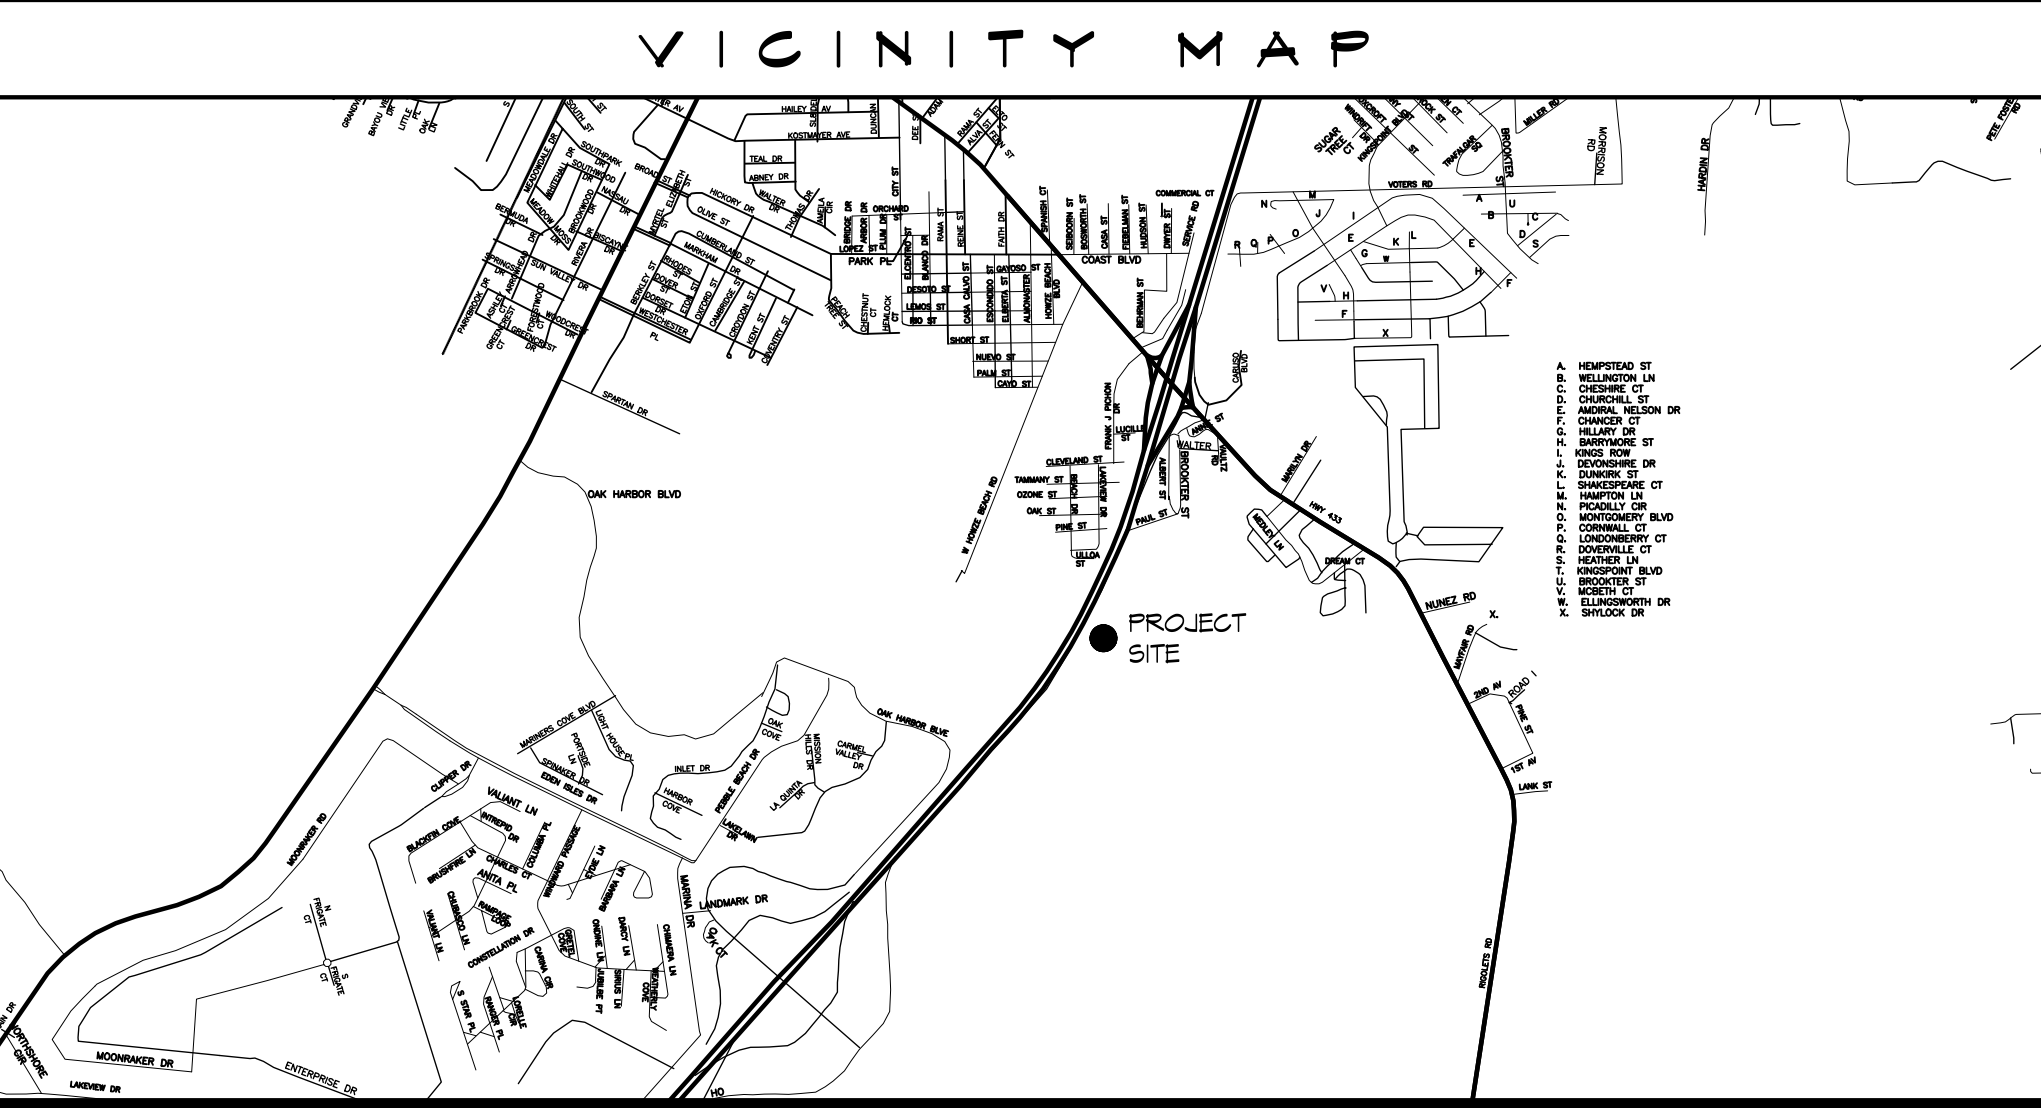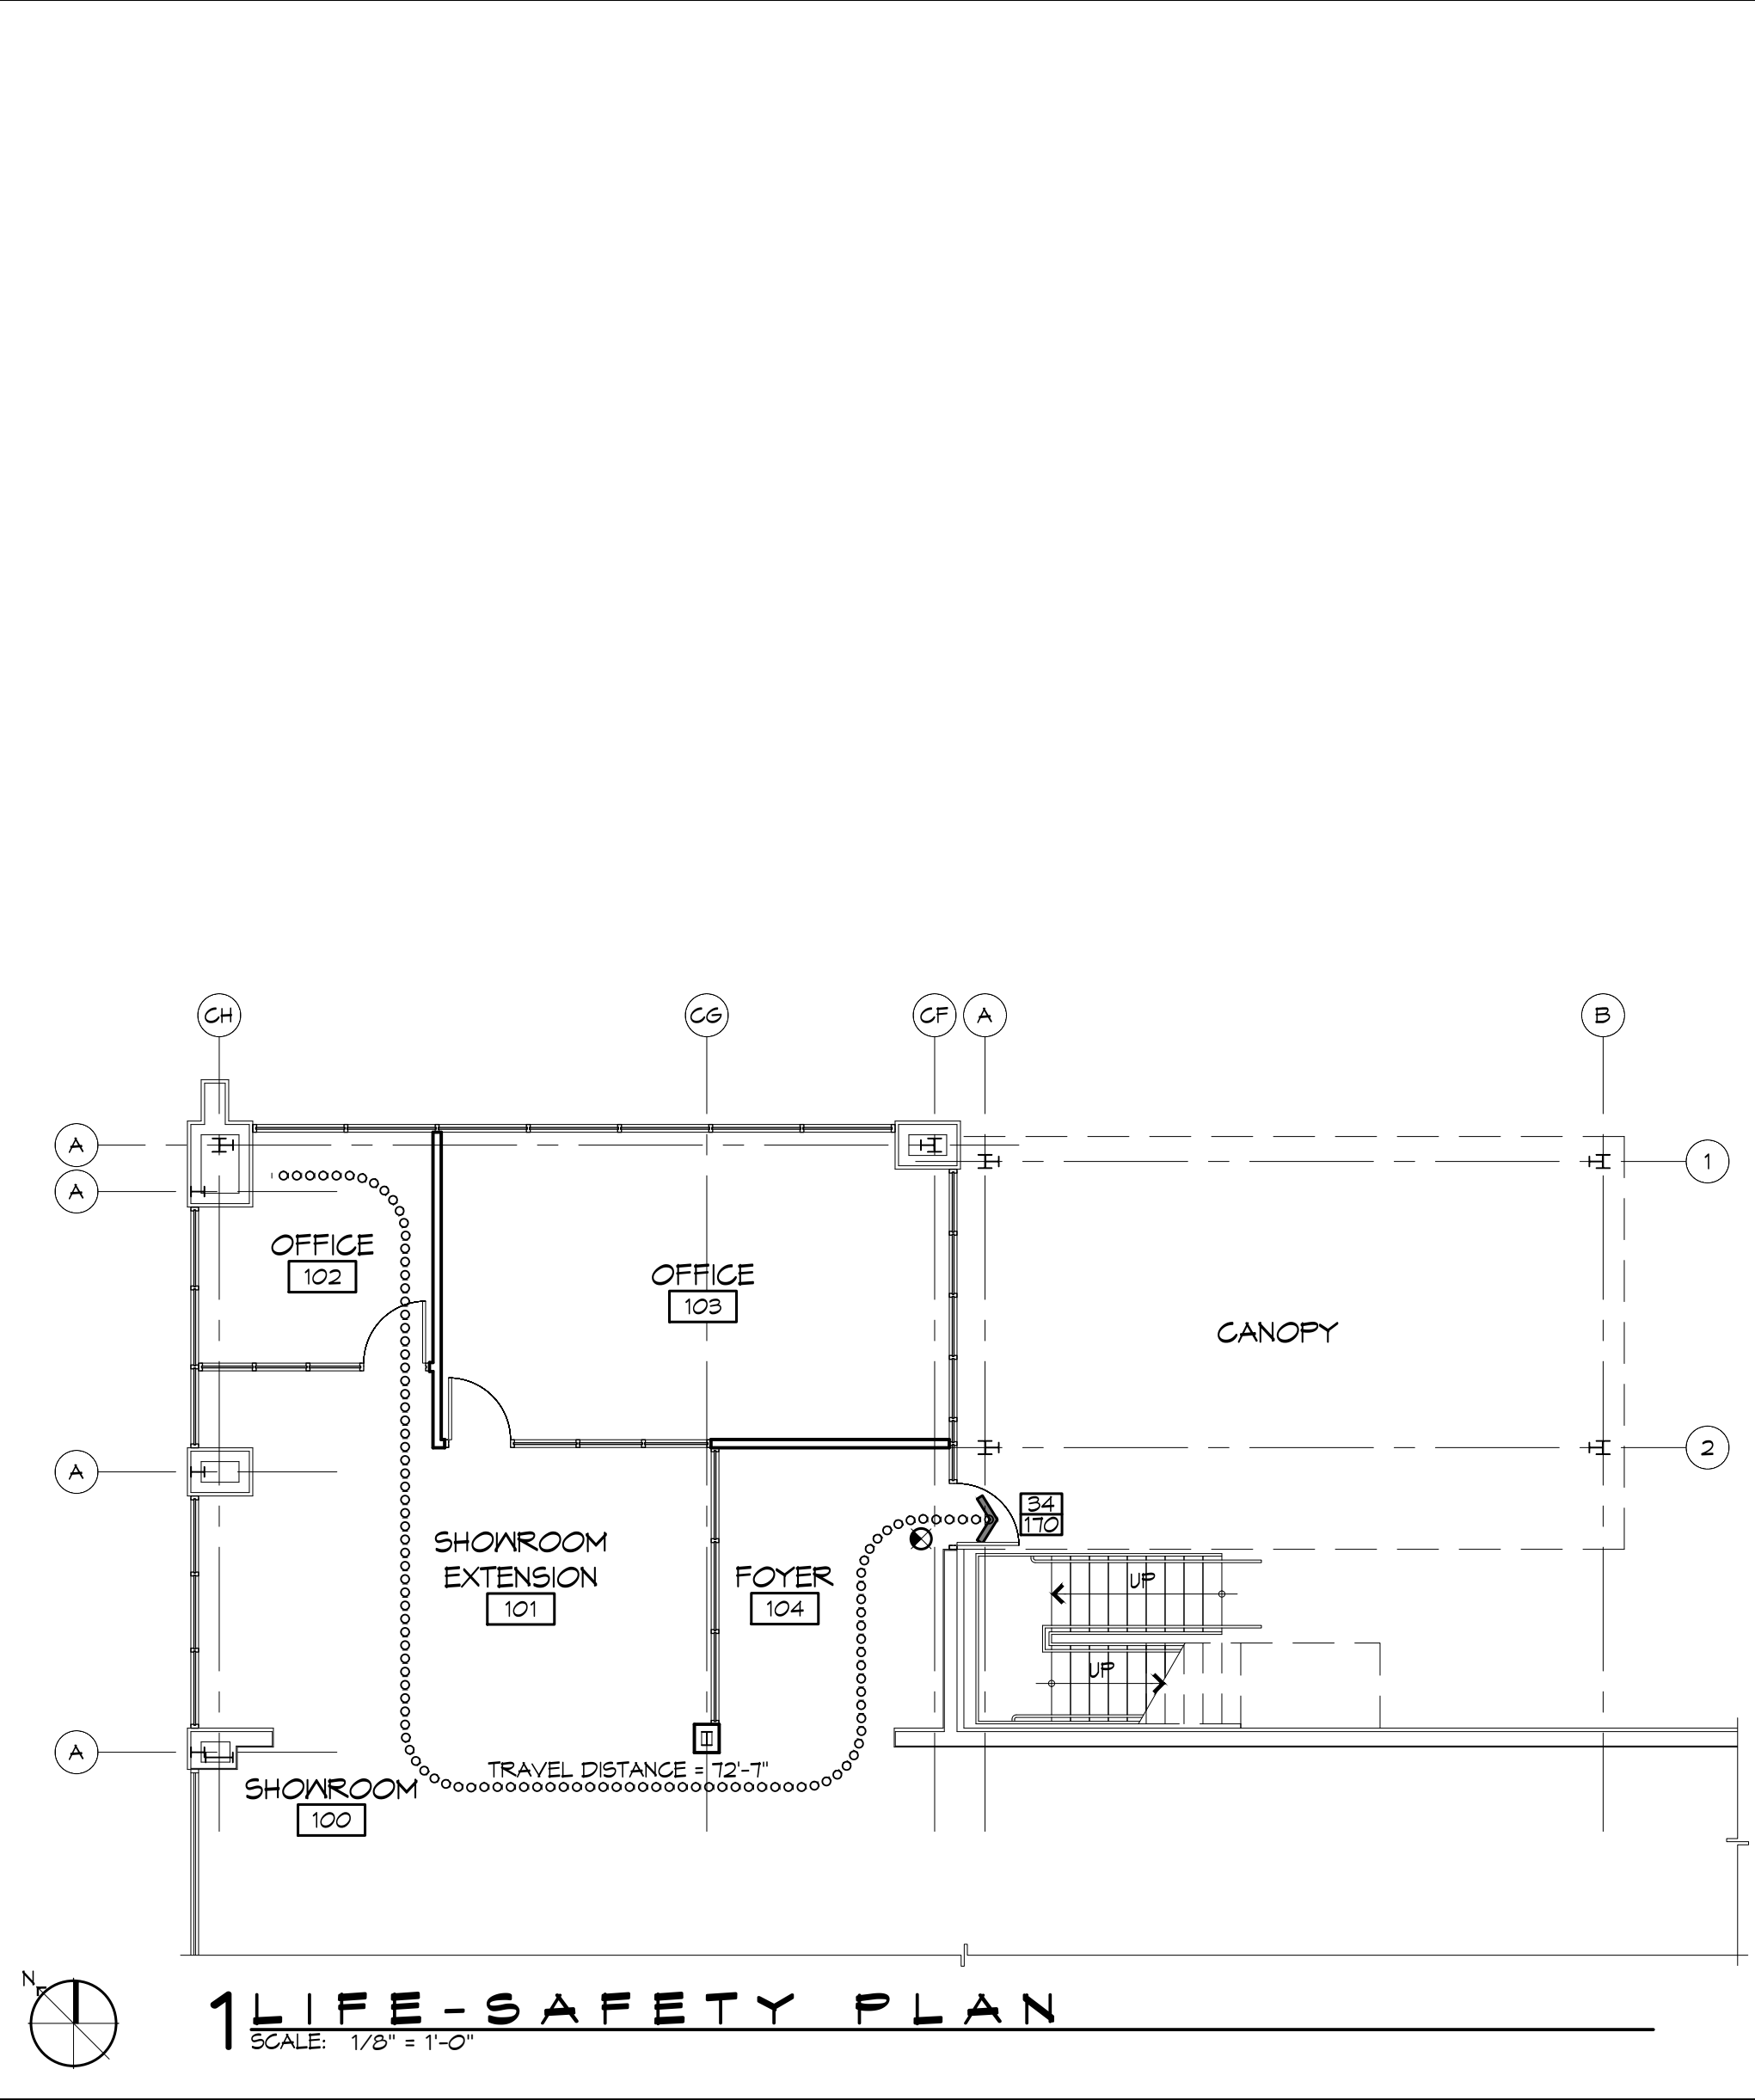

RENOVATIONS TO:

# Honda of Slidell

510 EAST HOWZE BEACH ROAD  
SLIDELL, LA 70461

#	DESCRIPTION	DATE

SHEET INDEX	
SHEET #	SHEET TITLE
6001	GENERAL, LIFE-SAFETY AND CODE INFORMATION SHEET
6002	ACCESSIBILITY INFORMATION
G101	SITE PLAN
S101	FOUNDATION PLAN AND DETAILS
A101	ARCHITECTURAL FLOOR PLAN AND REFLECTED CEILING PLAN
A102	DOOR FRAME AND STOREFRONT ELEVATIONS
ME101	MECHANICAL AND ELECTRICAL FLOOR PLANS AND DETAILS
<b>PROJECT STATISTICS</b>	
SQUARE FOOTAGE	
EXISTING	28,674 SF
NEW	1,104 SF
TOTAL ENCLOSED SPACE	29,778 SF
<b>PROJECT LOCATION:</b>	
510 HOWZE BEACH ROAD SLIDELL, LA 70461 ONERS: HONDA OF SLIDELL 510 HOWZE BEACH ROAD SLIDELL, LA 70461 (985) 644-9091 email: ken@hondaofslidell.com	

GENERAL NOTES	
1.	ALL MATERIALS AND WORK, INCIDENTAL TO THE CONSTRUCTION OF THIS PROJECT, SHALL CONFORM TO ALL GOVERNING CODES, AND REGULATIONS OF AGENCIES IN AUTHORITY.
2.	CONTRACTOR SHALL PROVIDE ALL PUBLIC PROTECTIONS NECESSARY AS REQUIRED BY LAW.
3.	THE DRAWINGS, SPECIFICATIONS AND ANY SUBSEQUENTLY ISSUED ADDENDA, AMENDMENTS OR SUCH CHANGE ORDERS APPROVED BY THE OWNER AND THE CONTRACTOR ARE PART OF THESE CONTRACT DOCUMENTS.
4.	DO NOT SCALE DRAWINGS. CONSULT WITH THE ARCHITECT REGARDING ANY ITEMS IN THE CONTRACT DOCUMENTS THAT REQUIRE CLARIFICATION.
5.	TRASH SHALL BE REMOVED FROM THE SITE NOT LESS THAN TWICE MONTHLY.
6.	THE GENERAL CONTRACTOR SHALL VERIFY EXISTING CONDITIONS PRIOR TO COMMENCING WORK AND REPORT ANY AND ALL DISCREPANCIES TO THE ARCHITECT.
7.	CONTRACTOR VEHICLES AND EQUIPMENT NECESSARY FOR CONSTRUCTION MAY BE PARKED ON THE SITE. OTHER VEHICLES PARKED ON THE SITE REQUIRE THE OWNER'S PERMISSION.
8.	NAMING A CERTAIN BRAND, MAKE OR MANUFACTURER IS TO DESIGNATE THE GENERAL STYLE, TYPE, CHARACTER AND QUALITY STANDARD OF THE PRODUCT DESIRED. SUBSTITUTION REQUESTS MUST BE SUBMITTED PRIOR TO BIDDING.
9.	ALL MATERIALS/EQUIPMENT SHALL BE INSTALLED PER MANUFACTURER'S RECOMMENDATIONS. WORK NOT CONSISTENT WITH MANUFACTURER'S RECOMMENDATIONS WILL BE REJECTED BY OWNER/ARCHITECT.

RENOVATIONS TO:

# HONDA OF SLIDELL

510 EAST HOWZE BEACH ROAD  
SLIDELL, LA 70461

JOB No: 2394 DATE: MAY 1, 2015 CHECKED BY: K-K

DRAWN BY: K-K

SHEET TITLE:  
GENERAL INFORMATION,  
LIFE-SAFETY AND CODE  
INFORMATION

DRAWING NUMBER:  
**6001**

SHEET No: 1 of 7

**DAMMON**  
ENGINEERING, INC.

Architects & Engineers

www.dammonengineering.com  
info@dammon.com  
PH: 985-649-5632  
F: 985-641-5990

Chief Architect: Kevin L. Kincaid, NCAAB  
Chief Engineer: Brian M. Heston, PE  
554 Old Spanish Trail  
Slidell, LA 70459