HEADER SPANS-FOR INT. LOADBEARING WALLS

HEADER SUPPORTING	SIZE	BLDG. WIDTH (ft.) 12	24	36
		SPANS (ft-in.)		
ONE FLOOR (CENTER BEARING)	(2)2x4'S	4'-4"	3'-1"	2'-6"
	(2)2x6'S	6'-5"	4'-6"	3'-8"
	(2)2x8'S	8'-1"	5'-9"	4'-8"
	(2)2x10'S	9'-11"	7'-0"	5'-9"
	(2)2x12'S	11'-6"	8'-1"	6'-7"
	(3)2x8'S	10'-2"	7'-2"	5'-10"
	(3)2x10'S	12'-5"	8'-9"	7'-2"
	(3)2x12'S	14'-4"	10'-2"	8'-3"
	(4)2x8'S	11'-6"	8'-3"	6'-9"
	(4)2x10'S	14'-4"	10'-1"	8'-3"
	(4)2x12'S	*	11'-9"	9'-7"
2 FLOORS ONLY (CENTER BEARING)	(2)2x4'S	2'-10"	2'-1"	1'-8"
	(2)2x6'S	4'-2"	3'-1"	2'-6"
	(2)2x8'S	5'-4"	3'-11"	3'-3"
	(2)2x10'S	6'-6"	4'-9"	3'-11"
	(2)2x12'S	7'-6"	5'-6"	4'-7"
	(3)2x8'S	6'-8"	4'-10"	4'-0"
	(3)2x10'S	8'-1"	6'-0"	4'-11"
	(3)2x12'S	9'-5"	6'-11"	5'-9"
	(4)2x8'S	7'-8"	5'-8"	4'-8"
	(4)2x10'S	9'-4"	6'-10"	5'-8"
	(4)2x12'S	10'-10"	8'-0"	6'-7"

* MAX. SPAN EXCEEDS 16' (SPANS LIM. TO 16')

NOTE:
ALL HEADERS SHALL HAVE SOLID BLOCKING

JACK STUD REQUIREMENTS-FOR INTERIOR LOADBEARING WALLS

HEADER SUPPORTING	HEADER SPAN (ft.)	12 FEET 3"	4.5"	5"	6.5"	24 FEET 3"	4.5"	5"	6.5"	36 FEET 3"	4.5"	5"	6.5"
		ROOF SPAN (ft.) — NO. JACK STUDS REQ.											
ROOF AND CEILING	2	1	1	1	1	1	1	1	1	1	1	1	1
	4	1	1	1	1	1	1	1	1	1	1	1	1
	6	1	1	1	1	1	1	1	1	2	1	1	1
	8	1	1	1	1	2	1	1	1	2	2	2	1
	10	1	1	1	1	2	2	1	1	3	2	2	2
	12	1	1	1	1	2	2	2	1	3	2	2	2
	14	2	1	1	1	3	2	2	2	4	3	3	2
	16	2	1	1	1	3	2	2	2	4	3	3	2
ROOF, CEILING, AND 1 CENTER BEARING FLR.	2	1	1	1	1	1	1	1	1	2	1	1	1
	4	1	1	1	1	2	1	1	1	3	2	2	2
	6	2	1	1	1	3	2	2	2	4	3	3	2
	8	2	2	1	1	3	2	2	2	5	3	3	3
	10	2	2	2	1	4	3	3	2	6	4	4	3
	12	3	2	2	2	5	3	3	3	7	5	4	4
	14	3	2	2	2	5	4	3	3	8	5	5	4
	16	4	3	2	2	6	4	4	3	9	6	5	5

HEADER WIDTH-3" (2-2x), 4.5" (3-2x), 5", 6.5" (4-2x) EACH W/ 1/2" PLYWD. SPACER BETWEEN

UPLIFT CONNECTIONS-155 MPH WINDS EXP. "C"

CONNECTION	FRAMING SPACING (in.)	ROOF SPAN (ft.)	U	L	S	NUM. OF 8d COM. NAILS OR 10d BOX NAILS IN EA. END OF 1-1/4"x20 GA. STRAP
ROOF ASSEMBLY TO WALL ASSEMBLY	16" O.C.	17	386	246	109R	4
WALL ASSEMBLY TO WALL ASSEMBLY	16" O.C.	17	386	246	109R	4
WALL ASSEMBLY TO FOUNDATION	16" O.C.	17	170	185	436	4

HEADER SPANS-EXPOSURE C FOR EXTERIOR LOADBEARING WALLS

HEADER SIZE	SPAN	NO. FULL HGT. STUDS REQ. AT EA. END
(2)2x4'S	4'-7"	2
(2)2x6'S	5'-6"	2
(2)2x8'S	6'-1"	3
(2)2x10'S	6'-8"	3
(2)2x12'S	7'-1"	3
(3)2x8'S	7'-5"	3
(3)2x10'S	8'-3"	3
(3)2x12'S	8'-8"	3
(4)2x8'S	8'-7"	3
(4)2x10'S	9'-6"	3
(4)2x12'S	10'-0"	4

130MPH WINDS-EXPOSURE "B" (TYP.) EACH W/ 1/2" PLYWD. SPACER BETWEEN

NOTE:
BUILDING WIDTH IS MEASURED PERPENDICULAR TO THE RIDGE. FOR WIDTHS BETWEEN THOSE SHOWN, SPANS ARE PERMITTED TO BE INTERPOLATED.

NOTE:
ALL HEADERS SHALL HAVE SOLID BLOCKING

JACK STUD REQ.-EXP. C FOR EXT. LOADBEARING WALLS

HEADER SUPPORTING	HEADER SPAN (ft.)	HEADER WIDTH 3"	4.5"	5"	6.5"
		NO. JACK STUDS REQ.			
ROOF AND CEILING	2	1	1	1	1
	4	1	1	1	1
	6	2	1	2	2
	8	2	2	2	2
	10	3	2	2	2
	12	3	2	2	2
	14	4	3	2	2
	16	4	3	3	2
ROOF, CEILING, AND 1 CENTER BEARING FLR.	2	1	1	1	1
	4	2	1	1	1
	6	2	2	2	1
	8	3	2	2	3
	10	4	3	2	2
	12	4	3	3	2
	14	5	3	3	3
	16	5	4	3	3

HEADER WIDTH-3" (2-2x), 4.5" (3-2x), 5", 6.5" (4-2x) EACH W/ 1/2" PLYWD. SPACER BETWEEN

UPLIFT CONNECTIONS

ROOF ASSEMBLY TO WALL ASSEMBLY:

UPLIFT CONNECTIONS SHALL BE FROM RAFTER OR TRUSS TO WALL STUD. WHEN RAFTERS OR TRUSSES ARE NOT LOCATED DIRECTLY ABOVE STUDS, RAFTERS SHALL BE ATTACHED TO THE WALL PLATE AND THE WALL TOP PLATE SHALL BE ATTACHED TO THE WALL STUD WITH UPLIFT CONNECTIONS. UPLIFT CONNECTIONS SHALL BE IN ACCORDANCE WITH TABLE.

WALL ASSEMBLY TO WALL ASSEMBLY:

STORY TO STORY UPLIFT CONNECTIONS FROM UPPER STORY WALL STUD TO LOWER STORY WALL STUD. WHEN UPPER STORY WALL STUDS ARE NOT LOCATED DIRECTLY ABOVE LOWER WALL STUDS, THE STUDS SHALL BE ATTACHED TO A COMMON MEMBER IN THE FLOOR ASSEMBLY BY UPLIFT CONNECTIONS. UPLIFT CONNECTIONS SHALL BE IN ACCORDANCE WITH TABLE.

WALL ASSEMBLY TO FOUNDATION:

FIRST FLOOR WALL STUDS SHALL BE CONNECTED TO THE FOUNDATION, SILL, PLATE, OR BOTTOM PLATE. A MINIMUM OF A 1-1/4" x 20 GA. ASTM A653 GRADE 33 STEEL STRAP SHALL BE NAILED TO THE WALL STUDS AND HAVE A MINIMUM EMBEDMENT OF 7 INCHES IN CONCRETE FOUNDATIONS AND SLABS-ON-GRADE, 15 INCHES IN MASONRY BLOCK FOUNDATIONS, OR BE LAPPED UNDER THE BOTTOM PLATE, 3 INCH SQUARE WASHERS SHALL BE USED ON THE ANCHOR BOLTS AND ANCHOR BOLT SPACINGS SHALL NOT EXCEED THE REQUIREMENTS. STEEL STRAPS EMBEDDED IN OR IN CONTACT WITH SLAB-ON-GRADE OR MASONRY BLOCK FOUNDATIONS SHALL BE HOT-DIPPED GALV. AFTER FABRICATION, OR MANUF. FROM G185 OR Z450 GALV. STL. CONNECTIONS SHALL BE IN ACCORDANCE WITH TABLE.

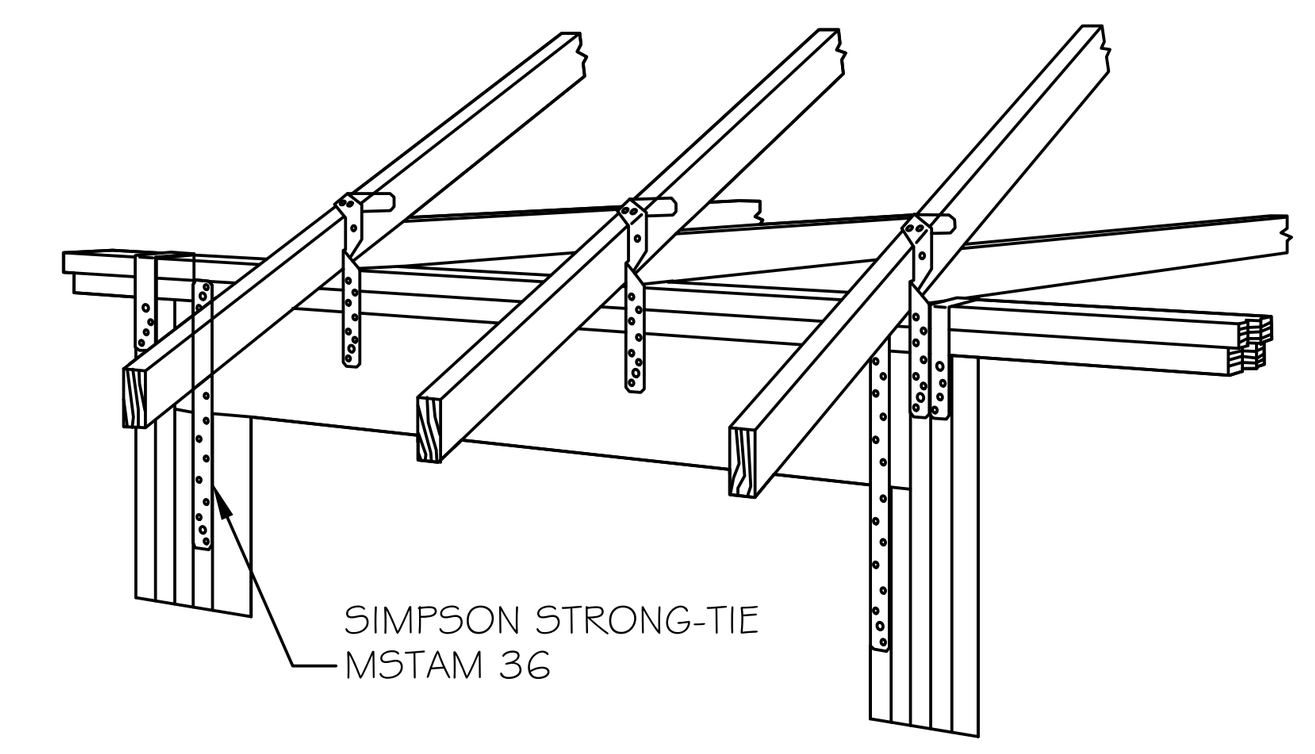

HEADER TO TOP PLATE DETAIL

NTS

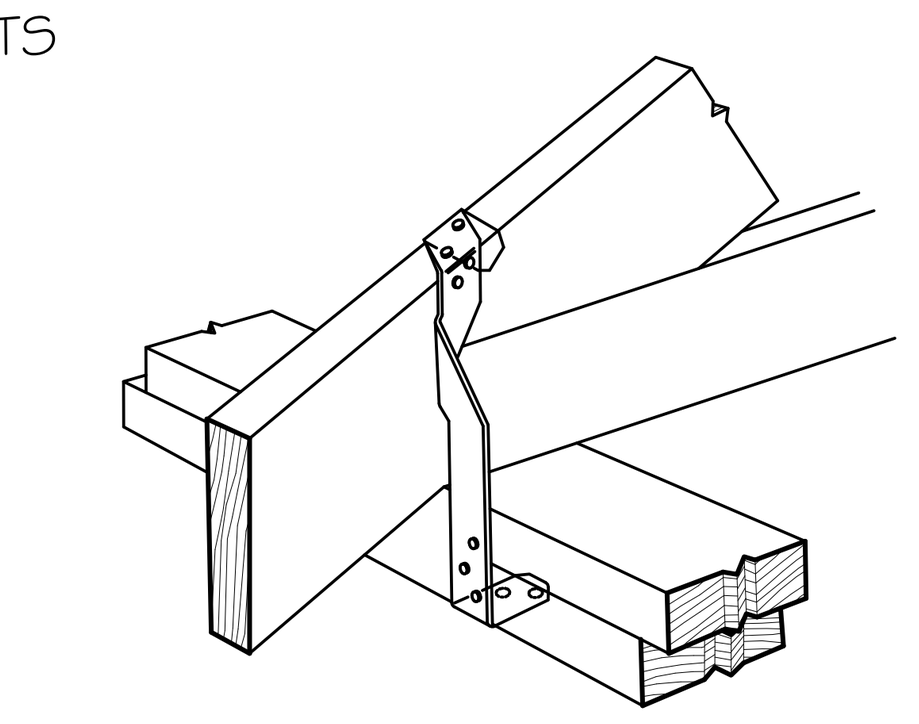

SIMPSON STRONG-TIE
#MTS16

TOP PLATE TO RAFTER DETAIL

NTS

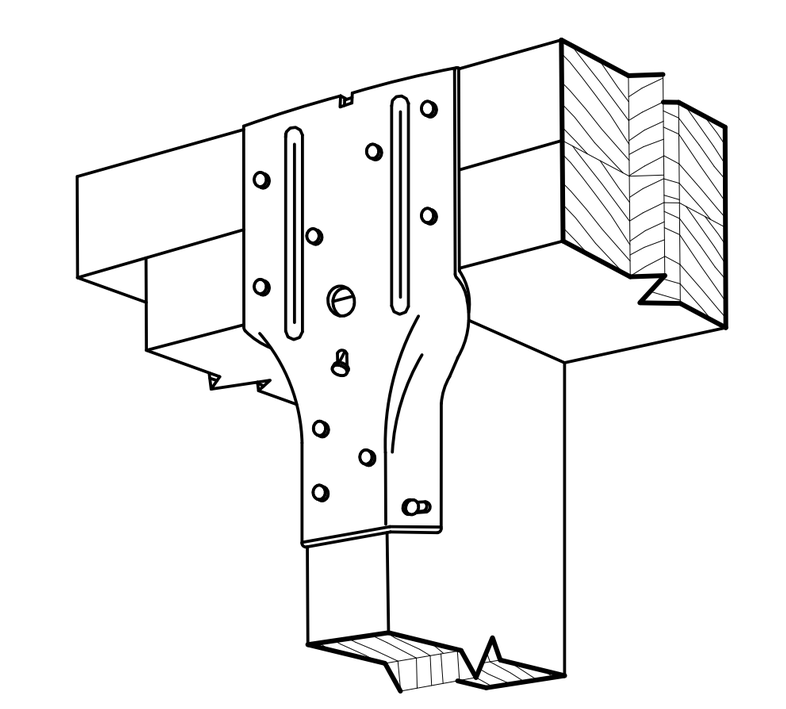

SIMPSON STRONG-TIE
#SP2

STUD TO TOP PLATE DETAIL

NTS

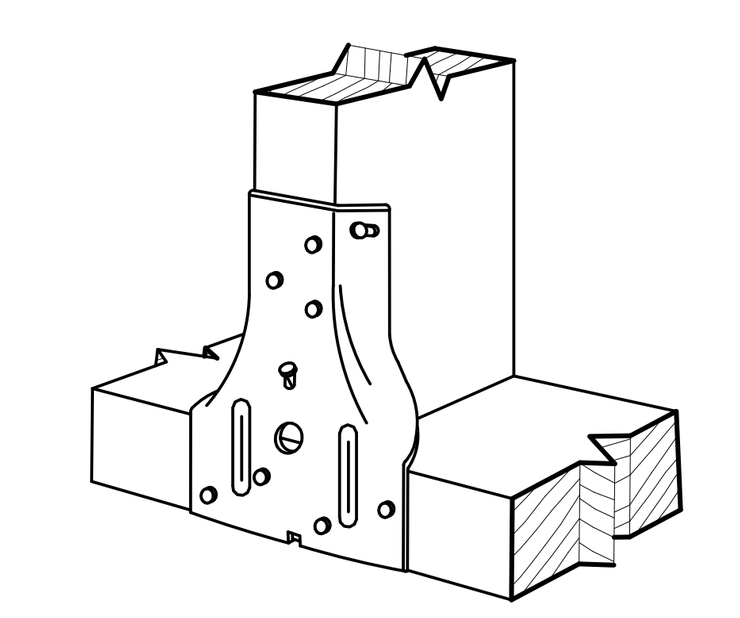

SIMPSON STRONG-TIE
#SP1

STUD TO SOLE PLATE DETAIL

NTS

HEADER NAILING SCHEDULE

DESCRIPTION	NUM. OF COM. NAILS	NUM. OF BOX NAILS	SPACING
HEAD. TO HEAD. (FACE-NAILED)	8d	10d	6" O.C. EDGES/ 12" O.C. FIELD

NOTE:
ALL HEADERS SHALL HAVE SOLID BLOCKING

DESIGN CRITERIA:

THE CONSTRUCTION FOR SAID RESIDENCE, WHERE BASIC WIND SPEED IS 155 MILES PER HOUR, IS DESIGNED IN ACCORDANCE WITH:
AMERICAN FOREST AND PAPER ASSOCIATION (AF&PA)
WOOD FRAME CONSTRUCTION MANUAL FOR ONE AND TWO FAMILY DWELLINGS (WFCM) 2001 EDITION
AS WELL AS THE INTERNATIONAL RESIDENTIAL CODE (IRC) 2009 EDITION

ROOF UNDERLAYMENT APPLICATION

FOR ROOF SLOPES FROM TWO UNITS VERTICAL IN 12 UNITS HORIZONTAL (17-PERCENT SLOPE), UP TO FOUR UNITS VERTICAL IN 12 UNITS HORIZ. (33-PERCENT SLOPE), UNDERLAYMENT SHALL BE TWO LAYERS APPLIED IN THE FOLLOWING MANNER:

APPLY A 19 INCH STRIP OF UNDERLAYMENT FELT PARALLEL WITH AND STARTING AT THE EAVES, FASTENED SUFFICIENTLY TO HOLD IN PLACE. STARTING AT THE EAVE, APPLY 36 INCH WIDE SHEETS OF UNDERLAYMENT, OVERLAPPING SUCCESSIVE SHEETS 19 INCHES, AND FASTENED SUFFICIENTLY TO HOLD IN PLACE.

FOR ROOF SLOPES OF FOUR UNITS VERTICAL IN 12 UNITS HORIZONTAL (33-PERCENT SLOPE) OR GREATER, UNDERLAYMENT SHALL BE ONE LAYER APPLIED IN THE FOLLOWING MANNER:

UNDERLAYMENT SHALL BE APPLIED SHINGLE FASHION, PARELLEL TO AND STARTING FROM THE EAVE AND LAPPED 2 INCHES, FASTENED SUFFICIENTLY TO HOLD IN PLACE. END LAPS SHALL BE OFFSET BY 6 FEET.

ROOF SHEATH. OR CLAD. REQ. FOR WIND LOAD-EXP. C

SHEATHING LOCATION	RAFTER/ TRUSS SPAC.	E	F
		MAX. NAIL SPAC. FOR 8d COM. NAILS OR 10d BOX NAILS (INCHES, O.C.)	
INTERIOR ZONE	12" O.C.	6	12
	16" O.C.	6	12
	24" O.C.	6	12
PERIMETER EDGE ZONE	12" O.C.	6	12
	16" O.C.	6	6
	24" O.C.	6	6

155 MPH WINDS-EXPOSURE "C" (TYP.)

SHINGLE APPLICATION/FASTENING

ASPHALT STRIP SHINGLES SHALL HAVE A MINIMUM OF SIX FASTENERS PER SHINGLE WHERE THE ROOF IS IN ONE OF THE FOLLOWING CATEGORIES:

1. THE BASIC WIND SPEED IS 110 MPH OR GREATER AND THE EAVE IS 20 FEET OR HIGHER ABOVE GRADE.
2. THE BASIC WIND SPEED IS 120 MPH OR GREATER.
3. SPECIAL WIND ZONES.

SILL or BOTTOM PLATE TO FND. CONNECTIONS RESISTING UPLIFT LOADS-155MPH WINDS EXP. "C"

BOTTOM PLATE TO FND. ANCHOR BOLT CONNECTION RESISTING	FOUNDATION SUPPORTING	MAX. ANCHOR BOLT SPACING (in.) 8' END ZONES	INTERIOR ZONES
UPLIFT LOADS	1-3 STORIES	28	33

SILL or BOTTOM PLATE TO FND. CONNECTIONS RESISTING SHEAR LOADS-155MPH WINDS EXP. "C"

BOTTOM PLATE TO FND. ANCHOR BOLT CONNECTION RESISTING	FOUNDATION SUPPORTING	MAX. ANCHOR BOLT SPACING (in.) 1/2" ANC. BOLTS	5/8" ANC. BOLTS
SHEAR LOADS	1-3 STORIES	30	45

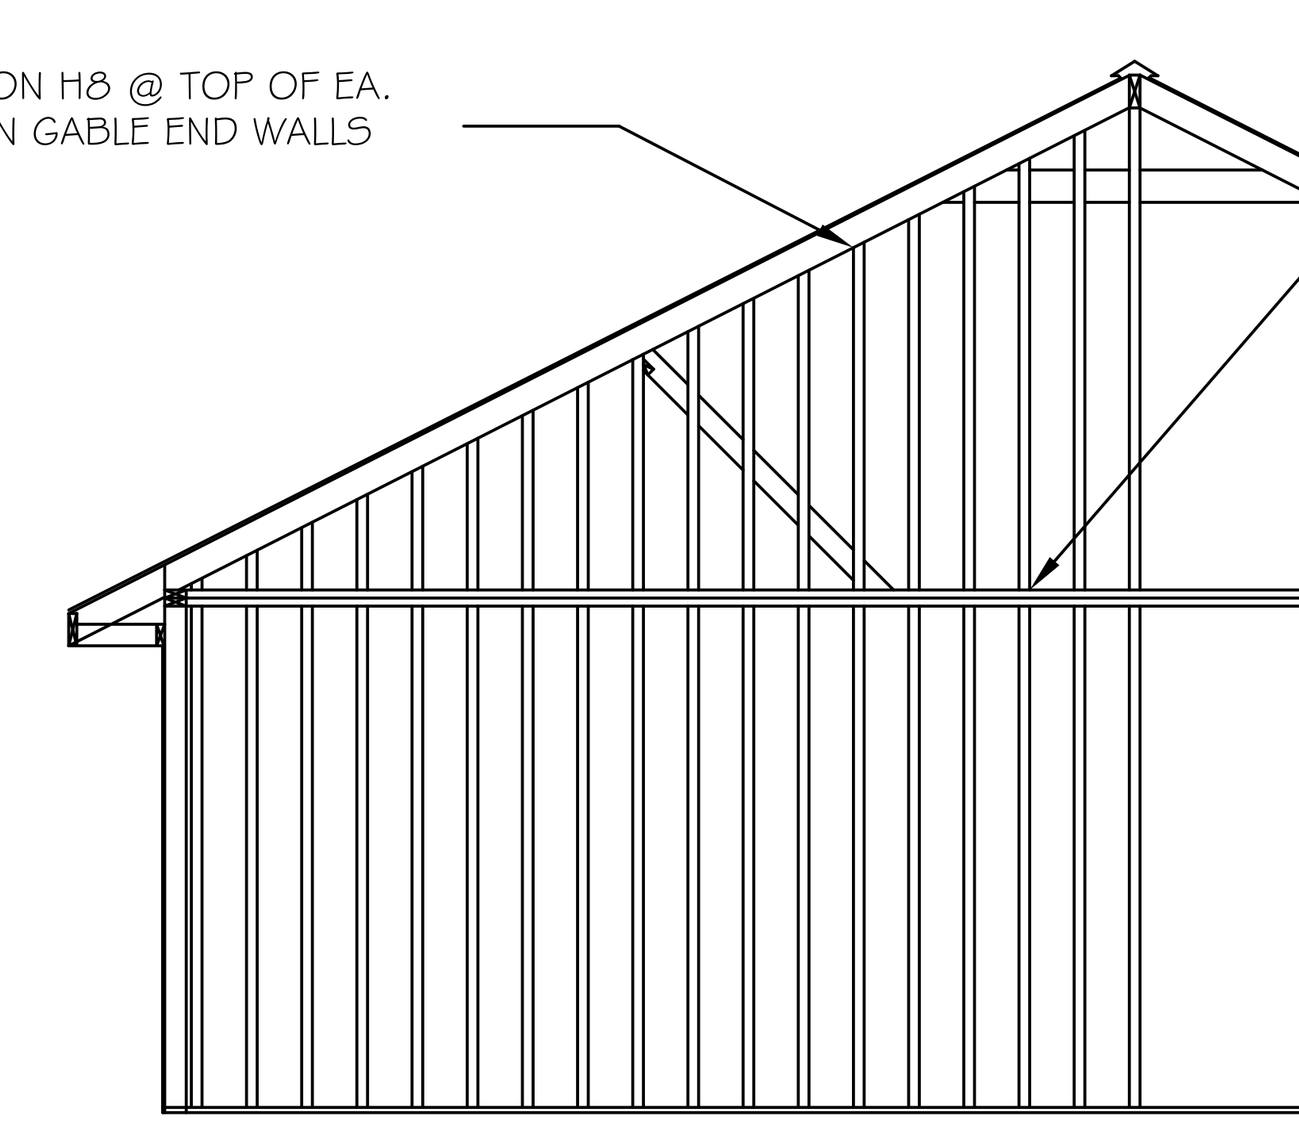

END WALL STRAPPING

NTS

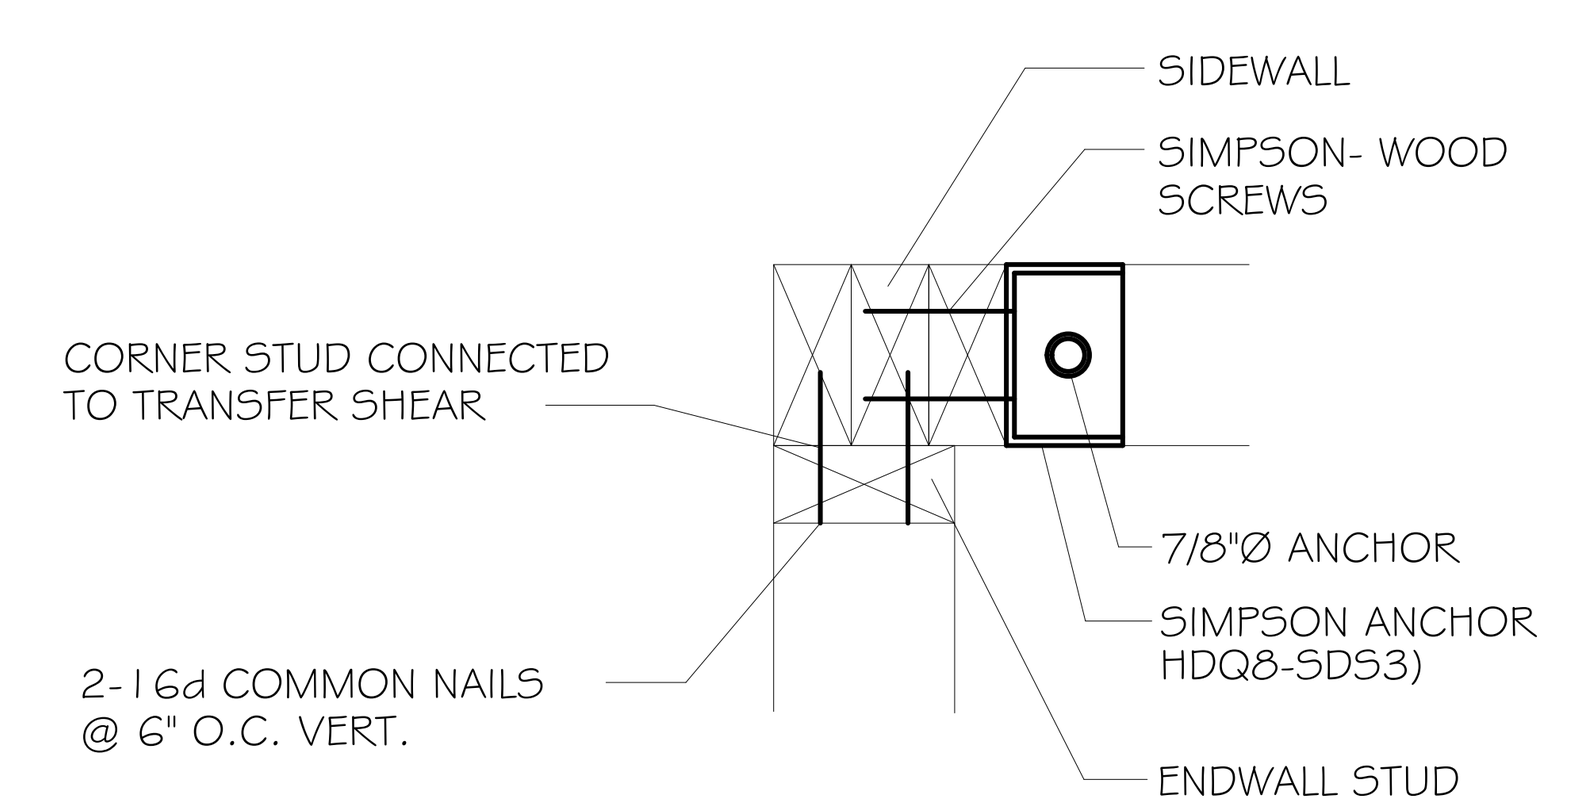

CORNER HOLDDOWN DETAIL

N.T.S.

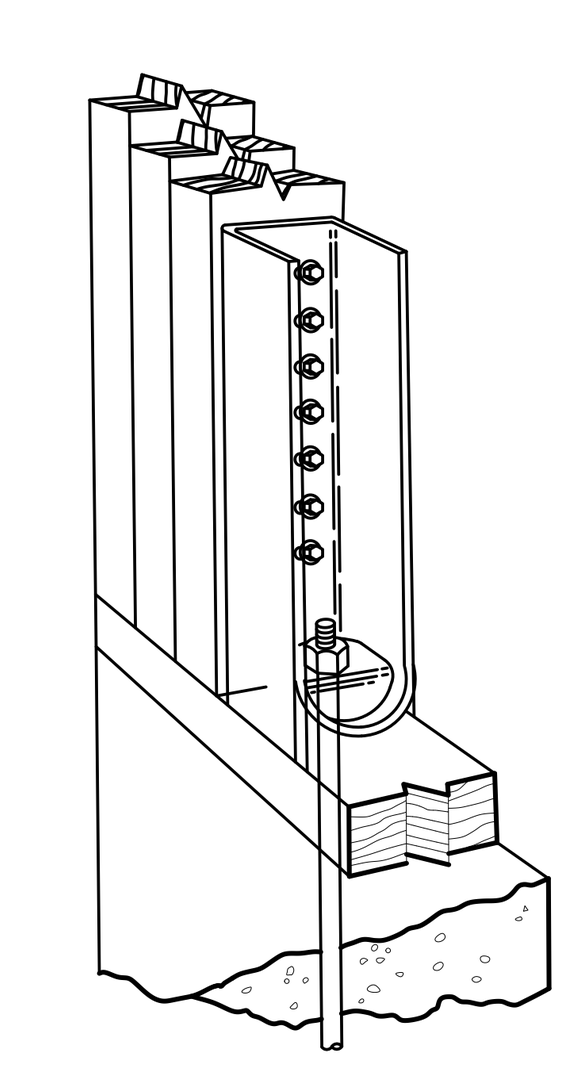

SIMPSON STRONG-TIE
#HDQ8-SDS3

HOLDDOWNS

HOLDDOWNS ARE REQUIRED AT THE END OF EACH SEGMENTED SHEARWALL SEGMENT OR AT THE EACH END OF A PERFORATED SHEARWALL. WHEN FULL HEIGHT SHEARWALL SEGMENTS MEET AT A CORNER, A SINGLE HOLDDOWN SHALL BE PERMITTED TO BE USED TO RESIST THE OVERTURNING FORCES IN BOTH DIRECTIONS WHEN THE CORNER FRAMING IN THE ADJOINING WALLS IS FASTENED TOGETHER TO TRANSFER THE UPLIFT LOAD.

DAMMON ENGINEERING, INC.
Architects & Engineers
dammonengineering.com
dammoneng@bellsouth.net
PHONE: 985-649-5832
FAX: 985-641-5950
CHIEF ENGINEER: EMMETT DAMMON, P.E.
CHIEF ARCHITECT: KEVIN KINCHEN
554 OLD SPANISH TRAIL
SLIDELL, LA 70458

The above drawings and specifications, designs and arrangements represented thereby are and shall remain the property of Dammon Engineering, and no part thereof shall be copied, disclosed to others, or used in connection with any work or project other than the specific project for which the have been prepared and developed without written consent of Dammon Engineering. Visual contact with these drawings or specifications shall constitute conclusive evidence of acceptance of these restrictions.

ST. TAMMANY FIRE PROTECTION DISTRICT No 1
FIRE STATION #14
297 STEELE ROAD
SLIDELL, LA

JOB No: 2161 DATE: 2/8/2013
DRAWN BY: KJK CHECKED BY: KJK

REVISIONS

#	DESCRIPTION	DATE

WOOD FRAMING DETAILS AND INFORMATION

SHEET No: 19 OF 32

A9