

WINDOW SCHEDULE									
WINDOW	TYPE	FRAME	GLASS	LITES	ACCESSORIES			REMARKS	
					VERTICAL SLIDE	HORIZ SLIDE	STEEL		ALUMINUM
A	48" x 60"	FLUSH	PLAIN	2/2					
B	48" x 48"	FLUSH	PLAIN	4/4					
C	VARIES x 48"	FLUSH	INSULATED	3 x 3					
D	VARIES x 48"	FLUSH	INSULATED	8/8					










NOTE: WINDOW FRAME BAKED WHITE EMAMEL, GLASS- INSULATED, TEMPERED GLAZING

OPERABLE WINDOW
A1 PEDIMENT

OPERABLE WINDOW

OPERABLE WINDOW

OPERABLE WINDOW

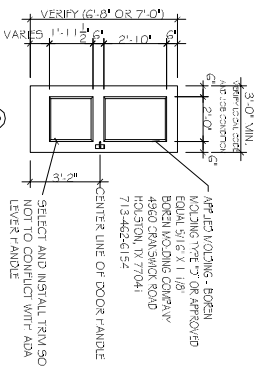

STEEL (2 PANEL)
FIRE RATED

FIRE RATED
STEEL DOOR WITH
WIRE GLASS PANEL

HOLLOW CORE
2 PANEL COLONIST

HOLLOW CORE
2 PANEL COLONIST



FLUSH STEEL
FIRE RATED

CASED
OPENING

STEEL W/ GLAZED INSERT T.D.L.
FIRE RATED GLAZING

FLUSH STEEL
WITH LOUVER

FLUSH STEEL



ENTRY DOOR

FLUSH STEEL
THERMAL GLAZING FULL PANEL

LOCATION: FRONT ENTRANCE & VESTIBULE
STANLEY DURA GUIDE, 3000
SEE SPECIFICATIONS

LOCATION: EXTERIOR AT CORRIDORS
OVERALL WIDTH TO MATCH THE
STACK OF WINDOWS ABOVE

- NOTES:
1. DIMENSIONS SHOWN ON THIS DRAWING ARE FOR PROTOTYPE DESIGN ONLY. VERIFY JOB CONDITION AND LOCAL CODE REQUIREMENT FOR WINDOW AND DOOR SIZES.
 2. VERIFY ROUGH OPENING DIMENSION PER JOB CONDITION.
 3. VERIFY EGRESS AND ANY OTHER REQUIREMENT PER JOB SPECIFIC CONDITION.

DOOR & HARDWARE SCHEDULE													
DOOR	TYPE	FRAME	HINGE	LOOK	ACCESSORIES							REMARKS	
					WEATHERSTRIP	DOOR STOP	ALARM	VIEW GLASS	CLOSER / SPRING HINGE	SIDE LITE(S)	PASSAGE		
1	3'0x6'8x1 3/4	SOLID WOOD											20 MIN RATED
2	3'0x6'8x1 3/4	HOLLOW CORE											90 MIN RATED
3	3'0x6'8x1 3/4	ALUM/GLASS											PROVIDE 1" DOOR STOP @ TWO ROOM SITES
4	3'0x6'8x1 3/4	STEEL/GLASS											45 MIN RATED
5	3'0x6'8x1 3/4	STEEL											
6	VARIES	2 PNL STEEL											
7	3'0x6'8x1 3/4	STEEL											20 MIN RATED
8	3'0x6'8x1 3/4	ALUMINUM											20 MIN RATED
9	3'0x6'8x1 3/4	WOOD											20 MIN RATED
10	7'0	DBL SWNG											4 LITES
11	3'0x6'8x1 3/4	BUTT											FULL LITE

NOTE: EGRESS DOORS SHALL BE READILY OPERABLE FROM THE EGRESS SIDE WITHOUT THE USE OF A KEY OR SPECIAL KNOWLEDGE OR EFFORT.

LAQUINTA INNS & SUITES

HATTISBURG, MISSISSIPPI	2158	12-10-2012	JTL
-------------------------	------	------------	-----



DAMMON
ENGINEERING INC.

CHIEF ENGINEER: EMMETT DAMMON, P.E.
554 OLD SPANISH TRAIL
SUDELL, LA 70458

dammoneng@emg.com
dammoneng@bellsouth.net
PHONE: 985-649-5032
FAX: 985-641-5950