
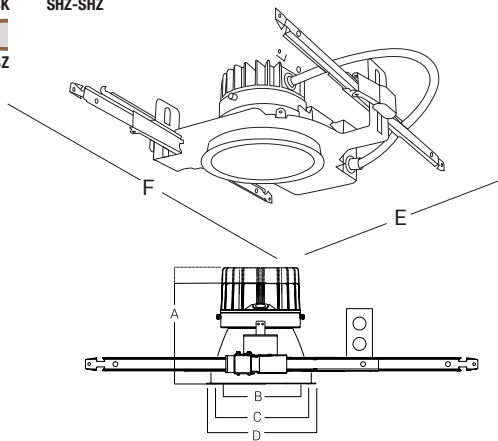


REFLECTOR/
FLANGE COLORS

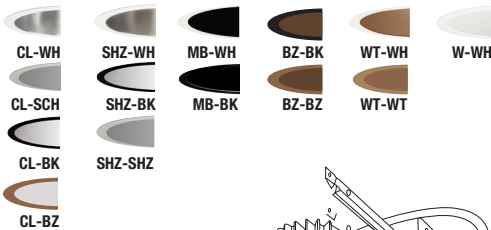

A 900L to 4000L: Height = 5-5/8"
A 6000L to 8000L: Height = 9"
B: Trim Aperture = 6-3/16"
C: Cut-Out = 6-13/16"
D: Trim Outside Dia = 7-3/8"
E: Width = 16"
F: Length = 20-33"

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
6000	6696	72 W
4000	4649	46 W
3000	3374	36 W
2000	2252	22 W
1500	1785	20 W
1200	1422	16 W
900	1065	12 W

Based on 4000K, 90+CRI with semi-specular chrome reflector.
Actual wattage may vary +/-5%

FEATURES


A highly sustainable and ultra-efficient architectural LED downlight that provides even, glare-free illumination. Available in a range of finishes, distributions, and lumen packages, it is ideally suited for use in corporate office space, hospitality, healthcare, commercial, academic, churches and retail.

OPTICS AND REFLECTOR


The reflector has a 45° visual cutoff, and is shipped standard with a Solite lens in a smooth frosted finish. Spun from 0.05" thick aluminum, with a 1-step anodized finish, and available in different colors or custom RAL finishes. Reflector flange options include self-flanged and white painted flange. Various distribution options are available, and all optics are field changeable.

LUMENS	900, 1200, 1500, 2000, 3000, 4000, 6000 (Custom lumen packages available)
CCT & DYNAMIC PLATFORMS	22K, 27K, 30K, 35K, 40K, 50K, Tunable White, Dims to Warm, RGB + White
CRI	90+ Standard, 98+ Optional
COLOR QUALITY	2 Step MacAdam Ellipse
DISTRIBUTIONS	WD (Wide Distribution), MD (Medium Distribution) and ND (Narrow Distribution)
TRIM OPTIONS	Downlight, Wall Wash, Double Wall Wash, Wet Location
REFLECTOR COLORS	CL (Semi-Specular Chrome), SHZ (Low Iridescent Satin Haze), WT (Wheat), W (White), MB (Black), BZ (Bronze)
FLANGE COLORS	Self-Flanged WH (White), SCH (Semi-Specular Chrome), SHZ (Low Iridescent Satin Haze), BK (Black), BZ (Bronze)
DIMMING	0-10V Flicker Free 1% Dimming Standard (DIM10), LUTH, LUTFB, LUT2W, ELDO10.1, ELDDMX.1, ELDDALI.1, DIMTR
EMERGENCY	10W - Up to 1000L Output 20W - Up to 2000L Output EMG-LED-G2-10W-SDT - Self Diagnostic (Consult Factory)
LIFETIME	L70 at 102,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21


WD: Wide
Candlepower Distribution Curve



MD: Medium
Candlepower Distribution Curve



ND: Narrow
Candlepower Distribution Curve



Reference IES files for additional distribution curve information.



THERMAL MANAGEMENT SYSTEM

Passive cooling Diecast Aluminum Heat Sink, LED light engine and driver are replaceable, upgradeable, and can be accessed from below the ceiling. The consistency in the quality of light is delivered with precision performance by the use of a unique locking mechanism that aligns the reflector with the light engine.

MOUNTING FRAME & BRACKETS

The downlight mounting frame is a fabricated assembly constructed of 16-gauge steel, with C-channel mounting brackets, included. The versatility of the mounting brackets allow for an adjustability of up to 28" horizontally, and 2-3/4" vertically, locking into place. With the added die-formed construction of the mounting frame, it provides maximum heat dissipation and rust protection.

DRIVER ELECTRICAL INFORMATION

The LED driver is rated for 50 to 60Hz at 120V/277V, also available in 347V input, produces less than 20%THD, has a power factor between 90% and 100%, and is thermally protected for additional safety. Junction box and Driver can be accessed from below the ceiling and above the ceiling. Junction Box is Listed for through branch circuit wiring.

DIMMING & DRIVER INFORMATION

DIM10 - 0-10V dimming on either MVOLT 120, 277 or 347V. Dimmable down to 1% of initial lumens, standard.

DIMTR - Triac & Electronic low voltage dimming. Available in 120V, and up to 4000 lumens only.

LUT2W - Lutron LTEA2W Hi-Lume 1%. 2-wire LED Driver 120V Forward Phase only. Available on all luminaires up to 3000 lumens.

LUTH - Lutron LDE1 Hi-Lume 1% Eco System LED driver with Soft-on, Fade to Black dimming technology. Available on all luminaires up to 3000 lumens.

LUTFB - Lutron PEQ0E Hi-Lume Premier 1% Eco System LED Driver with Soft-on, Fade to Black dimming technology. Available on all luminaires up to 1500 lumens.


ELDO10.1 - EldoLED SoloDrive 0-10V. Dimming down to 0.1%.


DALI - DALI DT6, DT8 dimming down to 1%.


ELDODMX - EldoLED PowerDrive dimming down to 0.1%.

Please see EldoLED website for wiring diagrams and a list of compatible DMX and DALI control systems.

LED DYNAMIC PLATFORM OPTIONS

 Tunable White with Smart White Technology utilizing the Lumenetix Platform allows you to color tune the luminaire via various controls. Create the perfect environment for the desired use of the space, while maintaining a CRI of 90+ across the tunable range of 8000 to 1650K. (Click here for more details)

 Dims to Warm with Smart Dimming Technology. At 100% full brightness the luminaire is at 3000K. When dimmed to 1%, the light transitions to 1800K, creating a warm ambiance within the space. (Click here for more details)

 RGB+White with Smart Hue Technology provides full color mixing of RGB and white colors. Utilizing the Lumenetix Platform allows you to choose from unlimited RGB color options, via various controls. Ideal for Circadian Rhythm applications or to create the perfect human centric environment. (Click here for more details)

WARRANTY

Five-year warranty for parts and components. (Labor not included)

LISTINGS

c-UL-us - Listed for Wet Location if used with HH6-6501, HH6-6535, HH6-6534 Trim.

c-UL-us - Listed for Feed Through Wiring.

U.S Patent No. - D685,118S

CP-City of Chicago environmental air (CCEA) marking for plenum applications.

Energy Star and California Title 24 compliant

Optional Black color trim is not ENERGYSTAR certified and won't meet the requirement.

Example: **HH6-LED-2000L-DIM10-MVOLT-MD-40K-90-HH6-6501-CL-WH**

SERIES	LUMENS	DRIVER	VOLTAGE	CCT	EMERGENCY	TRIM TYPE	REFLECTOR/FLANGE COLORS	
HH6-LED	<input type="checkbox"/> 900L	<input type="checkbox"/> DIM10	<input type="checkbox"/> 120	<input type="checkbox"/> 22K	<input type="checkbox"/> EMG-LED-10W	<input type="checkbox"/> HH6-6501 Flanged Downlight	<input type="checkbox"/> CL-WH <input type="checkbox"/> W-WH <input type="checkbox"/> SHZ-SHZ	
	<input type="checkbox"/> 1200L	<input type="checkbox"/> DIMTR ^{2 5}	<input type="checkbox"/> 277	<input type="checkbox"/> 27K	<input type="checkbox"/> EMG-LED-20W	<input type="checkbox"/> HH6-6507 Flanged Wall Wash	<input type="checkbox"/> CL-SCH <input type="checkbox"/> MB-WH* <input type="checkbox"/> SHZ-BK	
	<input type="checkbox"/> 1500L	<input type="checkbox"/> LUTH ^{2 5}	<input type="checkbox"/> MVOLT	<input type="checkbox"/> 30K	<input type="checkbox"/> INTG-EMG-LED-10W	<input type="checkbox"/> HH6-6577 Flanged Double Wall Wash	<input type="checkbox"/> CL-BK <input type="checkbox"/> MB-BK* <input type="checkbox"/> WT-WH	
	<input type="checkbox"/> 2000L	<input type="checkbox"/> LUT2W ^{2 5}	<input type="checkbox"/> 347 (DIM10 only)	<input type="checkbox"/> 35K	<input type="checkbox"/> INTG-EMG-LED-20W		<input type="checkbox"/> CL-BZ <input type="checkbox"/> BZ-BK <input type="checkbox"/> WT-WT	
	<input type="checkbox"/> 3000L	<input type="checkbox"/> LUTFTB ⁶		<input type="checkbox"/> 40K	<input type="checkbox"/> EMG-LED-G2-10W-SDT* Typical lumen output of the luminaire is up to 1000L with EMG-LED-10W option & 2000L with EMG-LED-20W option in emergency mode. Contact the factory for details. Remote mounted installation * Consult Factory for Self Diagnostic		<input type="checkbox"/> SHZ-WH <input type="checkbox"/> BZ-BZ <input type="checkbox"/> BZ-BZ <small>* Black color trim is not ENERGYSTAR certified</small>	
	<input type="checkbox"/> 4000L	<input type="checkbox"/> ELDO10-.1 ²		<input type="checkbox"/> 50K ³		<input type="checkbox"/> HH6-6535 Polycarbonate "Dead Front" Trim with Tempered Albalite Lens	FLANGE COLORS	
	<input type="checkbox"/> 6000L	<input type="checkbox"/> ELDODALI-.1 ²				<input type="checkbox"/> HH6-6534 Polycarbonate "Dead Front" Trim with Polycarbonate ClearLens	<input type="checkbox"/> WH <input type="checkbox"/> BK <input type="checkbox"/> SHZ	
		<input type="checkbox"/> ELDODMX-.1 ²					<input type="checkbox"/> SCH <input type="checkbox"/> BZ	
				OPTICS	CRI	OTHER OPTIONS	TRIMLESS	TRIMLESS FINISH
				<input type="checkbox"/> WD	<input type="checkbox"/> 90+	<input type="checkbox"/> CP (Chicago Plenum)	<input type="checkbox"/> HH6-TL-6501 Trimless Downlight	<input type="checkbox"/> CL
			<input type="checkbox"/> MD	<input type="checkbox"/> 98+ ⁴		<input type="checkbox"/> HH6-TL-6507 Trimless Wall Wash	<input type="checkbox"/> MB	
			<input type="checkbox"/> ND				<input type="checkbox"/> SHZ	
						OPTIONS	<input type="checkbox"/> WH	
						<input type="checkbox"/> INTG (Reflector shipped with pre-punched hole to accept INTG-EMG-LED)		

² LUTH, ELDO10-.1, ELDODALI-.1, and ELDODMX-.1 are available in 120V and 277V ³ 50K series are available with 85+ CRI only ⁴ 98+ CRI is available in 27K, 30K and 40K only

⁵ LUTH and LUT2W, DIMTR Available for luminaires up to 4000L ⁶ LUTFTB Available for luminaires up to 1500L

-Reference last page for Control Options

HH6-LED-4000L-DIM10-MVOLT-ND-40K-90-HH6-6501-CL-WH

TEST NO.: **EL1218130**

INPUT WATTS: **46.2**

LUMENS: **4649**


CRI: **90**

EFFICACY: **101**

CCT: **4000K**

SPACING CRITERIA: **0.60**

Candle Power Distribution (Candelas)



Cone of Light			
2	2077	1.1	1.2
4	519	2.2	2.4
6	231	3.4	3.6
8	130	4.5	4.8
10	83.1	5.6	6
12	57.7	6.7	7.1

BEAM DIA. MEASURED AT 50% OF NAIDR F.C.

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	1918.37	N.A.	41.30
0-30	3045.18	N.A.	65.50
0-40	4085.62	N.A.	87.90
0-60	4618.13	N.A.	99.30
0-80	4646.95	N.A.	100.00
0-90	4649.1	N.A.	100.00

Luminance (Average candela/M²)

Angle in Degrees	Average		
	0°	45°	90°
45	20041	53864	48600
55	6940	10524	10384
65	827	3528	5155
75	489	956	995
85	302	1986	2206

Lumens Per Zone

Zone	Lumens
0-10	680.61
10-20	1237.76
20-30	1126.81
30-40	1040.44
40-50	442.60
50-60	89.91
60-70	24.89
70-80	3.93
80-90	2.16

Candela Tabulation

0	0
0	8307.41
5	7519.75
15	4249.07
25	2353.57
35	1799.30
45	258.74
55	72.68
65	6.38
75	2.31
85	0.48
90	0.19

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80%				70%				50%				30%				10%				0%			
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%					
ROOM CAVITY RATIO	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					
1	113	111	108	106	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93					
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87	87					
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80	80					
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75	75					
5	92	84	78	73	90	83	77	73	81	76	72	79	75	72	78	74	71	70	70					
6	87	79	73	68	86	78	72	68	76	71	68	75	70	67	74	70	67	65	65					
7	83	74	68	64	82	73	68	63	72	67	63	71	66	63	70	66	62	61	61					
8	79	70	64	60	78	69	63	59	68	63	59	67	62	59	66	62	59	57	57					
9	76	66	60	56	74	65	60	56	64	59	56	64	59	56	63	59	55	54	54					
10	72	63	57	53	71	62	57	53	61	56	53	60	56	53	60	55	52	51	51					

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

HH6-LED-4000L-DIM10-MVOLT-MD-40K-90-HH6-6501-CL-WH

TEST NO.: **EL1218126**

INPUT WATTS: **46.2**

LUMENS: **4393**


CRI: **90**

EFFICACY: **95**

CCT: **4000K**

SPACING CRITERIA: **0.92**

Candle Power Distribution (Candelas)



Cone of Light			
2	1075	2.2	2.2
4	269	4.4	4.5
6	119	6.6	6.7
8	67.2	8.9	9
10	43	11.1	11.2
12	29.9	13.3	13.5

BEAM DIA. MEASURED AT 50% OF NAIDR F.C.

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	1489.95	N.A.	33.90
0-30	2726.91	N.A.	62.10
0-40	3722.28	N.A.	84.70
0-60	4355.2	N.A.	99.10
0-80	4391.19	N.A.	100.00
0-90	4393.23	N.A.	100.00

Luminance (Average candela/M²)

Angle in Degrees	Average		
	0°	45°	90°
45	41339	57536	56466
55	9497	17462	17670
65	859	3690	8453
75	493	956	976
85	302	1835	2011

Lumens Per Zone

Zone	Lumens
0-10	407.28
10-20	1082.67
20-30	1236.96
30-40	995.37
40-50	505.62
50-60	127.30
60-70	31.99
70-80	4.00
80-90	2.04

Candela Tabulation

0	0
0	4298.60
5	4257.74
15	3902.42
25	2658.34
35	1596.48
45	533.72
55	99.46
65	6.63
75	2.33
85	0.48
90	0.21

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80%				70%				50%				30%				10%				0%			
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%					
ROOM CAVITY RATIO	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100					
1	113	110	108	105	111	108	106	104	104	104	102	100	100	99	97	97	96	95	93					
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85	85					
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	85	83	80	78	78					
4	95	87	81	77	94	86	81	77	84	79	76	82	78	75	80	77	74	72	72					
5	90	81	75	70	89	80	74	70	78	73	69	77	72	69	75	71	68	67	67					
6	85	76	69	65	84	75	69	65	73	68	64	72	67	64	71	66	63	62	62					
7	81	71	64	60	79	70	64	60	69	63	59	68	63	59	66	62	59	57	57					
8	76	66	60	56	75	66	60	55	65	59	55	64	59	55	63	58	55	53	53					
9	73	62	56	52	71	62	56	52	61	55	52	60	55	51	59	54	51	50	50					
10	69	59	53	48	68	58	52	48	57	52	48	57	52	48	56	51	48	47	47					

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

HH6-LED-4000L-DIM10-MVOLT-WD-40K-90-HH6-6501-CL-WH

TEST NO.: **EL1218125**

INPUT WATTS: **46.3**

LUMENS: **4048**


CRI: **90**

EFFICACY: **87**

CCT: **4000K**

SPACING CRITERIA: **1.10**

Candle Power Distribution (Candelas)



Cone of Light			
2	671	2.7	2.8
4	168	5.4	5.7
6	74.5	8.2	8.5
8	41.9	10.9	11.3
10	26.8	13.6	14.2
12	18.6	16.3	17

BEAM DIA. MEASURED AT 50% OF NAIDR F.C.

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	1061.46	N.A.	26.20
0-30	2201.23	N.A.	54.40
0-40	3195.67	N.A.	79.00
0-60	3993.78	N.A.	98.70
0-80	4045.66	N.A.	100.00
0-90	4047.62	N.A.	100.00

Luminance (Average candela/M²)

Angle in Degrees	Average		
	0°	45°	90°
45	67380	63901	57366
55	31338	23228	14462
65	14644	4217	861
75	969	969	476
85	1848	1672	245

Lumens Per Zone

Zone	Lumens
0-10	261.13
10-20	800.34
20-30	1139.76
30-40	994.45
40-50	599.02
50-60	199.09
60-70	47.60
70-80	4.28
80-90	1.95

Candela Tabulation

0	0
0	2682.23
5	2718.78

- 1- Luminaire will be shipped with Powerpacks pre-installed, ready to be integrated to designated control systems
- 2- Luminaire will be shipped with Sensors installed on the luminaire, allowing for individual luminaire control. Luminaires will be ready to be integrated with designated control systems
- 3- Luminaire will be shipped with Sensors to be remotely installed on the ceiling. Luminaires will be ready to be integrated with designated control systems

BRAND	EASYFIT <small>by EnOcean</small>	LUTRON	enlighted	LEVITON®	OSRAM	PHILIPS <small>EasySense</small>	legrand®
CONTROL UNIT	<input type="checkbox"/> LEDRU LED Relay Zone Controller 0-10V ¹ <input type="checkbox"/> LEDDU LED Zone Controller 0-10V ¹	<input type="checkbox"/> FCJS-010 Lutron Vive 0-10V Individual Pow Pak (Luminaire is shipped Vive Enabled) ¹⁴ <input type="checkbox"/> FCJS-ECO Lutron Vive Eco-system Pow Pak (Luminaire is shipped Vive Enabled) ¹⁴	<input type="checkbox"/> CU-4E-FMH Fixture Mount Control Unit ¹⁵	<input type="checkbox"/> ZL027 –NOW Intellect Power Control Module ¹⁶ <input type="checkbox"/> ZL027 –NOW Intellect Power Control Module ¹⁶	<input type="checkbox"/> EN-WCM2-ZB-DR Wireless Control Module ¹⁷ <input type="checkbox"/> EN- ALC-ZB-BK-DR Wireless Area Lighting Control Module ¹⁷ <input type="checkbox"/> ZBHA-CLM-DIM-ENC Connected Lighting Module DIM ¹⁷	<input type="checkbox"/> SBR -BS Xitanium SR Bridge ¹⁸	<input type="checkbox"/> LMFC-011 ON/OFF/0-10V dimming fixture controller ¹⁹ <input type="checkbox"/> LMFS-601 Integrated Fixture Sensor & Controller
INTEGRAT SENSOR	N/A	N/A	N/A	N/A	N/A	N/A	N/A
*WIRELESS OCCUPANCY SENSOR	<input type="checkbox"/> EOSCU-W-E0 Occupancy Sensor - Ceiling Mounted (Must be specified with LEDRU or LEDDU control unit)³	N/A	N/A	N/A	N/A	N/A	<input type="checkbox"/> LMDC-100 Dual technology PIR Ceiling Mount Occupancy Sensor ³
*WIRELESS DAYLIGHT SENSOR	<input type="checkbox"/> ELLSU-W-E0 Light Level Sensor - Ceiling Mounted (Must be specified with LEDRU or LEDDU control unit)³	N/A	N/A	N/A	N/A	N/A	<input type="checkbox"/> LMLS-400 Single zone switching and dimming digital photosensor ³
*WIRELESS OCCUPANCY & DAYLIGHT SENSOR	N/A	N/A	<input type="checkbox"/> SU-5E-IoT IoT Node Micro Sensor ³ <input type="checkbox"/> SU-5E-CL Connected Lighting Micro Sensor ³ <input type="checkbox"/> SU-5E-IL Independent Lighting / Enlighted One Micro Sensor ³ <input type="checkbox"/> SU-5S-H-(IoT/CL/IL) Surface Mount Sensor ³ (Must be specified with CU- 4E-FMH Control Unit)	<input type="checkbox"/> ZL00J -TOW Intellect Intelligent Fixture Control System ³ (Must be specified with ZL027 –NOW Control Unit)	<input type="checkbox"/> EN-CLM-PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor <input type="checkbox"/> EN-SCPPH-1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ³ (Must be specified with EN-WCM2-ZB-DR or EN- ALC-ZB-BK-DR Control Unit)	<input type="checkbox"/> SNS200- CMP SNS200 for grouping ³	<input type="checkbox"/> LMFS-601 DLM Fixture Sensor and Controller, Occupancy, Daylight Harvesting, and IPv6/Bluetooth® Low Energy Technology
ACCESSORIES	N/A	N/A	<input type="checkbox"/> TMC-SU-5E Tile Mount Carrier <input type="checkbox"/> CBL-5E-CU4-30N 30 inch Sensor Cable for CU-4 and IoT Ready™ drivers <input type="checkbox"/> CBL-5E-CU4-7F 7 foot Sensor Cable for CU-4 and IoT Ready™ drivers	N/A	N/A	N/A	N/A
NOTES	N/A	4- Luminaire will be compatible with Lutron LRF2-OCR2B-P-WH Ceiling mount 360° occupancy/vacancy sensor & LRF2-DCRB-WH Ceiling-mount daylight sensor. Sensors must be ordered through Lutron.	5- Luminaire will be compatible with ENLIGHTED SU-5E-IoT, SU-5E-CL, SU-5E-IL, SU-5S-H, Sensors.	6-Luminaire will be compatible with Leviton Intellect App & Keypad Room Controller	7-Luminaire will be compatible with EN-SCPPH-1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors	8-Luminaire will be compatible with Philips field and wireless switch.	9-Luminaire will be compatible with DLM Room control system LMPB-100. DLM control system must be orderd through Legrand.