


BACKFILL:
12" MIN SELECT COMPACTED STRUCTURAL MATERIAL FREE OF DEBRIS AND VOIDS. COMPACT TO 95% DRY DENSITY PER ASTM D-1557

HAUNCHING:
WELL GRADED GRAVELLY SAND WITH <5% FINES WORK IN AROUND PIPE BY HAND TO PROVIDE UNIFORM SUPPORT

BEDDING:
CRUSHED LIMESTONE OR GRAVEL COMPACTED TO 95% DRY DENSITY PER ASTM D-1557


NOTE:
CONTRACTOR SHALL PROVIDE SHEETING AND BRACING TO CONTROL THE WIDTH OF EXCAVATED TRENCH AND TO SAFEGUARD THE INTEGRITY OF THE SEWER TRENCH. CONTRACTOR SHALL PROVIDE SUFFICIENT SHEETING AND BRACING TO PROVIDE SAFE WORKING CONDITIONS FOR HIS WORKMEN.

PIPE BEDDING IN SEEDED AREA (TYP)

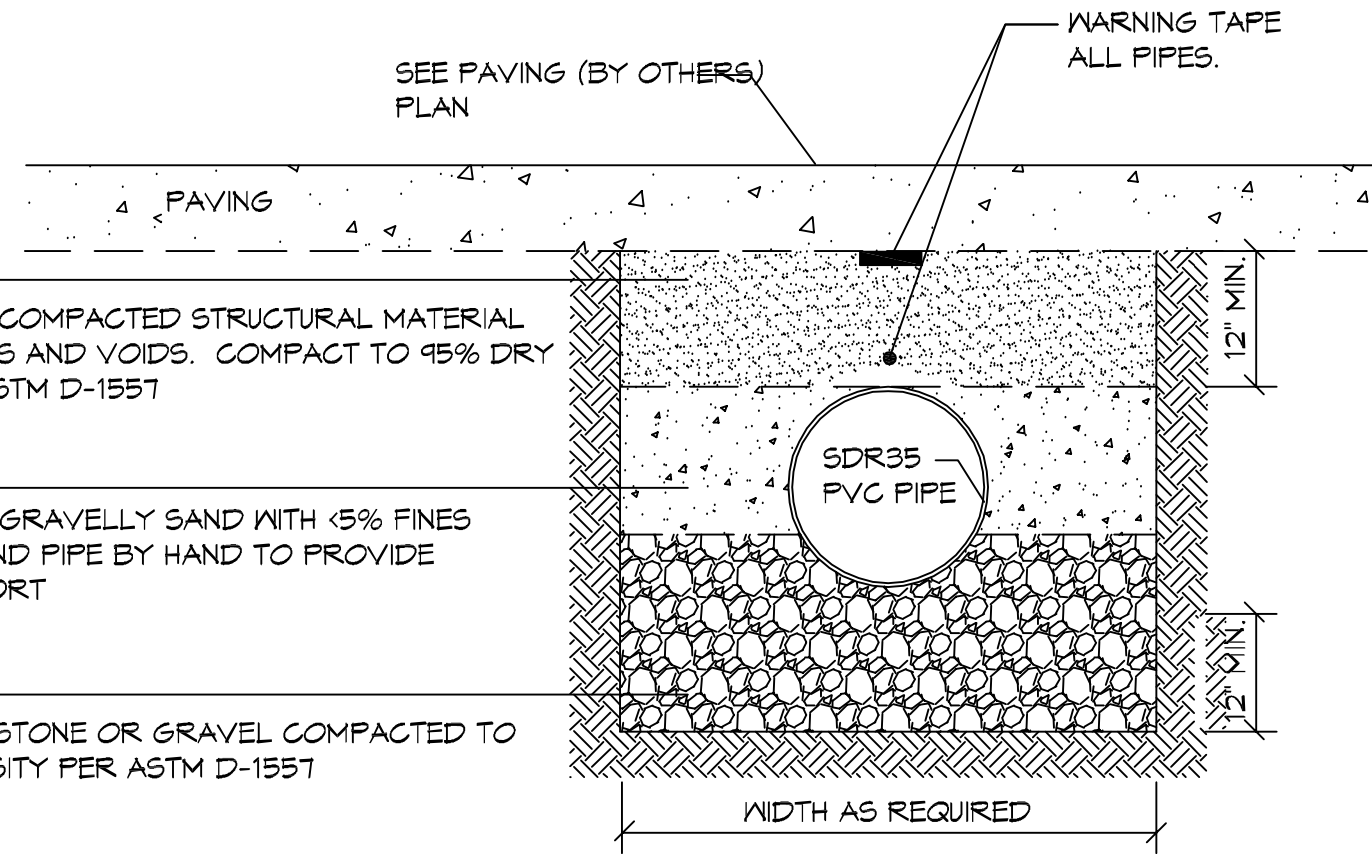

PIPE BEDDING IN PAVING AREA (TYP)

DAMMON
ENGINEERING, INC.



554 Old Spanish Trail Suidell, LA 70458 (985) 649-5832

dammonengineering.com
info@dammonengineering.com
PHONE: 985-649-5832

CHIEF ENGINEER: BRIAN A. MISTICH, P.E.
554 OLD SPANISH TRAIL
SUIDELL, LA 70458

DRAINAGE ANALYSIS FOR THE
EL PASO MEXICAN RESTAURANT
200 WEST GLORIA SWITCH ROAD
CARENCRO, LA 70520

JOB No:	2269	DATE:	4/2/2020
DRAWN BY:	DD	CHECKED BY:	BAM

C1.4.3

1 PIPE BEDDING SECTIONS (TYP)

SCALE: 1"=1'-0"