

Indoor Architectural Products

Rustic Collection


Material: As noted in tables

Finish: Textured powder-coated flat black paint

Installation:

- Use all specified fasteners; see General Notes

Codes: See p. 14 for Code Reference Key Chart

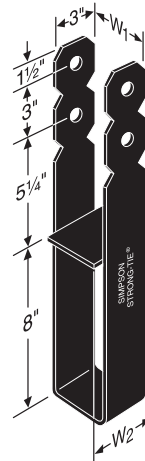

OCB (3 ga.)

1. Allowable loads have been increased 60% for wind or earthquake loading with no further increase allowed; reduce where other loads govern.
2. Minimum side cover for full loads is 3" for CBs.
3. Install with bottom of base flush with concrete.
4. Post bases do not provide adequate resistance to prevent members from rotating about the base and therefore are not recommended for non-top-supported installations (such as fences or unbraced carports).


Column Bases

Model No.	Ga.	Dimensions (in.)		Bolts		Allowable Uplift Loads (160)	Code Ref.
		W1	W2	Qty.	Dia.		
OCB44	3	3 3/16	3 1/2	2	5/8"	4,200	170
OCB46	3	3 3/16	5 1/2	2	5/8"	4,200	
OCB48	3	3 3/16	7 1/2	2	5/8"	4,200	
OCB66	3	5 1/2	5 1/2	2	5/8"	4,200	
OCB68	3	5 1/2	7 1/2	2	5/8"	4,200	
OCB88	3	7 1/2	7 1/2	2	3/4"	6,650	
OCB810	3	7 1/2	9 1/2	2	3/4"	6,650	

Column Caps

Model No.	Ga.	Dimensions (in.)				Bolts				Allowable Loads		Code Ref.
		W1	W2	L	H	Beam		Post		Uplift (160)	Down (100)	
						Qty.	Dia.	Qty.	Dia.			
OCC44	3	3 3/8	3 3/8	9	4 1/2	2	5/8"	2	5/8"	1,465	15,310	170
OCC46	3	3 3/8	5 1/2	12	7 1/2	4	5/8"	2	5/8"	2,800	24,060	
OCC66	3	5 1/2	5 1/2	12	7 1/2	4	5/8"	2	5/8"	4,040	30,250	
OCC68	3	5 1/2	7 1/2	12	7 1/2	4	5/8"	2	5/8"	4,040	37,810	
OCC88	3	7 1/2	7 1/2	15	7 1/2	4	3/4"	2	3/4"	7,440	54,600	

1. Allowable uplift loads have been increased 60% for wind or earthquake loading with no further increase allowed; reduce where other loads govern.
2. Downloads are determined by nominal sawn beam allowable bearing at 625 psi on seat area; reduce where shear value of beam, end bearing value of post, L/R of post, or other criteria are limiting.
3. Post sides are assumed to lie in the same vertical plane as the beam sides.
4. For end conditions, specify OECC.

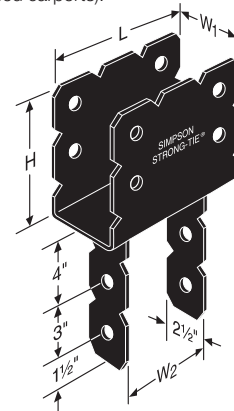

OCC (3 ga.)

Beam-to-Column Ties

Model No.	Ga.	Dimensions (in.)			Minimum Bolt End and Edge Distances (in.)		Bolts		Allowable Loads ^{1,2,3}		Code Ref.
		W	H	L	d1	d2	Qty.	Dia.	Tension/Uplift	F1	
									(100/160)	(100/160)	
OL	12	2	12	12	2	3 1/2	5	1/2"	1,435	565	170
OHL	7	2 1/2	12	12	2 1/2	4 3/8	5	5/8"	1,535	565	
OT	12	2	12	12	2	3 1/2	6	1/2"	2,585	815	
OHT	7	2 1/2	12	12	2 1/2	4 3/8	6	5/8"	2,585	815	

1. OL, OHL, OT and OHT must be installed in pairs with machine bolts in double shear. A single part with machine bolts in single shear is not load rated.
2. Allowable loads are based on a minimum member thickness of 3 1/2".
3. OT, OHT loads assume a continuous beam.

