


Rear


Sides

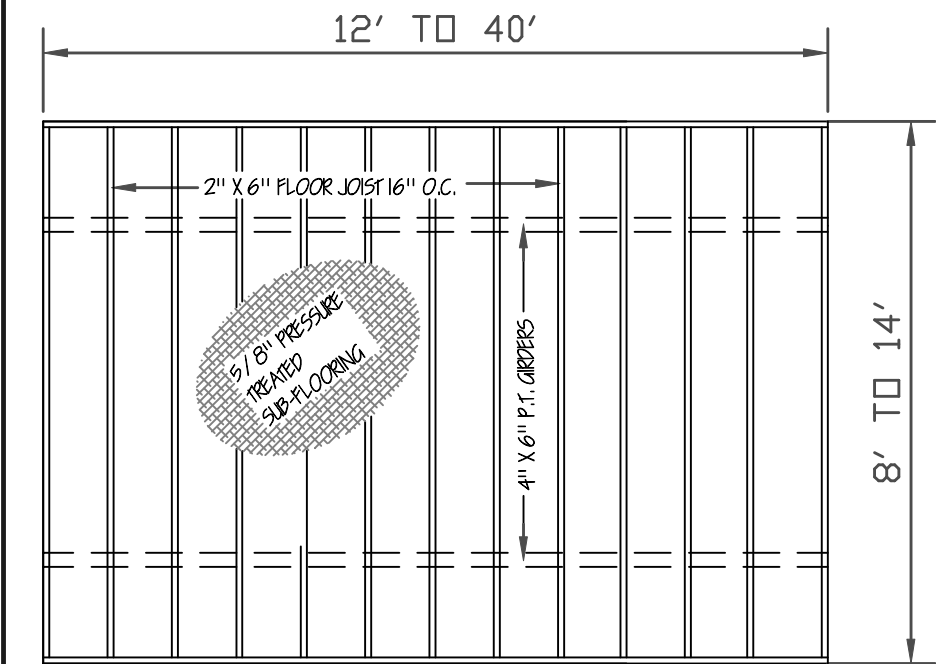


FLOOR FRAMING

ANCHORS: IRON ROD DOUBLE
HELIX EARTH ANCHORS, 30" LONG BY 3/4" W/
2-4" HELIX FOR SOIL CLASS 2"
1-1/4" FRAME TIE GALVANIZE STRAP WITH BUCKLE
AND SLOTTED BOLTS CENTERED BETWEEN EACH PIER

GIRDERS: TWO REQUIRED FOR 8'
and 10' BUILDINGS AND FOUR
REQUIRED FOR 12', 14' and 16'
BUILDINGS.

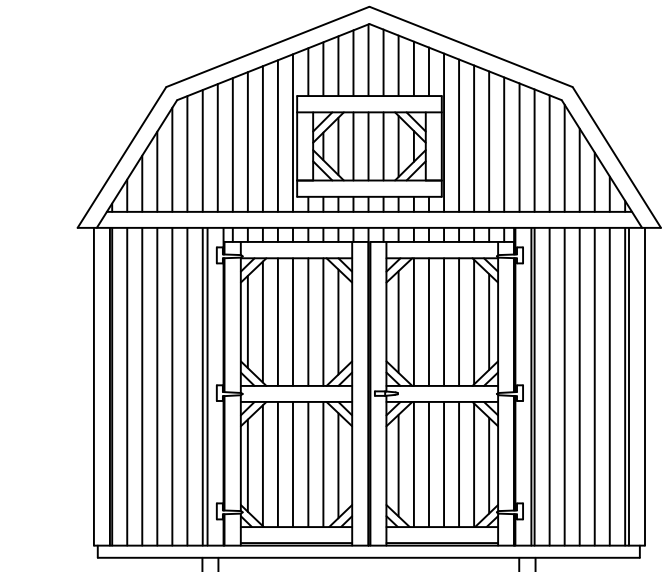

Front

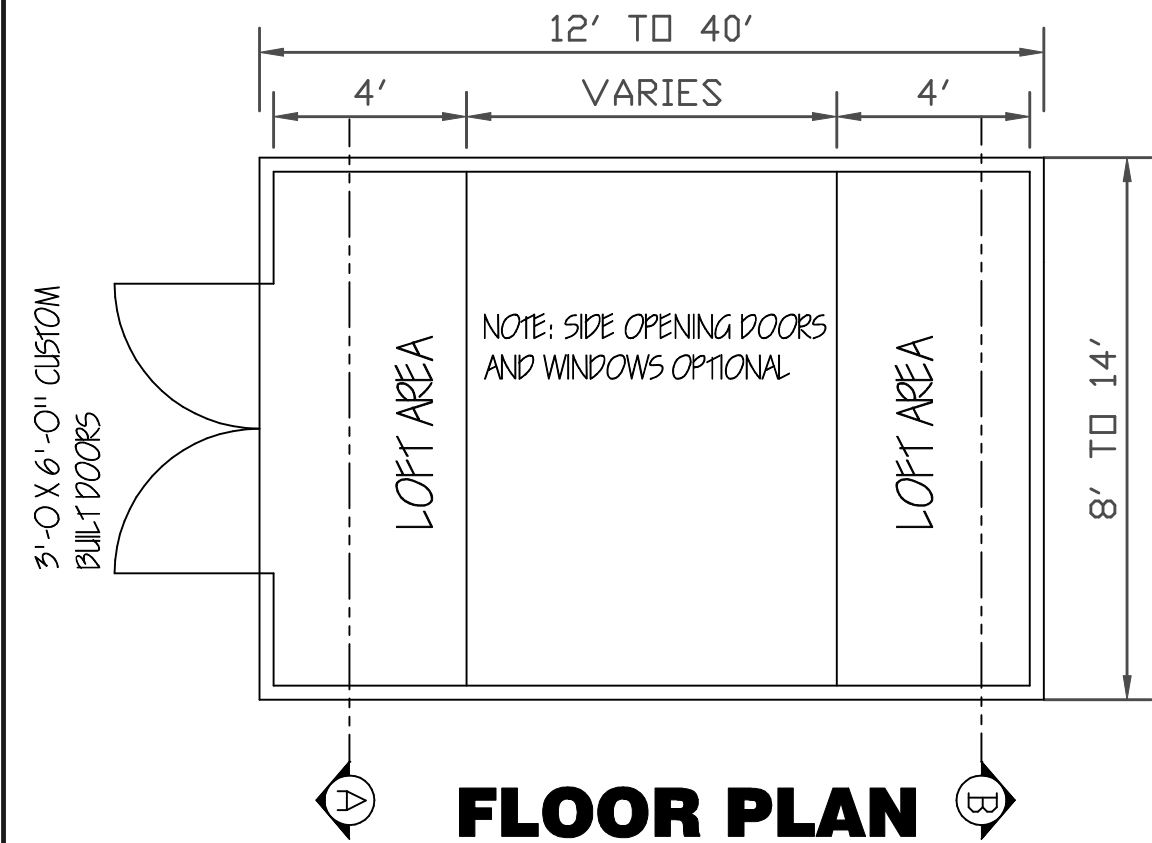

FLOOR PLAN


MEASURES SHALL BE TAKEN DURING CONSTRUCTION
TO INSURE THAT ONLY WORKMANSHIP OF THE HIGHEST QUALITY
IS PERFORMED AND THAT ONLY THE BEST MATERIALS AND
PRACTICES OF CONSTRUCTION ARE USED FOR A QUALITY AND
SOUND BUILDING.
BUILDINGS 14'-0" AND 16'-0" WIDE, STUDS
16" O.C.

NOTE: THE UTILITY FLOORING, WALLS AND ROOF
ARE DESIGNED TO COMPLY WITH THE 2003, 2006
AND 2009 INTERNATIONAL BUILDING AND
INTERNATIONAL RESIDENTIAL CODES. THEY ARE NOT
INTENDED FOR RESIDENTIAL USE. FOR RESIDENTIAL
USAGE 'ALL' STATE AND LOCAL CODES MUST BE MET
INCLUDING BUT NOT LIMITED TO SIZES, OPENINGS,
CEILING HEIGHTS, ELECTRICAL, PLUMBING ETC.

ENGINEERS' NOTES:
1. FOUNDATIONS PIERS, TIE-DOWNS AND ANCHORS
SHALL MEET THE REQUIREMENTS OF THE
"PERMANENT FOUNDATIONS GUIDE OF
MANUFACTURED HOUSING" AS PUBLISHED BY HUD
IN SEPTEMBER 1996, AND THE HUD HANDBOOK
4145.1 REV. 2.
2. NO FIELD SUPERVISION PROVIDED UNDER THIS SEAL.
3. NO ADMINISTRATION PROVIDED UNDER THIS SEAL.

Lofted Barn

WIND CERTIFICATION
WIND EXPOSURE CATEGORY 'C'
BASIC WIND SPEED (3 SECOND GUST) 150 M.P.H.
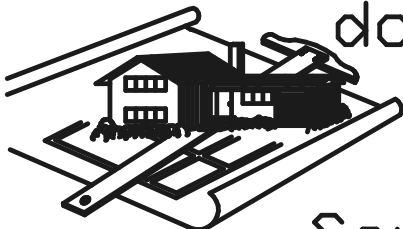
<p>DAMMON ENGINEERING 1095 FLORIDA AVE. SLIDELL, LOUISIANA</p> <p>985 - 649 - 5832</p>	 <p>doug's plan Service</p> <p>4210 Stewart Lane Perdido, MS 39573 228/235-5259</p>	<p>GRACELAND PROPERTIES LLC P.O. BOX 665 CUNNINGHAM, KY 42035 601 - 799 - 4545</p> <p>Copyright (C) 2008 by Graceland Properties LLC All Rights Reserved, including the rights of reproduction in whole or in part in any form.</p>
--	--	--