



DS9 A

CONSTRUCTION

The luminaire has a luminaire base/ballast housing and an octagonal lens frame with hinged roof. The luminaires are available with a large variety of base styles to select from. All base/ballast housings, lens frames, roofs and finials are cast aluminum. The frames and luminaire bases are one-piece construction without field assembly. Lenses are clear, smooth acrylic. All hardware is stainless steel.

INSTALLATION

The luminaire mounts on a 3" O.D. x 3" tall tenon with six, 1/4-20 socket set screws. The roof is hinged providing easy access to the lamp and ballast assembly. The ballast is easily accessible by removing the ballast plate. The ballast and socket assembly is furnished with a quick disconnect plug.

OPTICS

The luminaire utilizes a high performance reflector that is hydroformed, highly reflective and anodized with a Type V distribution, for use with a vertical lamp. Luminaire is furnished with an H.I.D. ballast and socket assembly. Luminaire is UL listed and labeled as suitable for wet locations. Sockets are glazed porcelain, medium base, with a copper alloy nickel-plated screw shell and center contact. Ballasts are core and coil, high power factor, regulating type.

FINISH

The luminaire has a powder coat finish utilizing a premium TGIC polyester powder. The finish is a three-stage process which consists of drying, powder application and curing. Before coating, the parts are treated with a five-stage pretreatment process, consisting of a heated alkaline cleaner, rinse, phosphate coating, rinse and sealant.

ANTIQU[®] Street Lamps™


An **Acuity** Brands Company

2011-B W. Rundberg Lane • Austin, TX 78758
ph. (800)410-8899 • fax (512)977-9622
www.antiquestreetslamps.com
Acuity Brands Lighting


DS9 Cutoff Luminaire

DS9 WITH LUMINAIRE BASE CHOICE

* bd dimensions are the diameter at the base

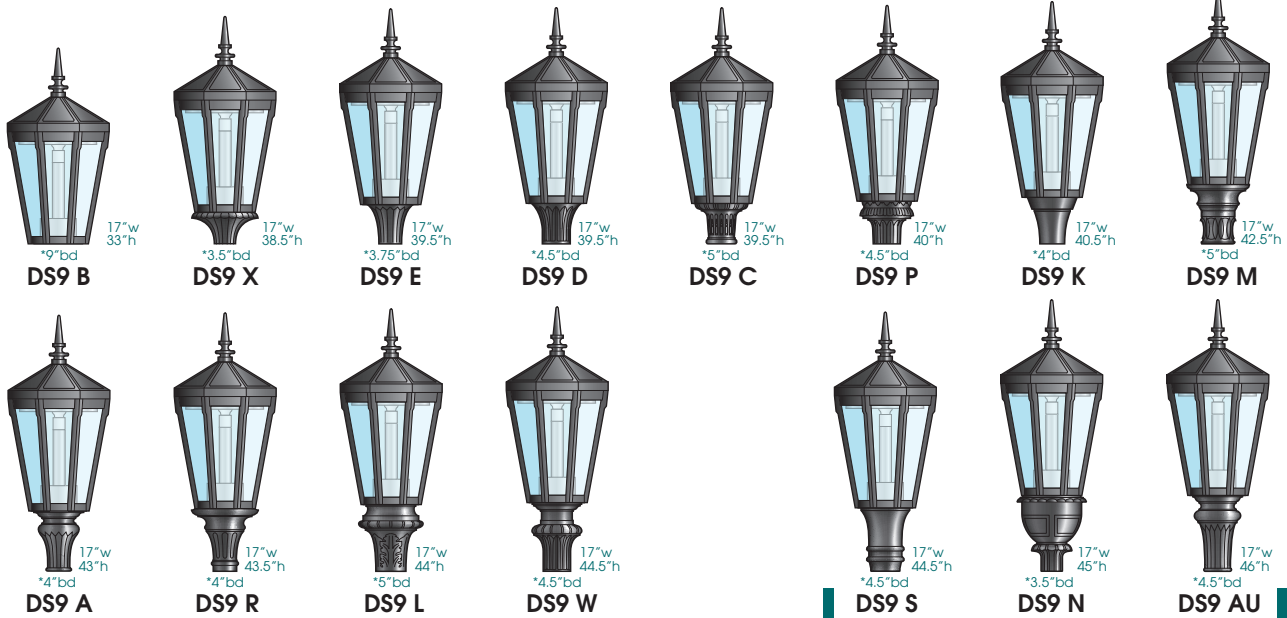

Twist & Lock photoelectric cell options available with luminaire bases S, N and AU only.

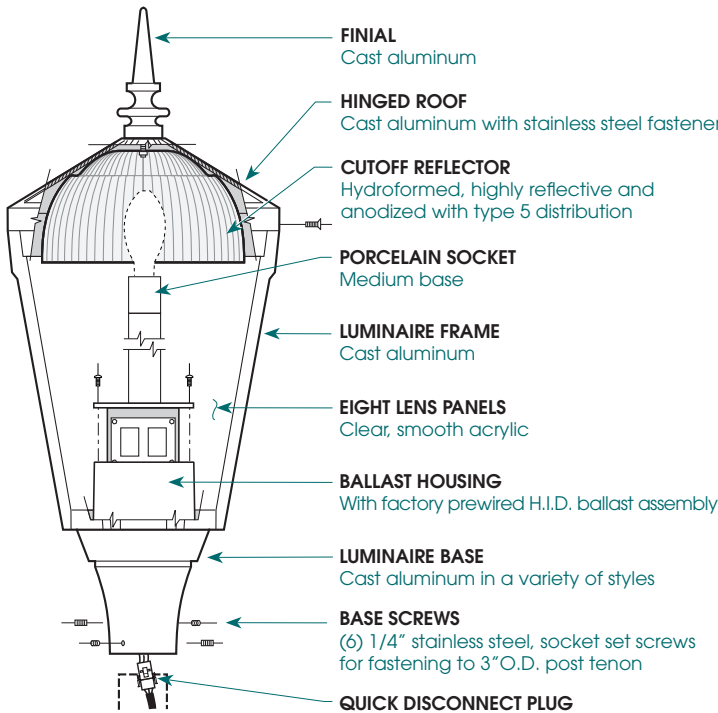

Note: Lamp is not furnished with the luminaire.

ORDERING GUIDE

Sample Catalog no: DS9 150S MED ACS TY5 TB1 PEB1 ANBK

| Series | Wattage/Lamp | Lens Material | Distribution | Voltage ¹ | Options | Finish ³ |
|---------------------|---|--------------------------------|--------------------------------|--|---|--|
| DS9 B | Metal Halide 50M MED 70M MED 100M MED 150M MED | ACS Acrylic Clear Smooth | TY5 IES Distribution type 5 | TB1 120 volt TB2 208 volt TB3 240 volt TB4 277 volt 347 347 volt 480 480 volt | SF Single Fusing DF Double Fusing PEB1 Photoelectric cell button 120v PEB2 Photoelectric cell button 208, 240, 277v PER ² Twist-Lock Photocontrol Receptacle PE1 ² NEMA Twist & Lock PE 120, 208, 240v PE3 ² NEMA Twist & Lock PE 347v PE4 ² NEMA Twist & Lock PE 480v PE7 ² NEMA Twist & Lock PE 277v | ANBK Black ANDB Dark Bronze ANDG Dark Green ANPP Prime Painted CM Custom Match CS Custom Select RAL colors |
| DS9 X | | | | | | |
| DS9 E | | | | | | |
| DS9 D | | | | | | |
| DS9 C | | | | | | |
| DS9 P | High Pressure Sodium 35S MED 50S MED 70S MED 100S MED 150S MED | | | | | |
| DS9 K | | | | | | |
| DS9 M | | | | | | |
| DS9 A | | | | | | |
| DS9 R | | | | | | |
| DS9 L | | | | | | |
| DS9 W | | | | | | |
| DS9 S ² | | | | | | |
| DS9 N ² | | | | | | |
| DS9 AU ² | | | | | | |

NOTES:
1. Multi-tap Ballast (120, 208, 240, 277v), (120, 277, 347v in Canada).
For wattages under 70S or 70M contact ASL for voltage availability.
2. Twist & Lock Photo Control only available with N, S, and AU bases.
3. For finish and color options, see Finish section in catalog or contact ASL.

ANTIQUE Street Lamps[®]
An AcuityBrands Company