
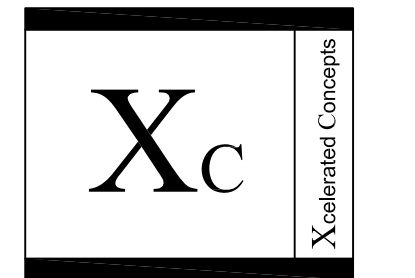


NEW WORK PLAN NOTES

1. NEW SOLID SURFACE COUNTERTOP AND TRAY SLIDE OVER EXISTING STAINLESS STEEL BASE CABINET PER DETAIL 2/SCH-2. NEW LAMINATED PANELS TO BE APPLIED TO FACE (GLUE AND SCREW FROM BEHIND) OF EXISTING BASE. RE-INSTALL AND RECONNECT EXISTING DROP IN EQUIPMENT. INSTALL NEW OWNER SUPPLIED SNEEZE GUARDS (PROVIDE JBOX IN CABINET FOR HEAT LAMP KIT IN SNEEZE GUARD).
2. REPLACE EXISTING TRAY/SILVERWARE DISPLAY.
3. RELAMINATE EXISTING COLUMNS WITH STAINLESS STEEL CORNER GUARDS - SEE DETAIL 1/SCH-2.
4. NEW SERVICE COUNTER PER DETAIL 3/SCH-2.
5. EXISTING EQUIPMENT TO REMAIN.
6. RELOCATE EXISTING PIZZA OVEN (208V, 26.4A). STACK NEW PIZZA OVEN ON EXISTING (208V, 32A).
7. NEW WARMING TRAY IN EXISTING CABINET (120V, 95KW). NEW SNEEZE GUARD W/INTEGRAL LIGHTING (JBOX IN CABINET BASE FOR LIGHTS - 120V).
8. NEW TRACK LIGHTING ABOVE COUNTER, REUSE EXISTING TRACK JBOX. RELAMINATE EXISTING SOFFIT.
9. NEW DROP IN HOT PAN (208V, 12.3A/3 ϕ INDIRECT WASTE). NEW SNEEZE GUARD W/INTEGRAL LIGHTING (JBOX IN CABINET BASE FOR LIGHTS - 120V).
10. NEW DROP IN REFRIGERATED PAN (120V, 9.8A/3 ϕ INDIRECT WASTE)
11. NEW REFRIGERATED DELI CASE (2 DIRECT CONNECTIONS, 1 @ 120V, 8A; 1 @ 120V, 15A - SECOND LOAD IS GENERAL PURPOSE RECEPTACLE).
12. THIS AREA TO BE NEW SUBWAY SANDWICH. ALL CASEWORK TO BE PROVIDED BY OWNER, RECEIVE & INSTALL BY GC. FRONT COUNTER POWER 3 CIRCUITS @ 120V, 20A. BACK COUNTER (BACK WALL) 2 CIRCUITS @ 208V, 30A (NEMA 6-30P) & 1 CIRCUIT @208V, 30A. WATER & DRAIN (WILL WORK AROUND EXISTING).
13. RELOCATE EXISTING AIR SCREEN (OPEN AIR) REFRIGERATED MERCHANDISERS.
14. RELOCATE EXISTING REACH-IN COKE SUPPLIED DISPLAY REFRIGERATORS.
15. NEW CASHIER STAND - PROVIDE 120V, 20 QUAD OUTLET W/DEDICATED CIRCUIT IN CABINET AND CONDUIT FOR DATA LINE.
16. EXTENT OF NEW VINYL FLOOR
17. NEW EXHAUST HOOD (2300 CFM/14" X 15" DUCT COLLAR). OWNER TO SUPPLY HOOD AND EXTINGUISHING SYSTEM, GC TO RECEIVE, HANG HOOD AND PROVIDE EXHAUST FAN AND ALL EXHAUST DUCTWORK.
18. NEW CEILING TILE AND FLUORESCENT LIGHTS THIS AREA (EXISTING GRID TO BE REUSED)
19. NEW DROP-IN HOT/COLD WELL AND SNEEZE GUARD (120V, 16.7A).
20. RELOCATE EXISTING ELECTRIC GRIDDLE.
21. NEW REACH-IN REFRIGERATOR (120V, 6.9A).
22. NEW BACK COUNTER PER DETAIL ----- WITH DROP IN SINK (1/2" HOT AND COLD WATER, 1' DIRECT WASTE)
23. NEW MOBILE HEATED CABINET (120V, 18A).
24. REPLACE EXISTING COUNTER PER DETAIL 3/SCH-2. REINSTALL EXISTING EQUIPMENT.
25. NEW BEVERAGE COUNTER PER DETAIL 4/SCH-2. REUSE EXISTING WATER/DRAIN/POWER/SODA LINES. REROUTE SODA LINES ON WALL INSIDE NEW AIR CHASE AND CUT HOLE THROUGH TO NEW BEVERAGE COUNTER BASE.
26. NEW WALL WITH LOUVRE SIZED TO PROVIDE ADEQUATE AIR TRANSFER.
27. NEW SERVICE COUNTER PER DETAIL --/SCH-2.
28. NEW DROP IN COLD WELL (120V, 9.8A/3 ϕ INDIRECT WASTE)
29. NEW DROP IN HOT WELL (208V, 20.4A/3 ϕ INDIRECT WASTE)
30. NEW BEVERAGE COUNTER PER DETAIL 4/SCH-2. REROUTE SODA LINES TO THIS LOCATION PROVIDE LAMINATED CHASE AT FAR RIGHT CORNER OF CABINET FOR SODA LINES TO COME DOWN THROUGH CEILING INTO CABINET. POWER AT 45" AFF FOR BEVERAGE EQUIPMENT. WATER STUB OUT IN CABINET BASE FOR BEVERAGE EQUIPMENT, REUSE EXISTING DRAIN.

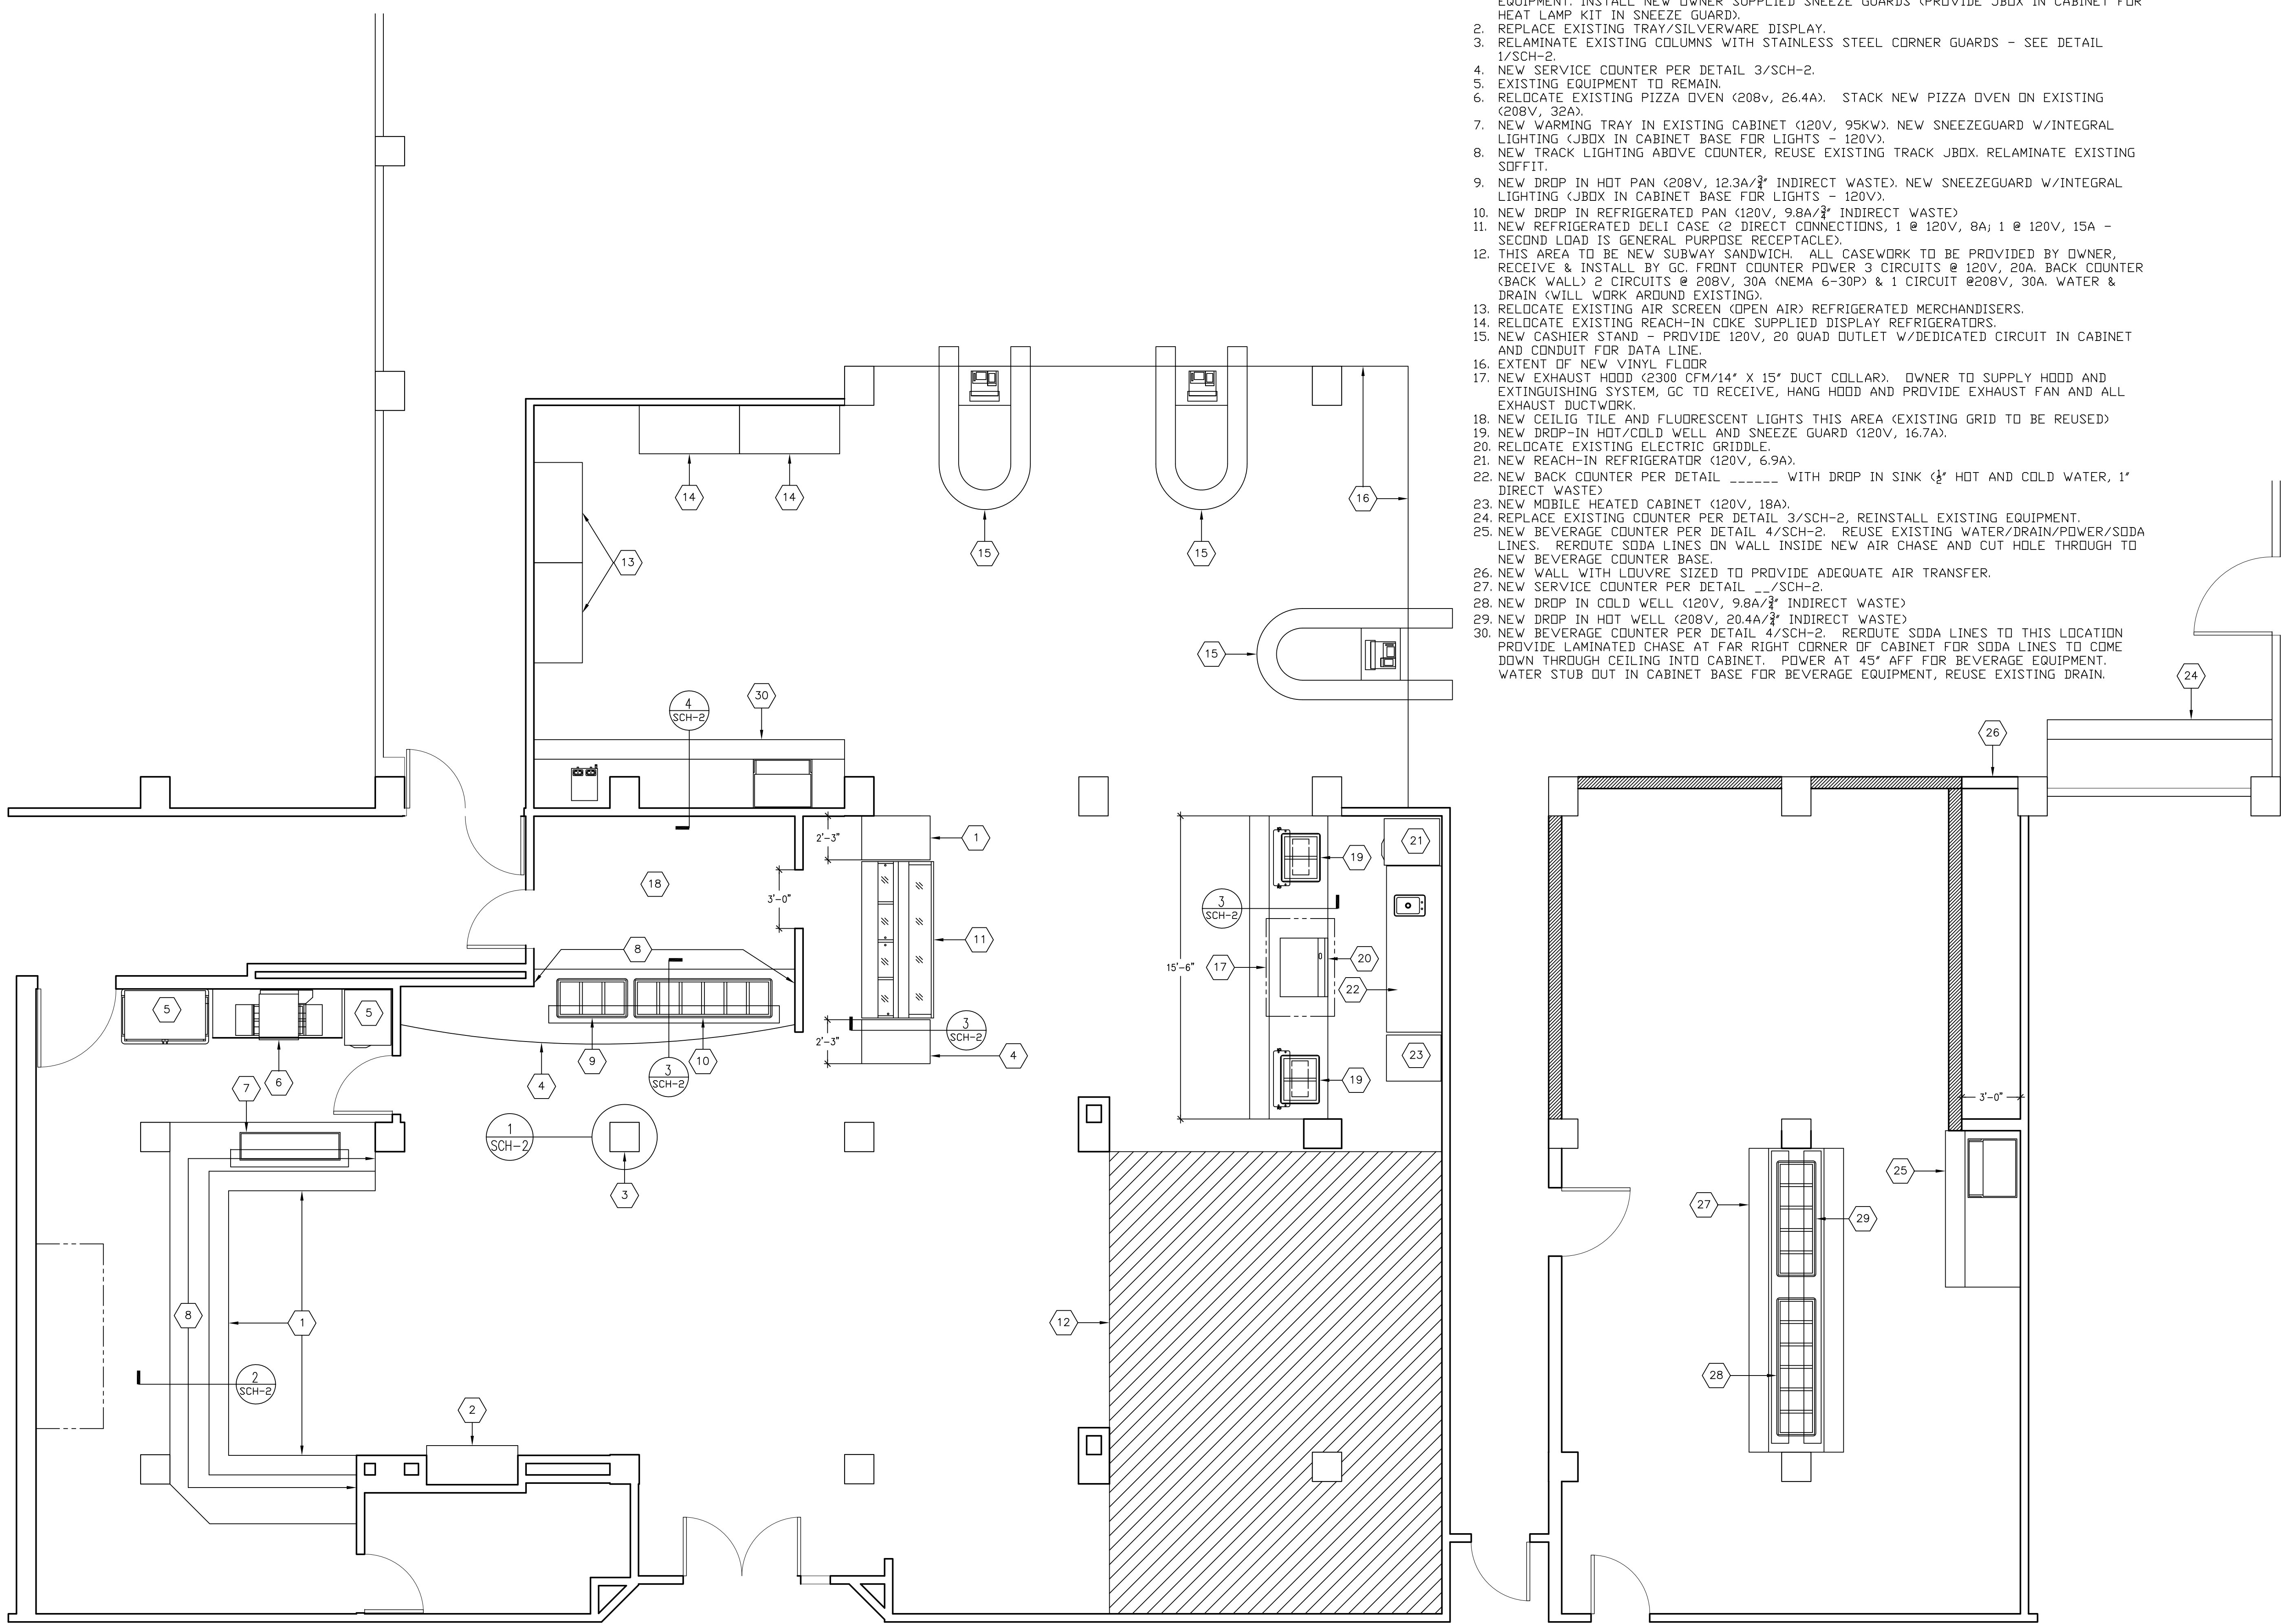

Xcelerated Concepts, LLC
 111 Mill St. Suite 1-S
 Danville, PA 17821
 T 570.275.6130 F 570.275.6841


WEST JEFFERSON MEDICAL CENTER
 MARRERO, LOUISIANA 70072

Client:
SODEXO HEALTHCARE SERVICES
 WEST JEFFERSON MEDICAL CENTER
 1101 MEDICAL CENTER BOULEVARD
 MARRERO, LOUISIANA 70072

Consultant:

SEAL:

KEY PLAN:

	
SCHEMATIC DESIGN	11/09/09

PROJECT NO.: XXXX
 DRAWN BY: JS
 CHECKED BY: NAME
 SCALE: X/X"=1'-0"

DRAWING TITLE:
SCHEMATIC PLAN

SHEET NO.:
SCH-1