

BALCONY AREA:  
 BALCONY 1,438 SQ. FT.  
 ATTIC 2,650 SQ. FT.  
 TOTAL 4,088 SQ. FT.

BALCONY PLAN  
 SCALE: 1/8"=1'-0"



NOTE  
 ALL METAL EXTERIOR DOORS SHALL MEET  
 130 MPH WIND LOAD SPECIFICATIONS.

QTY/NO.	SIZE	TYPE	FRAME	HINGE	LOOK	ACCESSORIES	RATINGS	REMARKS
2	1	62	3/0 X 6/8 BR					
2	2	3/0 X 6/8						
1	3	3/0 X 6/8						
2	4	3/0 X 6/8						
2	5	3/0 X 6/8						
1	6	3/0 X 6/8						
1	7	3/0 X 6/8						
1	8	3/0 X 6/8						
1	9	3/0 X 6/8						
1	10	3/0 X 6/8						
1	11	3/0 X 6/8						
1	12	62	2/0 X 6/8					
1	13	2/0 X 6/8						
1	14	2/8 X 6/8						
1	15	6/0 X 6/8						
1	16	6/0 X 6/8						
1	17	6/0 X 6/8						

NAME	FLOOR	BASE	WALL	CEILING	REMARKS
FOYER					
CONFERENCE					
CLASS. MINISTER					
CLASS. OFFICE					
LIBRARY / COPY					
PASTOR'S STUDY					
RESTROOMS					
CONFERENCE ROOM					
LAUNDRY					
LIBRARY ROOM					
AMTROR					
HANDBASKET					
ANTE ROOM					
REST ROOM					
REAR STORAGE					
WASH ROOM					
BURGLAR STAIRS					
BURGLAR ROOM					
CHANGE ROOMS					
CHANGE ROOM					
FOYER / AUTO RAIL STAIRS					
AUDITORIUM					
OFFICE RESTROOMS					

CONTRACTOR NOTE:  
 EACH CONTRACTOR RESPONSIBLE FOR THE CONSTRUCTION OF A MAIN  
 WIND-FORCE-RESISTING COMPONENT OF THIS BUILDING SHALL SUBMIT A  
 WRITTEN CONTRACTOR'S STATEMENT OF RESPONSIBILITY TO THE BUILDING  
 OFFICIAL AND OWNER PRIOR TO COMMENCEMENT OF THE WORK ON THAT  
 COMPONENT. (IBC 1706.3)

DETAILED BUILDING REQUIREMENTS  
 (MAIN WIND FORCE RESISTING COMPONENTS)

THE DESIGN, FABRICATION AND ERECTION OF STRUCTURAL STEEL FOR BUILDINGS AND STRUCTURES SHALL BE IN ACCORDANCE WITH EITHER THE AISC LOAD AND RESISTANCE FACTOR DESIGN SPECIFICATION FOR STRUCTURAL STEEL BUILDINGS (AISC-LRFD), AISC SPECIFICATION FOR STRUCTURAL STEEL BUILDINGS-ALLOWABLE STRESS DESIGN (AISC-ASD) OR AISC SPECIFICATION FOR THE DESIGN OF STEEL HOLLOW STRUCTURAL SECTIONS (AISC-HSS). WIND LOAD DESIGN OF 130 MPH.

ROOF COVERING HAS BEEN DESIGNED IN ACCORDANCE WITH THE REQUIREMENTS SET FORTH IN IBC SECTION 1507

MASONRY VENEER HAS BEEN DESIGNED IN ACCORDANCE WITH THE REQUIREMENTS SET FORTH IN IBC CHAPTER 21

VINYL SIDING SHALL CONFORM TO THE REQUIREMENTS OF ASTM D3679 (IBC 1404.9)

1609.1.4 PROTECTION OF OPENINGS

7/16" THICK STRUCTURAL WOOD PANELS AND ATTACHMENT HARDWARE SHALL BE PROVIDED FOR BUILDING OCCUPANCY THE PANELS SHALL BE NUMBERED FOR EACH GLAZED OPENING AND SHALL BE STORED ON SITE PERMANENTLY (IBC 1609.1.4, EXCEPTION)

ROOM FINISH SCHEDULE


DOOR & HARDWARE SCHEDULE

QTY/NO.	SIZE	TYPE	FRAME	GLASS	LITES	ACCESS.	REMARKS
22	A	3/0 X 6/8					
4	B	3/0 X 6/8					
4	C	3/0 X 6/8					
3	D	6/0 X 7/0					
48	E	3/0 X 3/0					
3	F	62	3/0 X 3/0				
1	G	6/0 X 3/0 X 1/4"					

WINDOW SCHEDULE

TYPE	FRAME	GLASS	LITES	ACCESS.	REMARKS
FIXED					
VERT. SLIDE					
HORIZ. SLIDE					
CIRCLEHEAD					
STEEL					
VINYL					
WOOD					
ALUMINUM					
TINTED					
FLAN					
INSULATED					
WTRD GLASS					
ALUM. PHLS.					
2/2					
15 LITES					
9 LITES					
NONE					
SCREEN					
SHUTTER					
NONE					
ALARM					
LOCK					
MAX. U-FRACTOR					

WINDOW SHAKES W/ REMOTE OPERATOR  
 FROSTED GLASS W/ SHAKES  
 BRONZED ALUMINUM SHEET PANELS  
 1" X 4" SHELF UNDERNEATH WINDOW  
 FLECKGLASS, 12" X 1" TELLER OPENING AT BOTTOM OF WINDOW

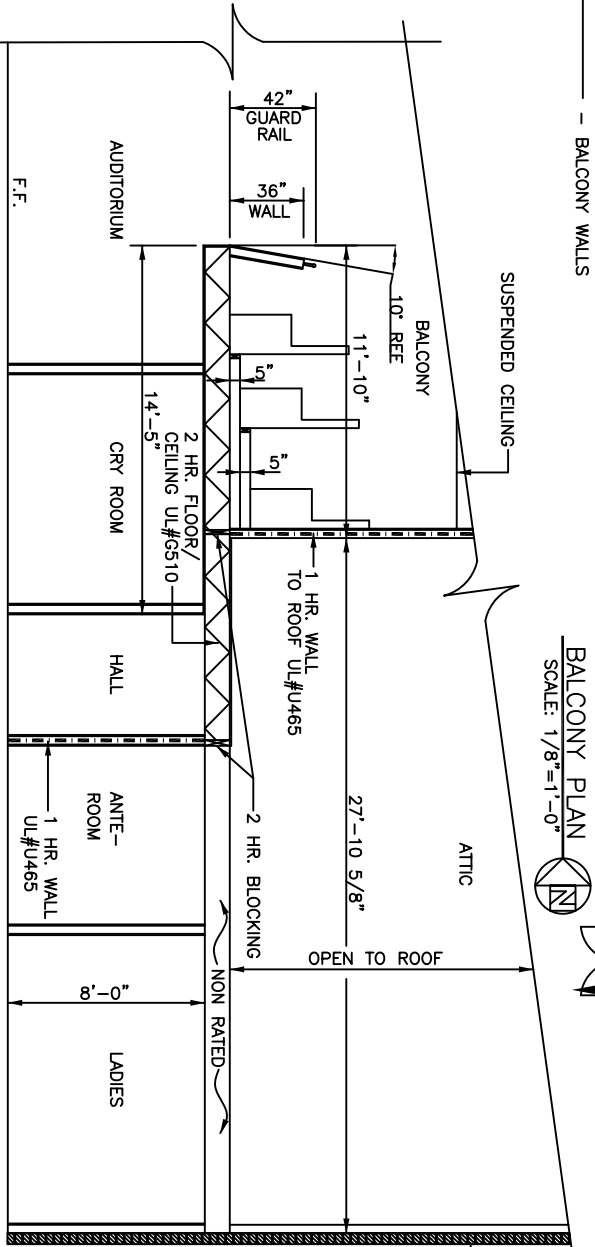

SECTION  
 N.T.S.



NEW SANCTUARY

**DAMMON ENGINEERING, INC.**

1095 FLORIDA AVENUE 985-649-5832 SLIDELL, LA. 70458  
 DAMMONENGINEERING.COM

SECOND LEVEL PLAN VIEW

STARLIGHT BAPTIST CHURCH  
 2100 SECOND STREET  
 SLIDELL, LOUISIANA

SCALE: AS NOTED

FILE:

JOB NO. 1495d

DATE: 05-16-05

SHEET

A-2

OF