

FEATURES & SPECIFICATIONS

INTENDED USE — LBL LED wraparound provides a digital lighting platform to deliver general ambient lighting for surface-mount applications. The LED system delivers long life and excellent color to ensure a quality, low-maintenance lighting installation. Ideal for closets, storage rooms, hallways, and offices.

CONSTRUCTION — Metal parts are die formed from code-gauge steel. Prismatic diffuser is 100% acrylic with sonically welded luminous ends. Continuous side flanges on fixture body provide light trap and continuous diffuser support to prevent accidental opening and simplify maintenance.

Finish: Five-stage iron phosphate pretreatment assures superior paint adhesion and rust resistance.

Painted parts finished with high-gloss, high-reflectivity baked white polyester enamel (low VOC).

OPTICS — Curved prismatic diffuser with linear side prisms and highly transmissive overlay minimizes lamp image and provides high-angle brightness control. Luminous end plates soften appearance for improved aesthetics.

ELECTRICAL — Long-life LEDs, coupled with high-efficiency drivers, provide extended service life. 90% LED lumen maintenance at 60,000 hours (L90/60,000).

LED drivers deliver dimming from 0-10V control signal.

LISTINGS — CSA certified to U.S. and Canadian standards. Damp listed.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

WARRANTY — 5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Catalog Number
Notes
Type

Contractor Select

LBL LED Low-Profile Curved-Basket LED Wraparound

2' and 4'
LED



Specifications


Length: 24 (61.0)

48 (122.0)

Width: 10 (25.4)

Depth: 2-3/4 (7.0)


All dimensions are inches (centimeters) unless otherwise indicated.



MOUNTING DATA

Individual Installation —
Two single-stem hangers required.

Row Installation —
One hanger per fixture plus one row required.

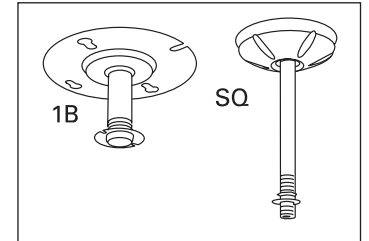

See LBL Configurable specification sheet for additional lumen packages and control options.

ORDERING INFORMATION

Catalog number	UPC	Description	Lumens	Color temperature	Lens type	Voltage	Wattage ²	Pallet qty	Standard carton qty.
LBL2 LP835 ¹	753573917564	2' LED Wraparound	2,248	3500 K	Patterned #12 acrylic	120-277	23	112	1
LBL2 LP840 ¹	753573917595	2' LED Wraparound	2,267	4000 K	Patterned #12 acrylic	120-277	23	112	1
LBL4 LP835 ¹	753573917601	4' LED Wraparound	4,564	3500 K	Patterned #12 acrylic	120-277	41	56	1
LBL4 LP840 ¹	753573917632	4' LED Wraparound	4,600	4000 K	Patterned #12 acrylic	120-277	41	56	1
LBL4 347 LP835	753573917649	4' LED Wraparound	4,564	3500 K	Patterned #12 acrylic	347	41	56	1
LBL4 347 LP840	820476010279	4' LED Wraparound	4,600	4000 K	Patterned #12 acrylic	347	41	56	1


Notes

1. Product in stock.
2. All values are design or typical values, measured under laboratory conditions at 25°C.

LBL Low Profile LED Wraparound

PHOTOMETRICS

LBL2 LP840, 2266.8 delivered lumens, test no. LTL27384P5, tested in accordance to IESNA LM-79.

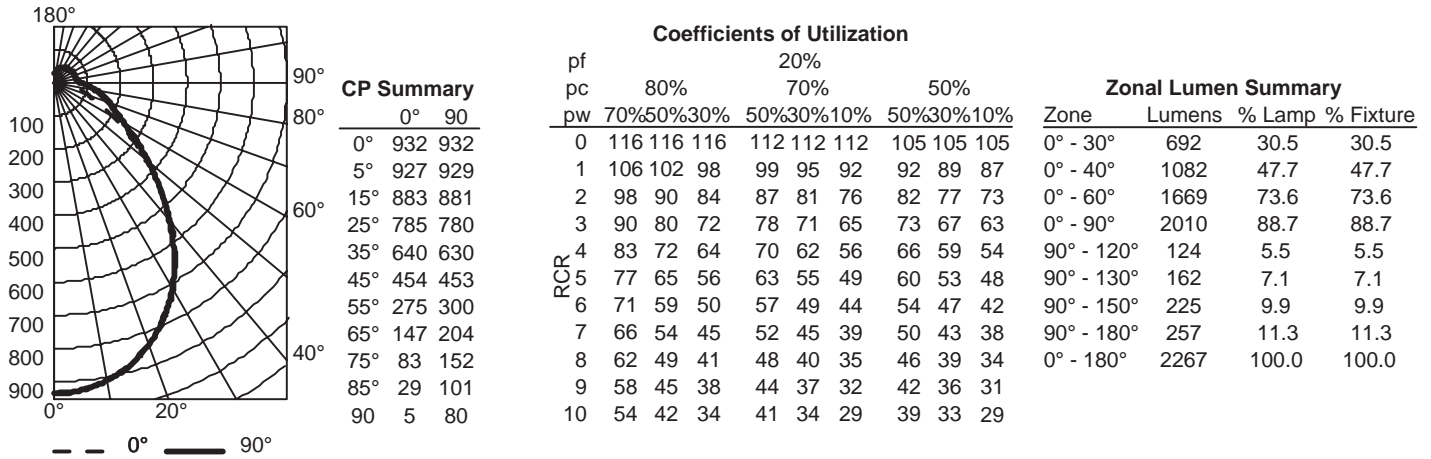

LBL4 LP840, 4600.4 delivered lumens, test no. LTL27386P25, tested in accordance to IESNA LM-79.

