

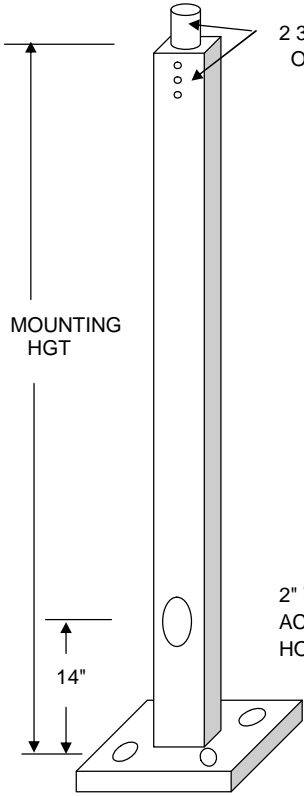


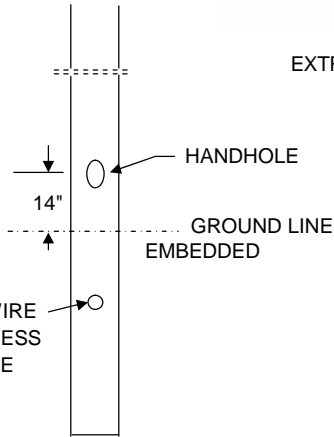


1. SHAFTS ARE ONE SECTION DESIGN FABRICATED FROM A WELDABLE GRADE CARBON STEEL STRUCTURAL TUBING WITH A UNIFORM WALL THICKNESS. MATERIAL SHALL CONFORM TO ASTM A-500 GRADE B WITH A MINIMUM YIELD STRENGTH OF 46,000 P.S.I.
2. BASE PLATES ARE CONSTRUCTED OF A STRUCTURAL QUALITY HOT ROLLED CARBON STEEL PLATE WITH A GUARANTEED MINIMUM YIELD STRENGTH OF 36,000 P.S.I.
3. ANCHOR BOLTS ARE "L" BENT BARS HAVING A MINIMUM YIELD STRENGTH OF 55,000 P.S. FURNISHED COMPLETE WITH NUTS AND WASHERS.
4. POLES ARE POLYESTER POWDERCOATED BRONZE.

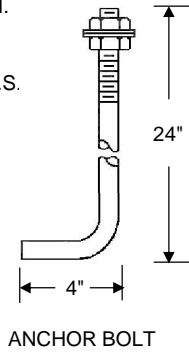

2 3/8" X 4" LONG TENON
OR DRILLED TO MATCH FIXTURE
AS REQUIRED.



QUANTITY		
CATALOG NO.		
POLE	POLE HEIGHT	20'
	TOP DIA.	4"
	BOTTOM DIA.	4"
	GAGE	11 GA
	MOUNTING HT.	20'
ARM	LENGTH	N/A
	EMBEDDED DEPTH	
BASE PLATE	"S"	10"
	BOLT CIRCLE	8"-10"
	BOLE HOLE DIA.	1"
	PLATE THK "T"	.75"
ANCHOR BOLTS	DIA.	.75"
	LENGTH	28"
*INCLUDES FULL BASE COVER		

LYTE POLES INCORPORATED
P.O. BOX 340
EASTPOINTE, MI 48021

SCALE: NONE	APPROVED BY:	DRAWN BY: RGW
DATE: MAY 11, 2003		REVISED:
PROJECT:		
JOB NO.		DRAWING NUMBER 101-4011-20