


MODELS 8663RP & 8664RP DESIGNER EXHAUST FAN/LIGHT



FEATURES

Designer Fan/Light:

- 8663RP - Fan/Light/Night light
- 8664RP - Fan/Light (No night light)

BLOWER:

- Powerful Designer Fan/Lights quietly remove stale, steamy air from bathrooms up to 95 sq. ft. (8.83 m²), other rooms up to 125 sq. ft. (11.61 m²)
- Polypropylene blower wheel performs efficiently with a minimum of sound

GRILLE:

- White polymeric grille impervious to bathroom climate
- Glass lens brightly diffuses 100 watt bulb (bulb sold separately), lens extends 1-5/8" (41 mm) from finished ceiling

HOUSING:

- Galvanized steel housing
- Tapered duct adapter with built-in damper for easy installation to 4" (102 mm) duct
- May be wired for simultaneous or separate fan/light operation
- Includes 7 watt energy-saving night light assembly (8663RP only) (bulb sold separately)
- Suitable for direct contact with thermal insulaton (Type I.C.)

NOTE: Not for use in kitchens

TYPICAL SPECIFICATIONS

Unit shall be NuTone model 8663RP or 8664RP.



Unit's housing shall be constructed of galvanized steel 9" x 9" x 6" (229 mm x 229 mm x 152 mm) with a 4" (102 mm) diameter duct. Includes light assembly for 100W bulb (bulb sold separately) and night light assembly (8663RP) for 7W bulb (bulb sold separately). Grille shall be 15" (381 mm) diameter.

Unit may be wired for simultaneous fan and light operation, or separate fan or light operation. Patented snap-on white polymeric grille assembly included. Not for use in kitchens.

Air delivery shall be no less then 100 CFM (47.2 L/s) and sound levels no greater then 3.5 sones. Unit shall be CSA certified for use in tub and shower enclosures when installed with GFCI branch circuit wiring. All air and sound ratings shall be certified by the HVI. Unit shall be UL listed.

SPECIFICATIONS

MODEL	VOLTS	HZ	AMPS	SONES	CFM (L/s)	DUCT (mm) Rd.
8663RP	120	60	1.9	3.5	100 (47.2)	4" (102)
8664RP	120	60	1.9	3.5	100 (47.2)	4" (102)

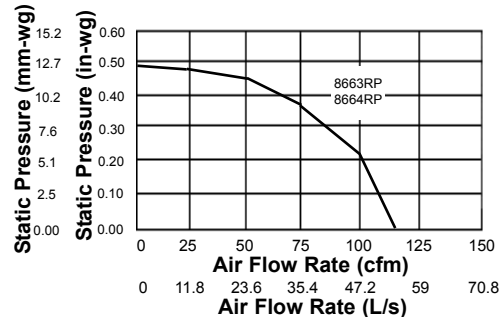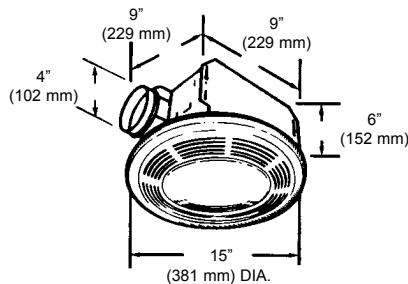

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. (2.54 mm) static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.



NuTone Inc., 4820 Red Bank Road, Cincinnati, OH 45227 (1-800-543-8687)

Broan-NuTone Canada Inc., 1140 Tristar Drive, Mississauga, Ontario, Canada L5T 1H9 (1-888-882-7626)

REFERENCE	QTY.	REMARKS	Project	
			Location	
			Architect	
			Engineer	
			Contractor	
			Submitted by	Date