


**4.6 PARKING AND PASSENGER LOADING ZONES.**

4.6.1 **STREET FRONTAGE.** THE MINIMUM FRONT STREET FRONTAGE OF A BUILDING SHALL BE 100 FEET (30.5 M) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT. THE MINIMUM FRONT STREET FRONTAGE OF A BUILDING SHALL BE 100 FEET (30.5 M) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.

4.6.2 **STREET FRONTAGE.** THE MINIMUM FRONT STREET FRONTAGE OF A BUILDING SHALL BE 100 FEET (30.5 M) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT. THE MINIMUM FRONT STREET FRONTAGE OF A BUILDING SHALL BE 100 FEET (30.5 M) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.

4.6.3 **STREET FRONTAGE.** THE MINIMUM FRONT STREET FRONTAGE OF A BUILDING SHALL BE 100 FEET (30.5 M) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT. THE MINIMUM FRONT STREET FRONTAGE OF A BUILDING SHALL BE 100 FEET (30.5 M) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.



**FIG. 10**  
ACCESS AISLE AT PASSENGER LOADING ZONES

IF X IS LESS THAN 49', THEN THE SLOPE OF THE FLARED SIDE SHALL NOT EXCEED 1:12.



**FIG. 11**  
MEASUREMENT OF CURB RAMP SLOPES

**4.7 CURB RAMPS.**

4.7.1 **GENERAL.** CURB RAMPS SHALL BE CONSTRUCTED TO PROVIDE ACCESS TO THE BUILDING FROM THE STREET TO THE ENTRANCE OF THE BUILDING.

4.7.2 **MINIMUM WIDTH.** THE MINIMUM WIDTH OF A CURB RAMP SHALL BE 36" (914 MM) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.

4.7.3 **MINIMUM WIDTH.** THE MINIMUM WIDTH OF A CURB RAMP SHALL BE 36" (914 MM) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.

**4.8 RAMPS.**

4.8.1 **GENERAL.** RAMPS SHALL BE CONSTRUCTED TO PROVIDE ACCESS TO THE BUILDING FROM THE STREET TO THE ENTRANCE OF THE BUILDING.

4.8.2 **MINIMUM WIDTH.** THE MINIMUM WIDTH OF A RAMP SHALL BE 36" (914 MM) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.


4.8.3 **MINIMUM WIDTH.** THE MINIMUM WIDTH OF A RAMP SHALL BE 36" (914 MM) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.

**4.9 STAIRS.**


4.9.1 **GENERAL.** STAIRS SHALL BE CONSTRUCTED TO PROVIDE ACCESS TO THE BUILDING FROM THE STREET TO THE ENTRANCE OF THE BUILDING.

4.9.2 **MINIMUM WIDTH.** THE MINIMUM WIDTH OF A STAIR SHALL BE 36" (914 MM) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.


4.9.3 **MINIMUM WIDTH.** THE MINIMUM WIDTH OF A STAIR SHALL BE 36" (914 MM) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.

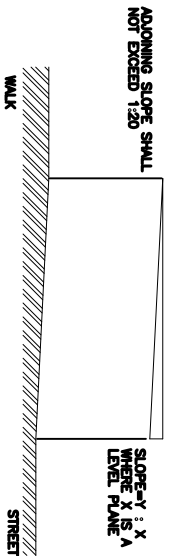

**FIG. 12**  
EXAMPLES OF EDGE PROTECTION AND HANDRAIL EXTENSIONS

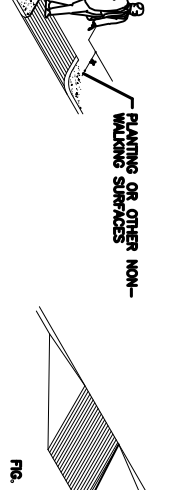

**FIG. 13**  
BUILT-UP CURB RAMP

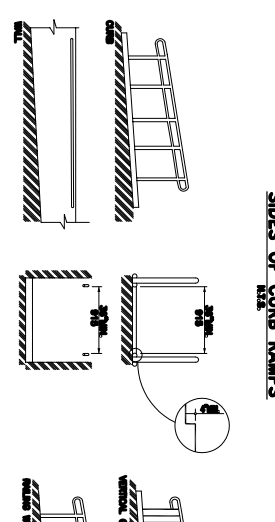


**4.10 ELEVATORS.**

4.10.1 **GENERAL.** ELEVATORS SHALL BE CONSTRUCTED TO PROVIDE ACCESS TO THE BUILDING FROM THE STREET TO THE ENTRANCE OF THE BUILDING.

4.10.2 **MINIMUM WIDTH.** THE MINIMUM WIDTH OF AN ELEVATOR SHALL BE 36" (914 MM) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.

4.10.3 **MINIMUM WIDTH.** THE MINIMUM WIDTH OF AN ELEVATOR SHALL BE 36" (914 MM) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.

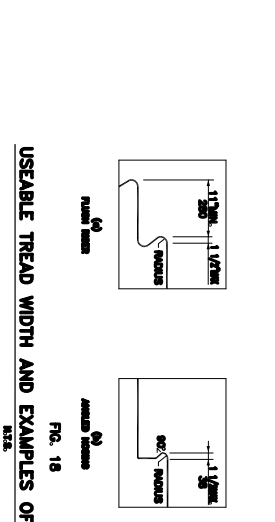


**4.11 PLATFORM LIFTS (WHEELCHAIR LIFTS).**

4.11.1 **GENERAL.** PLATFORM LIFTS SHALL BE CONSTRUCTED TO PROVIDE ACCESS TO THE BUILDING FROM THE STREET TO THE ENTRANCE OF THE BUILDING.

4.11.2 **MINIMUM WIDTH.** THE MINIMUM WIDTH OF A PLATFORM LIFT SHALL BE 36" (914 MM) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.

4.11.3 **MINIMUM WIDTH.** THE MINIMUM WIDTH OF A PLATFORM LIFT SHALL BE 36" (914 MM) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.

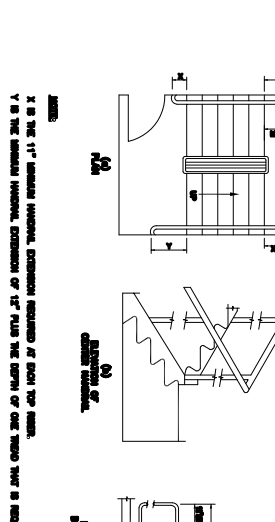


**4.12 WINDOWS.**

4.12.1 **GENERAL.** WINDOWS SHALL BE CONSTRUCTED TO PROVIDE ACCESS TO THE BUILDING FROM THE STREET TO THE ENTRANCE OF THE BUILDING.

4.12.2 **MINIMUM WIDTH.** THE MINIMUM WIDTH OF A WINDOW SHALL BE 36" (914 MM) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.

4.12.3 **MINIMUM WIDTH.** THE MINIMUM WIDTH OF A WINDOW SHALL BE 36" (914 MM) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.

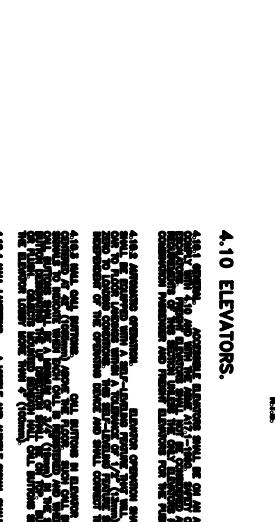


**4.13 DOORS.**


4.13.1 **GENERAL.** DOORS SHALL BE CONSTRUCTED TO PROVIDE ACCESS TO THE BUILDING FROM THE STREET TO THE ENTRANCE OF THE BUILDING.

4.13.2 **MINIMUM WIDTH.** THE MINIMUM WIDTH OF A DOOR SHALL BE 36" (914 MM) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.


4.13.3 **MINIMUM WIDTH.** THE MINIMUM WIDTH OF A DOOR SHALL BE 36" (914 MM) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.

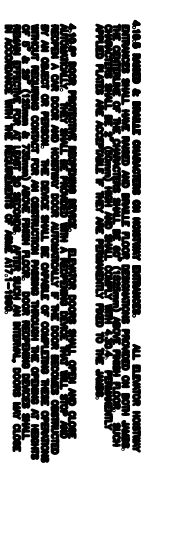

**FIG. 14**  
MINIMUM DIMENSION OF ELEVATOR CARS

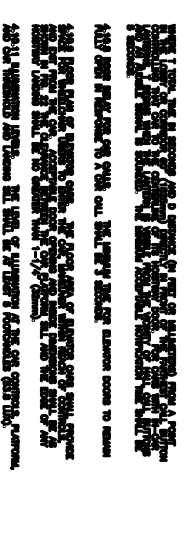

**FIG. 15**  
CAR CONTROLS

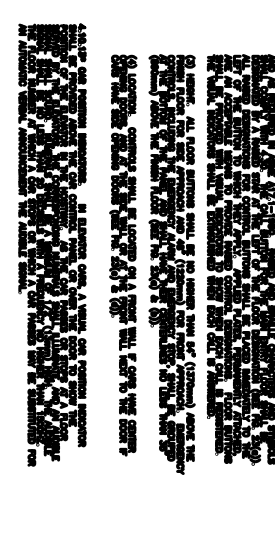

**4.14 ENTRANCES.**

4.14.1 **GENERAL.** ENTRANCES SHALL BE CONSTRUCTED TO PROVIDE ACCESS TO THE BUILDING FROM THE STREET TO THE ENTRANCE OF THE BUILDING.

4.14.2 **MINIMUM WIDTH.** THE MINIMUM WIDTH OF AN ENTRANCE SHALL BE 36" (914 MM) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.


4.14.3 **MINIMUM WIDTH.** THE MINIMUM WIDTH OF AN ENTRANCE SHALL BE 36" (914 MM) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.

4.15 DRINKING FOUNTAINS AND WATER COOLERS.

4.15.1 **GENERAL.** DRINKING FOUNTAINS AND WATER COOLERS SHALL BE CONSTRUCTED TO PROVIDE ACCESS TO THE BUILDING FROM THE STREET TO THE ENTRANCE OF THE BUILDING.

4.15.2 **MINIMUM WIDTH.** THE MINIMUM WIDTH OF A DRINKING FOUNTAIN OR WATER COOLER SHALL BE 36" (914 MM) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.

4.15.3 **MINIMUM WIDTH.** THE MINIMUM WIDTH OF A DRINKING FOUNTAIN OR WATER COOLER SHALL BE 36" (914 MM) UNLESS OTHERWISE SPECIFIED BY THE LOCAL GOVERNMENT.



**DAMON ENGINEERING, INC.**  
EMMETT DAMON

**ARCHITECT**  
ROBERT SOLBERGER

1095 FLORIDA AVENUE  
SLIDELL, LA, 70458  
985-649-5832

WEBSITE:  
WWW.DAMONENGINEERING.CO  
EMAIL:  
DAMONENGE@BELLSOUTH.NET

ARCHITECTURE  
ENGINEERING  
STUDIES  
PLANNING  
INVESTIGATION  
EXPERT WITNESS

**NEW OFFICE BUILDING**  
PLATFORM CRANE  
POWELL DRIVE  
SLIDELL, LA

**HANDICAPPED NOTES**

REV:  
SCALE: AS NOTED  
JOB#: 1898  
DATE: 10-8-07  
SHEET 13

**H-1**  
OF 25