

- ### DRAINAGE NOTES
1. DRAIN PIPE AND FITTINGS WITHIN PROPERTY LINE SHALL BE POLYVINYL CHLORIDE PLASTIC PIPE, MEETING CLASS 100 C-900 PVC.
 2. ELEVATIONS SHOWN ARE MSL.
 3. FIELD VERIFY ALL ELEVATIONS AND DRAINAGE SYSTEM PLACEMENT PRIOR TO START OF WORK.
 4. PROVIDE VERTICAL ELBOW AT DOWNSPOUTS FOR CONNECTION TO SUBSURFACE DRAINAGE WHERE INDICATED. ELBOW ID SHALL BE SIZED SUCH THAT THE DOWNSPOUT CAN BE INSERTED INTO THE PIPE OPENING WITHOUT DEFORMATION TO THE DOWNSPOUT.
- ### DRAINAGE LEGEND
- TOP OF CONCRETE ELEVATION
 - TOP OF GRATE ELEVATION
 - INVERT OF PIPE ELEVATION
 - SWALE
 - DOWNSPOUTS (DS) FROM ROOF GUTTERS
 - PARKING WHEEL STOP


DAMMON ENGINEERING, INC.
 LOUISIANA & MISSISSIPPI
 Chief Engineer: Brian Match, PE
 354 Old Spanish Trail
 Slidell, LA 70458
 www.dammonengineering.com
 info@dammonengineering.com
 PH: 985.647.1824

#	DESCRIPTION	REVISIONS	DATE

SEAL:

NEW OFFICE WAREHOUSE
MIKE SCHWARTZ
 MANDEVILLE, LA
 JOB NO: 01-21-2020
 DATE: 01-21-2020
 DRAWN BY: BMM
 CHECKED BY: CSD

SHEET TITLE:
SITE DRAINAGE PLAN
 DRAWING NUMBER:
C104
 SHEET No: 6 of 12

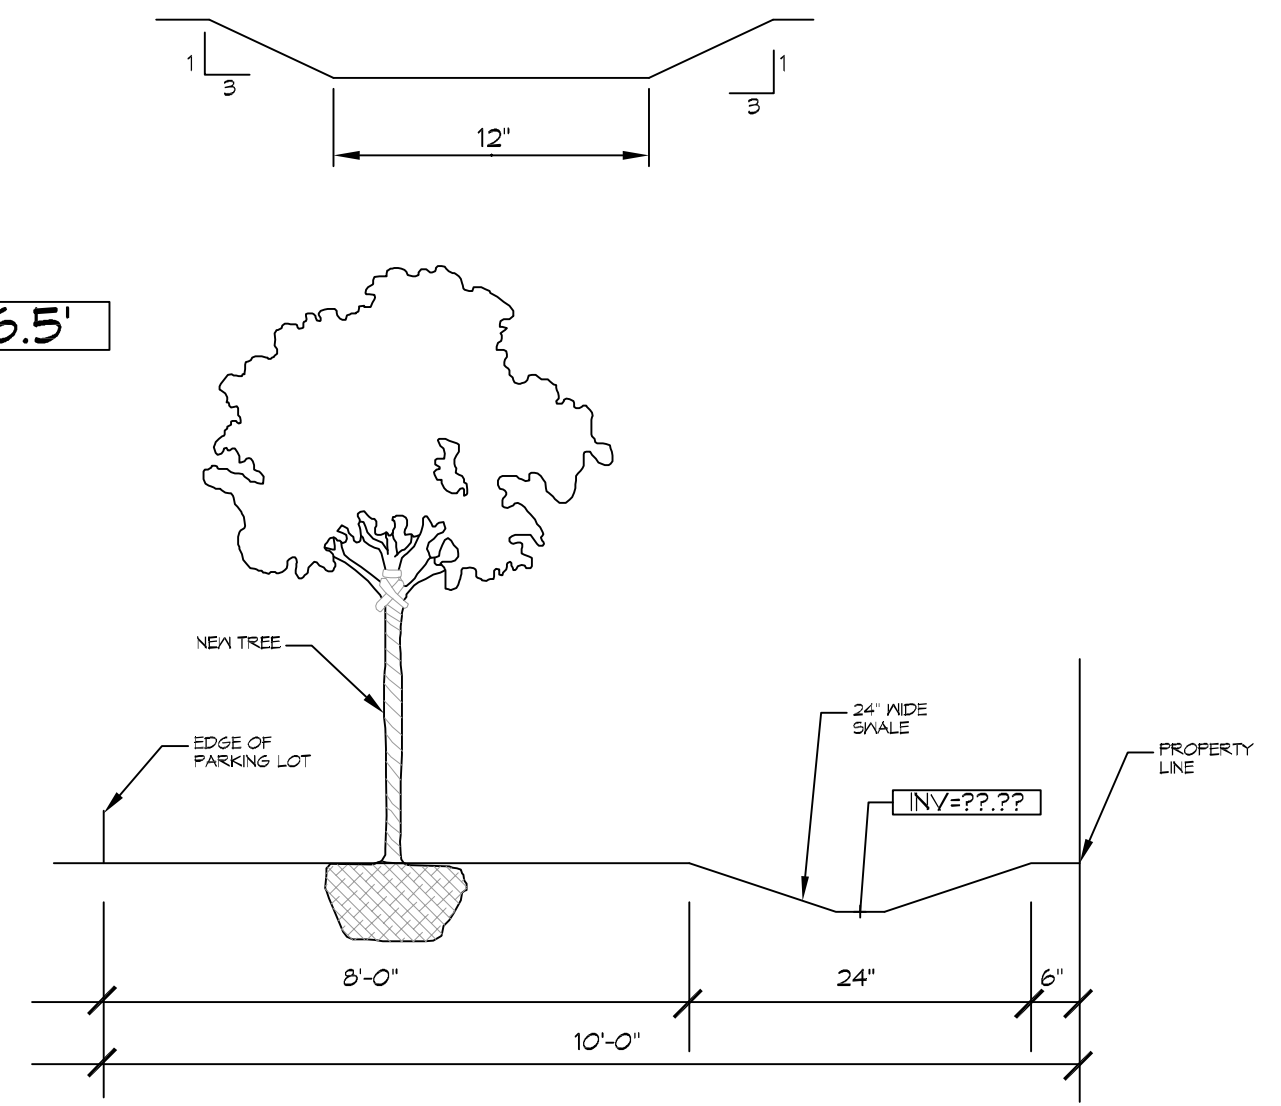

14 SWALE AND PLANTABLE AREA
SCALE: N.T.S.

14 DRAINAGE PLAN
SCALE: 1" = 10'-0"