

- ### DRAINAGE NOTES
1. DRAIN PIPE AND FITTINGS WITHIN PROPERTY LINE SHALL BE POLYVINYL CHLORIDE PLASTIC PIPE, MEETING CLASS 100 C-900 PVC.
  2. ELEVATIONS SHOWN ARE MSL.
  3. FIELD VERIFY ALL ELEVATIONS AND DRAINAGE SYSTEM PLACEMENT PRIOR TO START OF WORK.
  4. PROVIDE VERTICAL ELBOW AT DOWNSPOUTS FOR CONNECTION TO SUBSURFACE DRAINAGE WHERE INDICATED. ELBOW ID SHALL BE SIZED SUCH THAT THE DOWNSPOUT CAN BE INSERTED INTO THE PIPE OPENING WITHOUT DEFORMATION TO THE DOWNSPOUT.
- ### DRAINAGE LEGEND
- TOP OF CONCRETE ELEVATION
  - TOP OF GRATE ELEVATION
  - INVERT OF PIPE ELEVATION
  - SWALE
  - D.S. DOWNSPOUTS (DS) FROM ROOF GUTTERS
  - PARKING WHEEL STOP


**DAMMON ENGINEERING, INC.**  
 LOUISIANA & MISSISSIPPI  
 Chief Engineer: Brian Match, PE  
 354 Old Spanish Trail  
 Slidell, LA 70458  
 www.dammonengineering.com  
 info@dammonengineering.com  
 PH: 985.647.1824

#	DESCRIPTION	REVISIONS	DATE

SEAL:

**NEW OFFICE WAREHOUSE**  
**MIKE SCHWARTZ**  
 MANDEVILLE, LA  
 JOB No: 2409 DATE: 02-12-2020  
 DRAWN BY: CSD CHECKED BY: BMM

SHEET TITLE:  
**SITE DRAINAGE PLAN**  
 DRAWING NUMBER:  
**C104**  
 SHEET No: 6 of 12

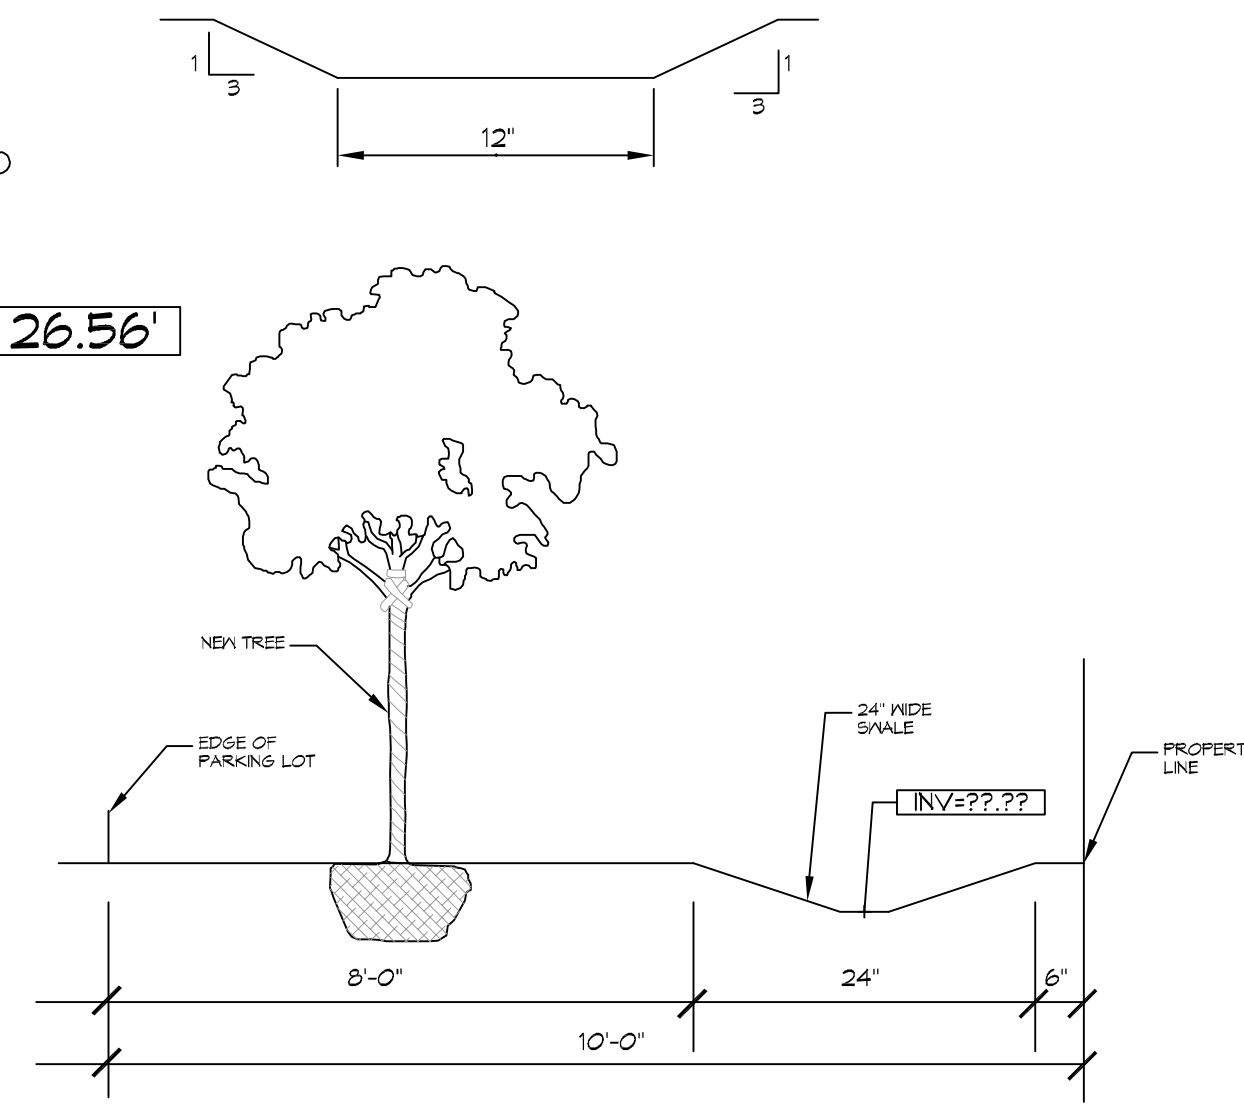

**14 DRAINAGE PLAN**  
 SCALE: 1" = 10'-0"

**14 SWALE AND PLANTABLE AREA**  
 SCALE: N.T.S.