

MasterTemp[®]

High Performance Heater
By Pentair Pool Products[®]



*Ultra-high performance in a compact,
quiet and eco-friendly design*



No matter what your criteria for top performance and value, MasterTemp® meets them all




Fast, efficient, compact, quiet, safe and eco-friendly

No matter what you're seeking in your swimming pool heater, MasterTemp® measures up. Compare this list of features to any other and you'll see why MasterTemp is setting a new standard for total value.

- ✓ Very compact design for such a high performance heater allows for smaller overall equipment pads that won't intrude on your poolscape.
- ✓ A fully pre-mixed system with a highly efficient air and gas mixture lets MasterTemp heat up fast. No long waits before enjoying your pool or spa.
- ✓ Compare energy efficiency ratings and you'll find MasterTemp at the top of the list. Comfort and economy can go together.
- ✓ With a hot surface ignition (no pilot light) and pushbutton, digital controls, MasterTemp is as easy to operate as your home heating system. Plus, user-friendly indicator lights make system operation and monitoring a snap.
- ✓ The easy-to-view, rotating digital display places controls front and center, no matter how MasterTemp is positioned on your equipment pad.
- ✓ MasterTemp is engineered for super-quiet operation and won't intrude on your poolside leisure time.
- ✓ A tough, rustproof composite exterior handles the heat and weathers the elements.
- ✓ Eco-friendly, MasterTemp is certified for low NOx emissions and outperforms industry standards.
- ✓ Safe operation is assured through a series of features, including; a water pressure switch that senses the pump is running to prevent overheating; high limit switches assure the heater turns off if water temperature exceeds factory-set limits; manual gas shut-off when service is required; stack flue sensor also guards against overheating.
- ✓ Approved for installation on combustible surfaces.

Don't be left out in the cold with heaters that don't measure up to today's longer list of must-have features. Insist on MasterTemp and you're insisting on better performance and lifetime value.

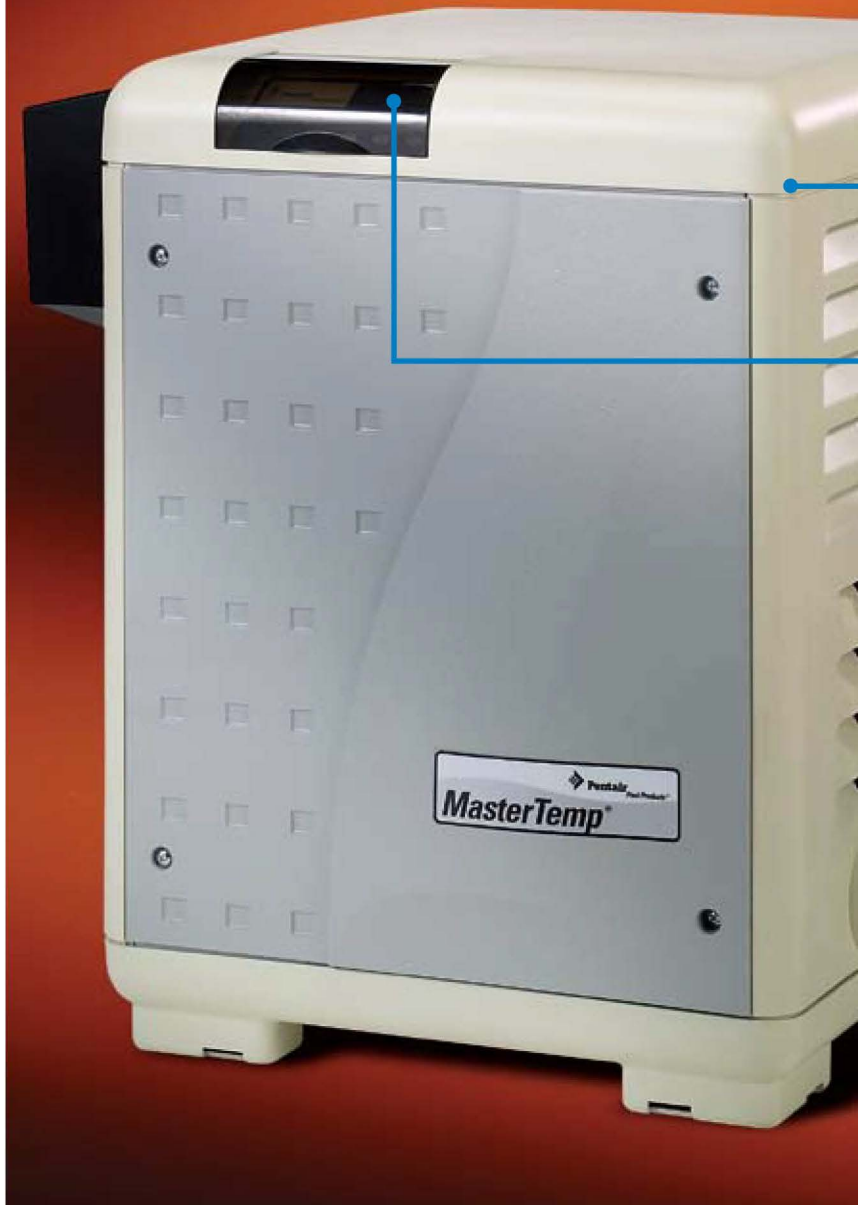



Easy to install or retrofit in even the tightest space — models from 175M to 400M BTUs — all measure 21L x 21W x 28H

Rotating digital display means more installation options and easier access to view operating information

Rustproof, tough composite exterior for long life

Available in natural gas and propane models.

Propane Only

Pool Sizing*

°F Temperature Change/ 24 Hrs.	Heater Size					Heater Size				
	Model 175	Model 200	Model 250/250HD	Model 300	Model 400/400HD	Model 175	Model 200	Model 250/250HD	Model 300	Model 400/400HD
	Pool Capacity in Gallons					Pool Surface Area in Sq. Ft. at 5.5' Depth				
5	85,210	97,383	121,729	146,075	194,766	2,069	2,364	2,955	3,546	4,727
10	42,605	48,691	60,864	73,037	97,383	1,034	1,182	1,478	1,773	2,364
15	28,403	32,461	40,576	48,692	64,922	690	788	985	1,182	1,576
20	21,303	24,346	30,433	36,519	48,691	517	591	739	887	1,182
25	17,042	19,477	24,346	29,216	38,953	414	473	591	710	945
30	14,201	16,230	20,288	24,345	32,461	345	394	493	591	788
35	12,173	13,912	17,390	20,868	27,824	296	338	423	507	675
40	10,651	12,173	15,216	18,260	24,346	259	295	369	443	591

Spa Sizing*

Model	Spa Volume (Gallons)									
	200	300	400	500	600	700	800	900	1,000	
	Minutes for 30°F Temperature Rise (Heater Input in 1000 BTU/HR)									
175	21.0	31.0	40.0	50.0	61.0	71.0	81.0	91.0	102.0	
200	18.0	27.0	35.0	44.0	53.0	62.0	71.0	80.0	89.0	
250/250HD	15.8	23.5	30.8	38.5	46.5	54.3	62.0	70.0	77.8	
300	13.5	20.0	26.5	33.0	40.0	46.5	53.0	60.0	66.5	
400/400HD	9.0	13.0	18.0	22.0	27.0	31.0	35.0	40.0	44.0	

Note: The chart is based on a 30°F (55.6°C) temperature rise, discounting losses and only based on heat required to raise temperature in minutes. Two-year limited warranty. See warranty for details.

*ASME models available. See your Pentair Water Pool and Spa representative for details.

MasterTemp's easy-to-read controls make system operation and monitoring simple. Pool and spa temperatures can be pre-set and controlled with the push of a button. A digital display indicates the water temperature, and five LED lights give you system status and let you know if the heater needs service.

Why MasterTemp® heaters are the “greenest” choice



An Eco Select™ Brand Product

MasterTemp® high performance heaters offer best-in-class energy efficiency. Plus, they are certified for low NOx emissions, making them eco-friendly favorites. That's why MasterTemp is an Eco Select brand product.

The Eco Select brand identifies our “greenest” and most efficient equipment choices. These products save energy, conserve water, eliminate noise, or otherwise contribute to a more environmentally responsible equipment system.

As the global leader in pool and spa equipment manufacturing, we strive to provide greener choices to our customers. We hope you'll join us in embracing more eco-friendly poolsapes by choosing Eco Select branded products for your swimming pool.

Best-in-class energy efficiency

- High efficiency rating makes these heaters extremely economical to operate. If your pool heater is more than 5 years old, chances are a MasterTemp could quickly pay for itself in utility bill savings.
- Optimized fuel/air mix provides superior efficiency and faster heat up.

Certified for low NOx emissions

- In fact, our heaters outperform current industry standards for air pollution exhaust.

Super-quiet operation

Built to last longer

- Tough composite exterior won't corrode; stands up to both heat and weather.

Available from:



Because *reliability* matters most®

www.pentairpool.com

Phone: 800-831-7133

[pumps](#) / [filters](#) / [heaters](#) / [heat pumps](#) / [automation](#) / [lighting](#) / [cleaners](#) / [sanitizers](#) / [water features](#) / [maintenance products](#)