


LEGEND

⊖ RECEPTACLE RECESSED IN SLAB




NOTE:
CONTRACTOR/OWNER TO VERIFY FINAL
LOCATIONS OF ELECTRICAL OUTLETS
TO BE PLACED INTO SLAB.

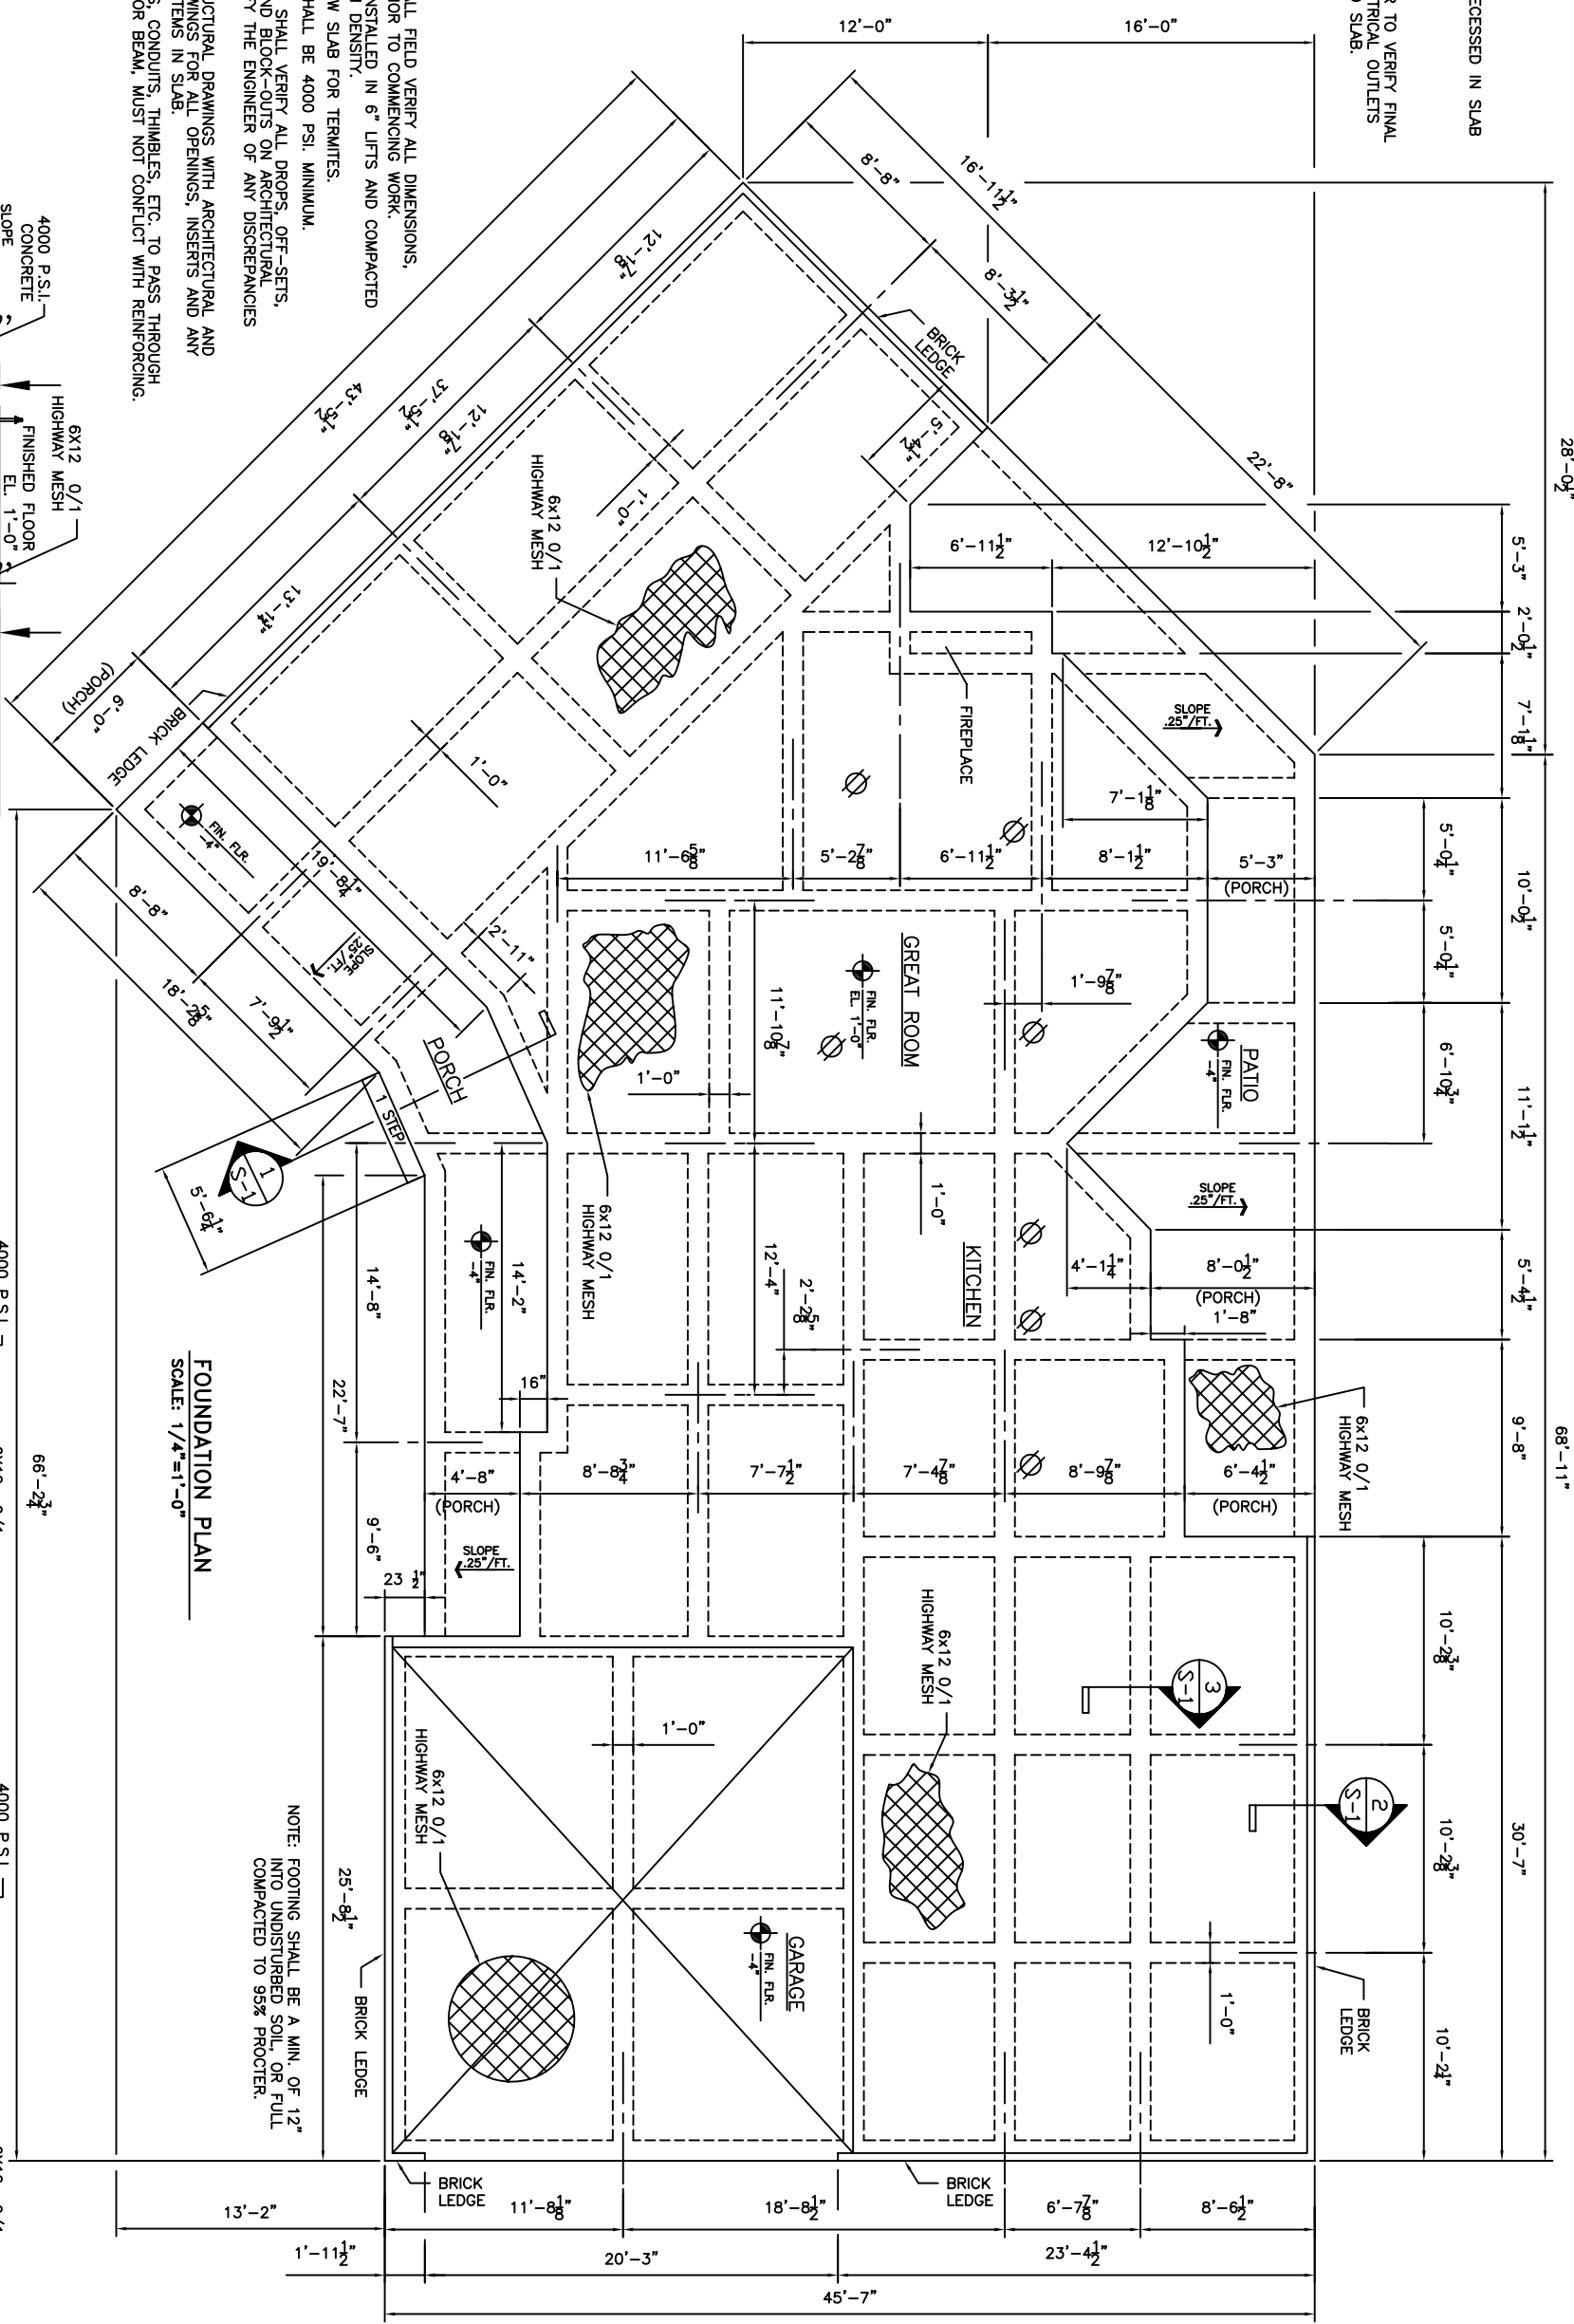

FOUNDATION PLAN
SCALE: 1/4"=1'-0"

NOTES:

1. CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS, DEPRESSIONS PRIOR TO COMMENCING WORK.
2. DIRT SHALL BE INSTALLED IN 6" LIFTS AND COMPACTED TO 95% MAXIMUM DENSITY.
3. TREAT SOIL BELOW SLAB FOR TERMITES.
4. CONCRETE MIX SHALL BE 4000 PSI. MINIMUM.
5. THE CONTRACTOR SHALL VERIFY ALL DROPS, OFF-SETS, BRICK-LEDGES AND BLOCK-OUTS ON ARCHITECTURAL PLANS AND NOTIFY THE ENGINEER OF ANY DISCREPANCIES THAT MAY EXIST.
6. COORDINATE STRUCTURAL DRAWINGS WITH ARCHITECTURAL AND MECHANICAL DRAWINGS FOR ALL OPENINGS, INSERTS AND ANY OTHER RELATED ITEMS IN SLAB.
7. PLANS FOR PIPES, CONDUITS, THIMBLES, ETC. TO PASS THROUGH CONCRETE SLAB OR BEAM, MUST NOT CONFLICT WITH REINFORCING.

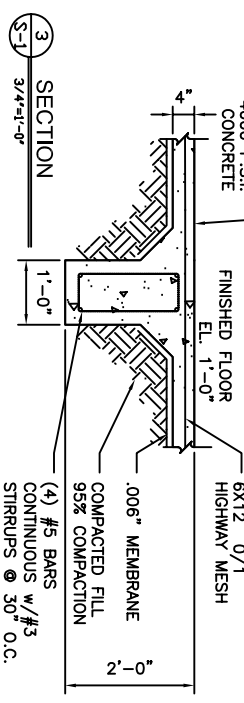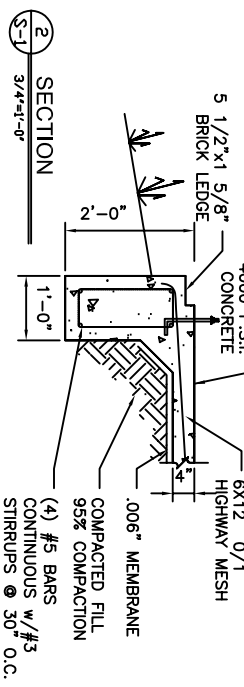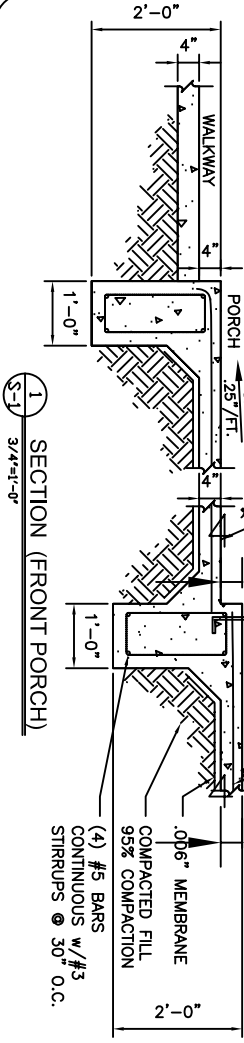

FOUNDATION PLAN
LARRY & LINDSAY JACKSON
129 DEER RUN ROAD
PICAYUNE, MS 39466

JACKSON RESIDENCE
DAMMON ENGINEERING, INC.
1095 FLORIDA AVENUE 985-649-5832 SLIDELL, LA. 70458
DAMMONENGINEERING.COM

SCALE: AS NOTED
FILE:
JOB NO. 1653
DATE: 03-28-05
SHEET
S-1
OF