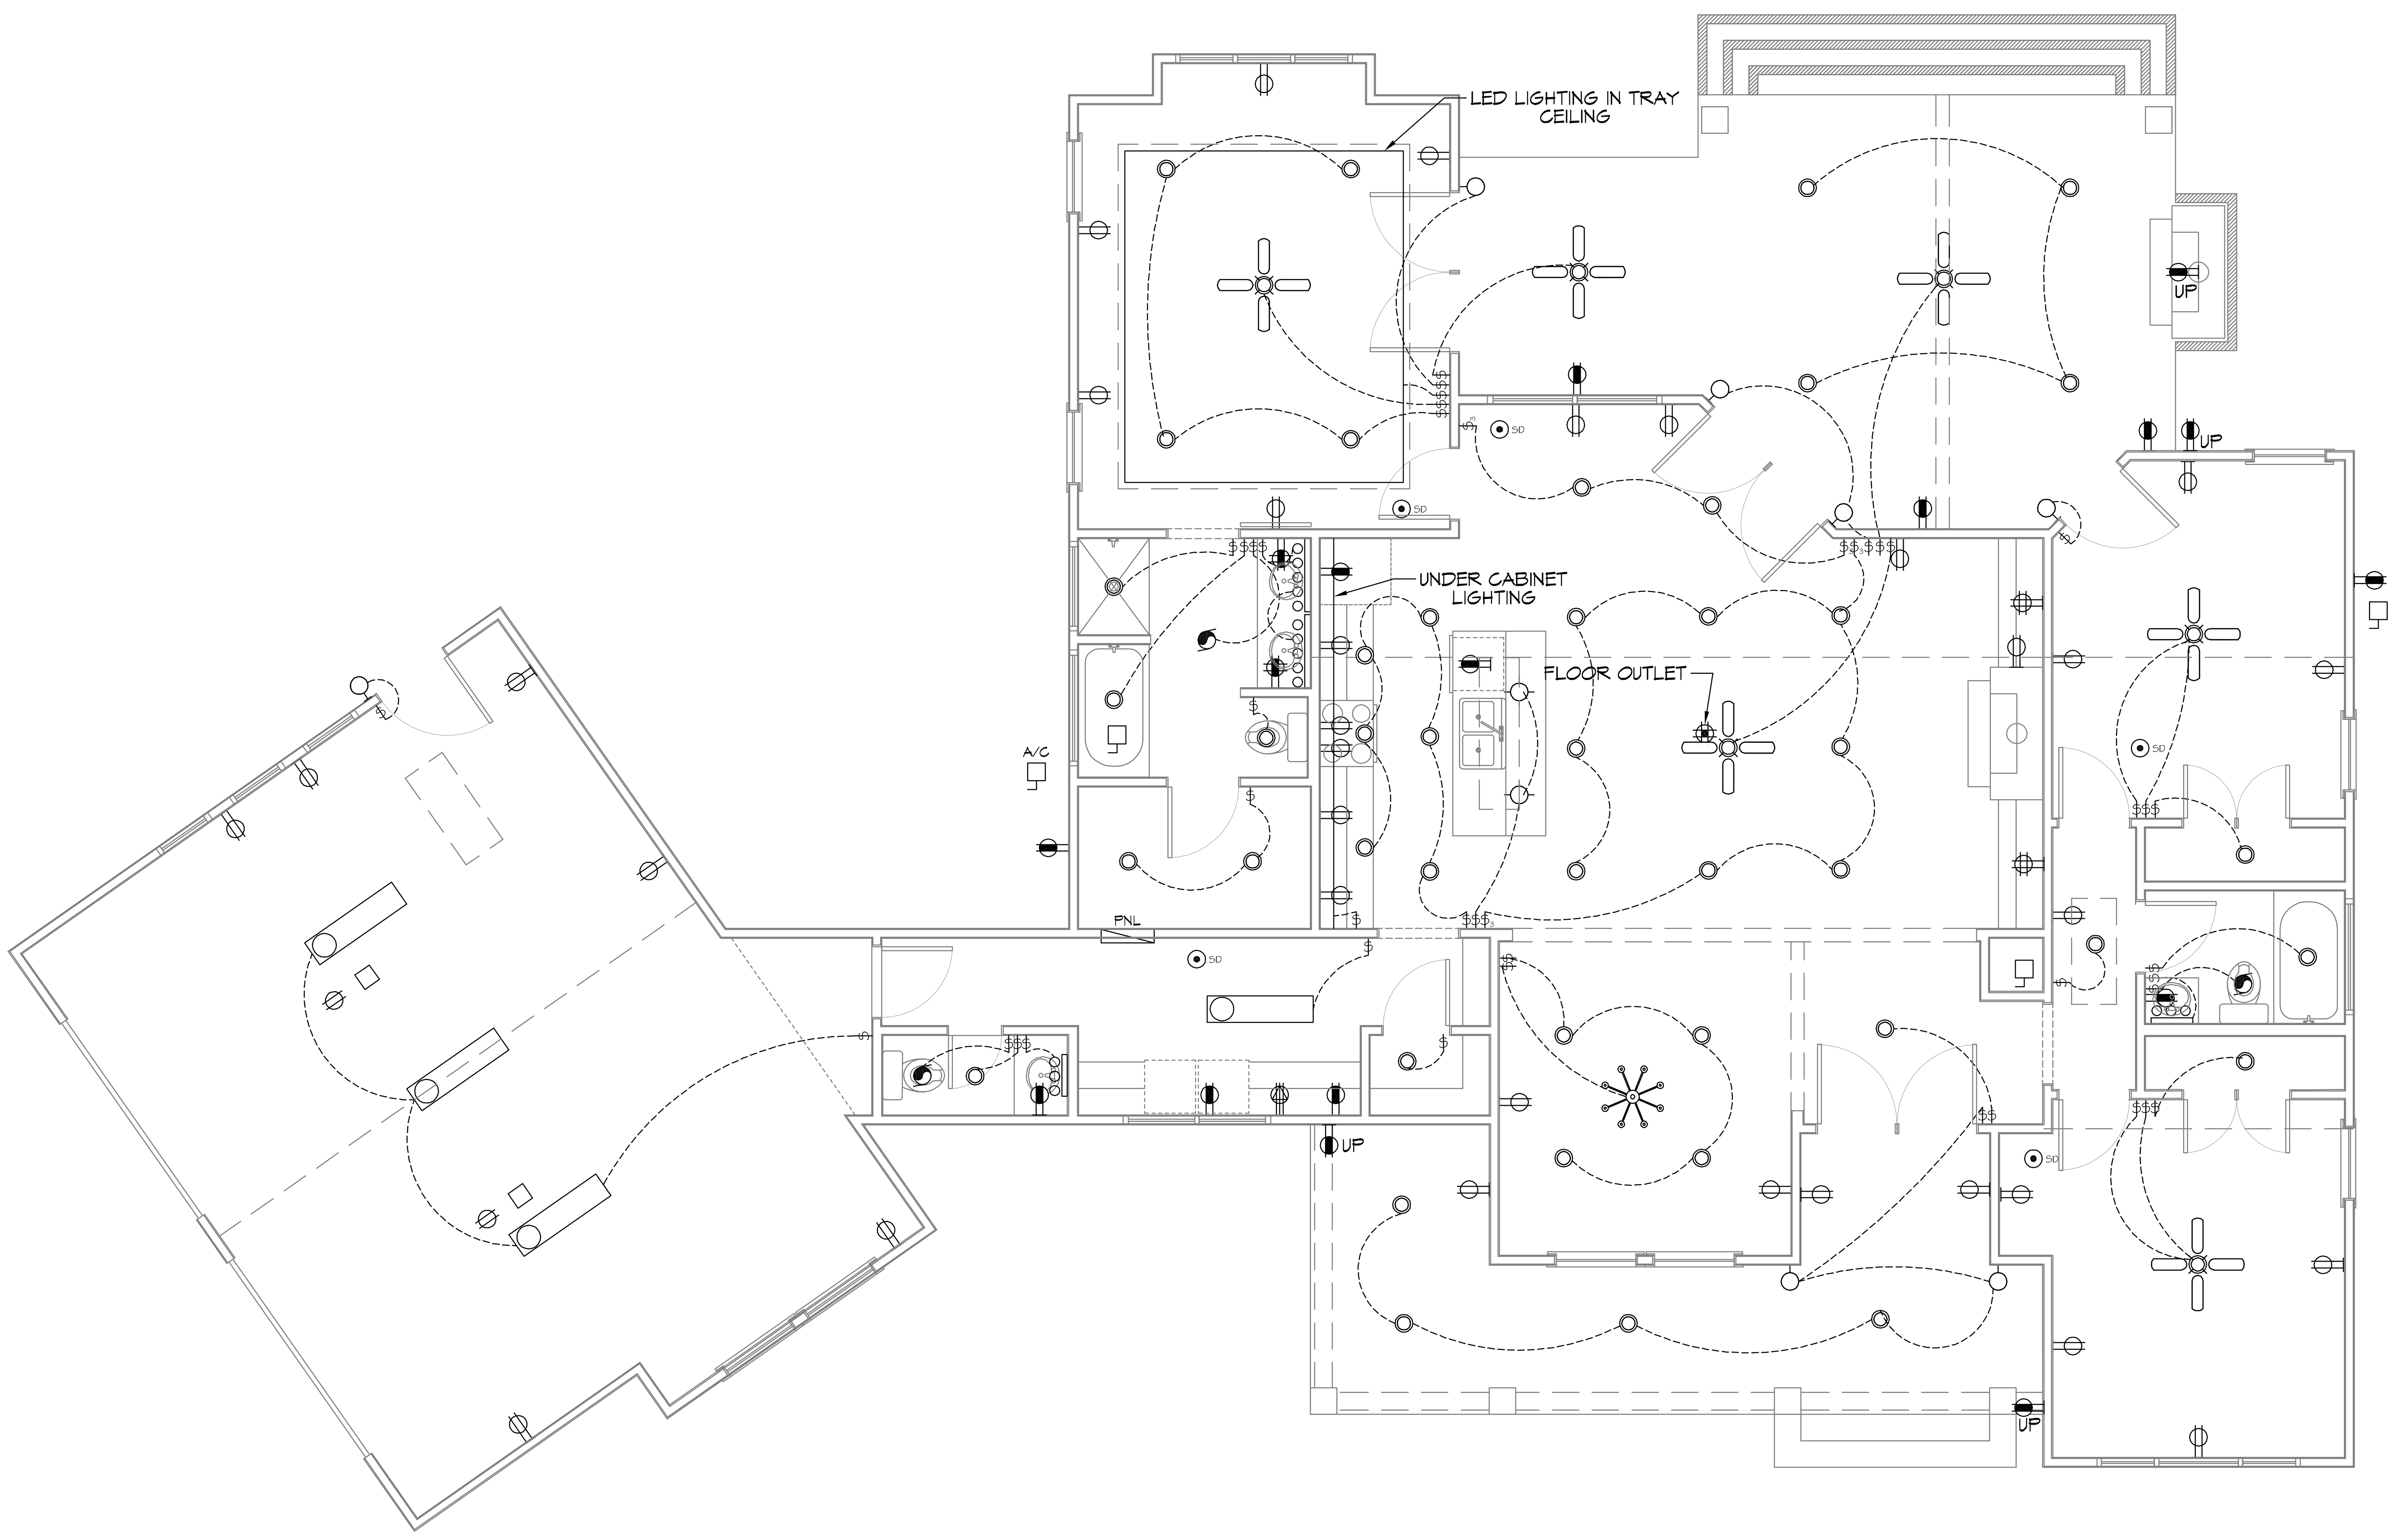

18 POWER AND LIGHTING FLOOR PLAN
SCALE: 1/4" = 1'-0"

LIGHTING LEGEND

- WALL MOUNTED EXTERIOR LIGHT, W/90 MIN BACKUP POWER.
- 1X4 - 2 - FLUORESCENT OR LED; 5800 LUMENS.
- RECESSED LIGHT - FLUORESCENT OR LED
- PENDANT LIGHT - FLUORESCENT OR LED
- FAN WITH LIGHT FIXTURE
- ELECTRIC PANEL BOARD
- LIGHT SWITCH 120V
- LIGHT SWITCH - 3 WAY
- JUNCTION BOX
- EXHAUST FAN

POWER LEGEND

SYMB

- STANDARD 120V DUPLEX RECEPTACLE, 18" AFF (UNLESS OTHERWISE NOTED)
- SINGLE-POLE DEDICATED RECEPTACLE
- GFCI DUPLEX RECEPTACLE
- DEDICATED GFCI DUPLEX RECEPTACLE
- 240V RECEPTACLE - MOUNTED AT 30" AFF
- JUNCTION BOX
- WEATHER-PROOF GFCI DUPLEX RECEPTACLE MOUNTED AT 30" AFF (UNLESS OTHERWISE NOTED)
- STANDARD 120V DUPLEX RECEPTACLE - CEILING MOUNTED
- SINGLE POLE RECEPTACLE
- WALL MOUNTED DATA OUTLET
- QUAD FLOOR OUTLET
- FUSED DISCONNECT, FUSE PER MANUFACTURERS RECOMMENDATIONS.

PRE-WIRE FOR THE FOLLOWING:

- TELEPHONE *ONE INCOMING LINE*
- CABLE VISION *ONE OUTLET PER ROOM MINIMUM*
- SECURITY SYSTEM - COORDINATE W/ OWNER
- COORDINATE ELECTRICAL SYSTEM WITH MECHANICAL CONTRACTOR
- ALL WIRING TO BE COPPER MIN. 12/2 W/ GROUND
- VERIFY LOCATION OF FLOOR OUTLETS IN FAMILY ROOM
- PROVIDE 110V OUTLET FOR GARAGE DISPOSAL UNDER KITCHEN SINK
- PROVIDE 110V OUTLET FOR WHIRLPOOL TUB MOTOR UNDER WHIRLPOOL TUB IN MASTER BATH
- PROVIDE 220V OUTLET FOR CLOTHES DRYER
- COORDINATE SURROUND SYSTEM W/ OWNER

ELECTRICAL NOTES:

- MAIN FEED INTO HOUSE TO BE TRENCHED UNDERGROUND FROM SUPPLY POLE TO METER THEN MAIN DISCONNECT OUTSIDE.
- ALL SMOKE DETECTORS TO BE ELECTRIC POWERED WITH BATTERY BACKUP AND WIRED TO SET ALL ALARMS OFF IF ONE IS TRIPPED.
- ALL EXTERIOR, KITCHEN, AND BATH OUTLETS TO BE GROUND FAULT CIRCUIT INTERRUPT EQUIPPED AND ON A SEPARATE CIRCUIT.
- ELECTRICAL DISCONNECTS ARE TO BE AT A/C UNIT, CONDENSING UNIT, AND WATER HEATER.
- HEAT VENT LIGHTS ARE TO BE ON A SEPARATE CIRCUIT.
- OUTLETS, INCLUDING PHONE AND CABLE, MAY BE ADDED OR CHANGED UPON OWNERS REQUEST.
- ELECTRICAL CONTRACTOR TO VERIFY EQUIPMENT TYPE AND SIZE.
- INSTALL LIGHTS IN ATTIC SPACE W/ SWITCH AT FOOT OF DISP. STAIRS
- ELECTRICAL SERVICE TO BE A 42 CIRCUIT 200 AMP MAIN LOCATED IN THE HOUSE.
- A SUB-PANEL MAY NEED TO BE ADDED FOR ENOUGH CIRCUITS.
- HOUSE TO BE WIRED FOR A SECURITY SYSTEM.
- ALL KITCHEN OUTLETS ARE TO BE GFI EXCEPT APPLIANCE OUTLETS NOT EASILY ACCESSIBLE.
- ARC FAULT BREAKERS ARE TO BE USED IN ALL BEDROOMS.
- IF GAS FIRED APPLIANCES ARE USED IN HOME, CARBON MONOXIDE ALARMS ARE NEEDED (IRC R315).

DAMMON ENGINEERING, INC.
LOUISIANA & MISSISSIPPI
www.dammonengineering.com
info@dammonengineering.com
PH: 985.649.5832
Chief Engineer: Brian Mistich, PE
554 Old Spanish Trail
Slidell, LA 70458

#	DESCRIPTION	DATE
REVISIONS		

SEAL:

NEW RESIDENTIAL
CRAIG BERGERON
6410 HUKO COURT
DIAMONDHEAD, MS 39525

JOB No:	2021	DATE:	02-25-2021
DRAWN BY:	RLD	CHECKED BY:	CKD

The above drawings and specifications, designs and arrangements represented thereby are and shall remain the property of Dammon Engineering, and no part thereof shall be copied, disclosed to others, or used in connection with any work or project other than the specific project for which the have been prepared and developed without written consent of Dammon Engineering. Visual contact with these drawings or specifications shall constitute conclusive evidence of acceptance of these restrictions.

SHEET TITLE:
POWER AND LIGHTING FLOOR PLAN

DRAWING NUMBER:
E101

SHEET No: 10 of 10