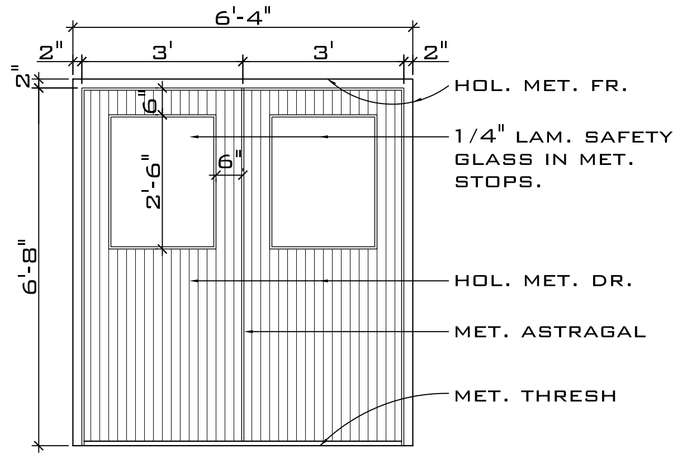

OPNG. MK. 1

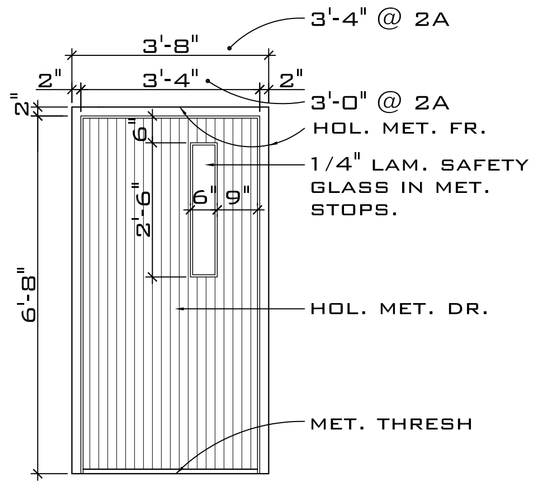

OPNG. MK. 2 & 2A

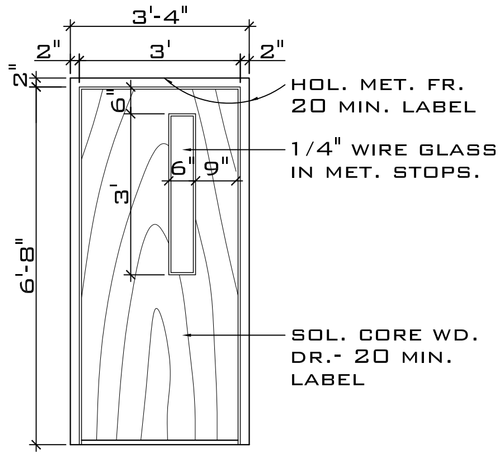

OPNG. MK. 4

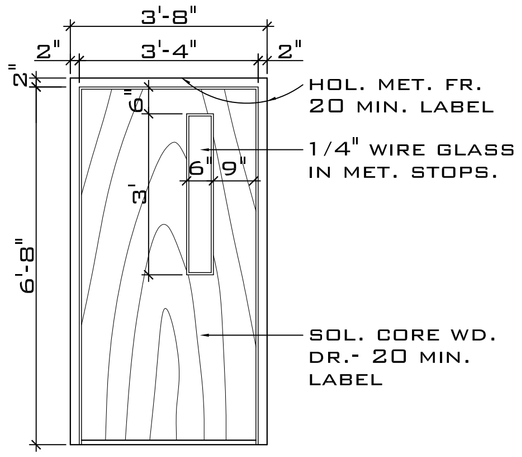

OPNG. MK. 5

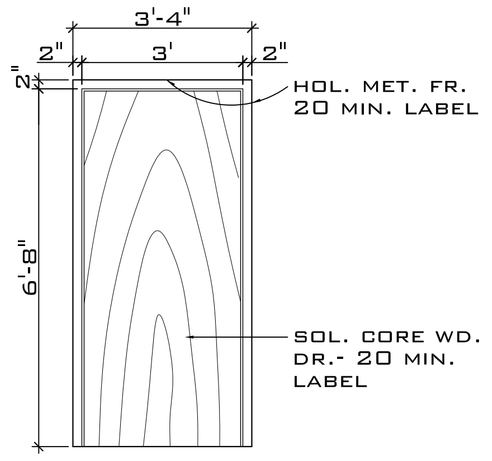

OPNG. MK. 7

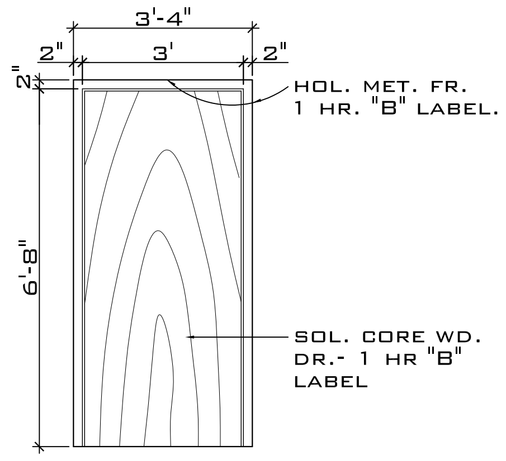

OPNG. MK. 8

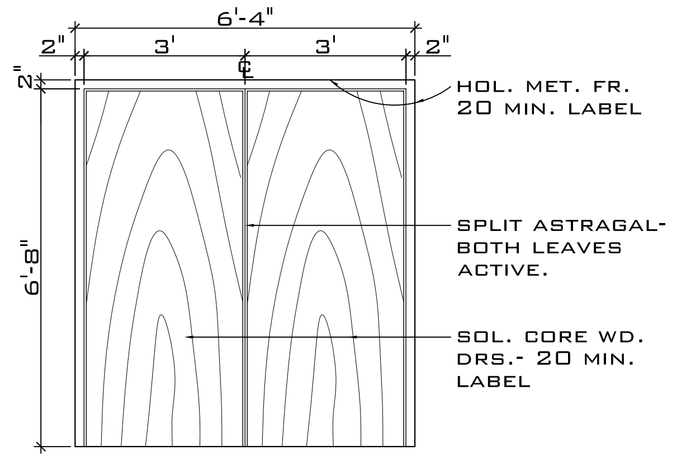

OPNG. MK. 9

OPNG. SCHEDULE

MK.	SIZE	DESCRIPTION	HARDWARE	REMARKS
1	PR. 1 3/4" x 3'-0" x 6'-8" w/ LITE.	EXT. FLUSH HOL. MET. DR. IN HOL. MET. FRAME, GALVANIZED.	AUTO CLOSER, PANIC BAR, MET. THRESH., WEATHER STRIP.	EXT. CYLINDER LOCK, PROVIDE CENTER MULLION.
2	1 3/4" x 3'-4" x 6'-8" w/ LITE.	EXT. FLUSH HOL. MET. DR. IN HOL. MET. FRAME, GALVANIZED.	AUTO CLOSER, PANIC BAR, MET. THRESH., WEATHER STRIP.	EXT. CYLINDER LOCK.
4	1 3/4" x 3'-0" x 6'-8" w/ LITE.	INT. FLUSH SOL. CORE WD. DR. IN HOL. MET. FR.- 20 MIN. LABEL.	AUTO CLOSER, CLASSROOM LOCK.	OFFICE/ ENT. LOCK @ 300, 301, 302.
5	1 3/4" x 3'-4" x 6'-8" w/ LITE.	INT. FLUSH SOL. CORE WD. DR. IN HOL. MET. FR.- 20 MIN. LABEL.	AUTO CLOSER, OFFICE/ ENT. LOCK.	
7	1 3/4" x 3'-0" x 6'-8"	INT. FLUSH SOL. CORE WD. DR. IN HOL. MET. FR.- 20 MIN. LABEL.	AUTO CLOSER, PRIVACY LOCK.	
8	1 3/4" x 3'-0" x 6'-8"	INT. FLUSH SOL. CORE WD. DR. IN HOL. MET. FR.- 1 HR "B" LABEL.	AUTO CLOSER, STOREROOM LOCK.	
9	PR. 1 3/4" x 3'-0" x 6'-8"	INT. FLUSH SOL. CORE WD. DRS. IN HOL. MET. FR.- 20 MIN. LABEL.	OFFICE/ ENT. LOCK- EA. LEAF.	PROVIDE CENTER MULLION, BOTH LEAVES TO BE ACTIVE.

OPENING NOTES:

1. ALL DOORS TO HAVE THREE HINGES EXCEPT MK. 6
2. INTERIOR HINGES TO BE US26D, EXTERIOR HINGES TO BE STAINLESS US32D.
3. VERIFY CORRECT THROAT SIZE FOR HOLLOW METAL FRAMES.
4. HOLLOW METAL FRAMES, DOORS, & WOOD DOORS TO BE PREPARED FOR ALL HARDWARE.
5. PANIC BARS AND AUTO CLOSERS TO BE MOUNTED WITH THROUGH OR SEX BOLTS.
6. SEE KEYING SCHEDULE IN SPECIFICATIONS.
7. CAULKING TO BE EQUAL TO DAP PAINTABLE LATEX WITH SILICONE.
8. PROVIDE A DOOR STOP FOR EACH DOOR, INSTALL BLKING. IN WALL TO SUPPORT WALL MTD. STOPS.
9. ALL EXTERIOR OPENING NERVASTRAL FLASHINGS TO HAVE SEALED END AND SIDE DAMS.
10. EXTERIOR OPENING CAULKING TO BE EQUAL TO DOW CORNING 730, CO-ORD. COLOR W/ ARCH. PROVIDE BACKER ROD @ ALL JOINTS & INSTALL IN ACCORD. W/ MANUF. RECOMMENDATIONS. PROVIDE SUBMITTAL DATA.

OPENING ELEVATIONS

SCALE: 1/2"=1'-0"

08-19-05

CHILD DEVELOPMENT COUNCIL OF ACADIANA, INC.
NEW OFFICE COMPLEX
OPELOUSAS, LA.

ROBERT LEE WILTSE, ARCHITECTS & ASSOC., INC.
COVINGTON, LA.
P.O. BOX 2025

A-7