


ROOM LEGEND		UNIT B 1ST FLOOR	
ROOM NO.	ROOM NAME	AREA	CLNG HT
1001	KINDERGARTEN CLASSROOM	902 SF	10'-0"
1001A	RESTROOM	69 SF	10'-0"
1002	KINDERGARTEN CLASSROOM	892 SF	10'-0"
1002A	RESTROOM	69 SF	10'-0"
1003	KINDERGARTEN CLASSROOM	900 SF	10'-0"
1004	PRE-K CLASSROOM	891 SF	10'-0"
1005	GRADE 1 CLASSROOM	863 SF	10'-0"
1006	PRE-K CLASSROOM	905 SF	10'-0"
1006A	RESTROOM	69 SF	10'-0"
1007	GRADE 1 CLASSROOM	854 SF	10'-0"
1008	PRE-K CLASSROOM	887 SF	10'-0"
1009	GRADE 1 CLASSROOM	863 SF	10'-0"
1010	TEACHER CENTER	228 SF	10'-0"
1010A	STORAGE	98 SF	10'-0"
1032	BUILDING SUPPORT	100 SF	10'-0"
C1001	CORRIDOR	1444 SF	10'-0"
E1003	ELEC	8 SF	EXPOSED
M1001	MECHANICAL	30 SF	EXPOSED
M1002	MECHANICAL	30 SF	EXPOSED
M1005	MECHANICAL	27 SF	EXPOSED
M1006	MECHANICAL	30 SF	EXPOSED
M1007	MECHANICAL	27 SF	EXPOSED
M1009	MECHANICAL	36 SF	EXPOSED
S101	STAIR	324 SF	VARIES

EQUIPMENT GENERAL NOTES

- (E) INDICATES SCHEDULED EDUCATIONAL CASEWORK. SEE SHEET A1.50.
- (S) INDICATES SCHEDULED SCIENCE (LABORATORY) CASEWORK. SEE SCHEDULE IN PROJECT MANUAL.
- (M) INDICATES SCHEDULED MEDIA CENTER CASEWORK. SEE SHEET A1.50.
- (EM) INDICATES SCHEDULED MUSIC CASEWORK. SEE SHEET A1.50.
- (P) INDICATES SCHEDULED ATHLETIC EQUIPMENT. SEE SCHEDULE IN PROJECT MANUAL.
- (V) INDICATES SCHEDULED VOCATIONAL SHOP EQUIPMENT. SEE SCHEDULE IN PROJECT MANUAL.

- A. ALL COUNTERTOPS TO HAVE CONTINUOUS 4" HIGH BACKSPASHES AND ENDSPLASHES UNLESS NOTED OTHERWISE. REFER TO DETAIL 4-A1.62 FOR SECTION OF COUNTERTOP.
- B. HIDDEN LINES (---) INDICATE ITEMS TO BE PART OF LOOSE EQUIPMENT PACKAGE OR BY OWNER, NOT INCLUDED IN CONSTRUCTION CONTRACTS UNLESS NOTED OTHERWISE.
- C. (TB) INDICATES 4" HIGH TACK BOARD LENGTH AS INDICATED. REFER TO MOUNTING HEIGHT DRAWING.
- B. (MB) INDICATES 4" HIGH MARKER BOARD LENGTH AS INDICATED. REFER TO MOUNTING HEIGHT DRAWING.
- C. (MH) INDICATES MOP HOLDER REFER TO MOUNTING HEIGHT DRAWING.
- D. REFER TO A4.00 FOR MOUNTING HEIGHTS.
- E. PROVIDE FILLER STRIPS BETWEEN CASEWORK UNITS AND WALL OR BETWEEN ANY UNIT AS REQUIRED. EXTEND COUNTER TO FACE OF WALL OR ADJACENT TALL CABINET.
- F. ALL CASEWORK DOORS AND DRAWERS SHALL BE LOCKABLE.
- G. ALL EXPOSED BOTTOMS, ENDS AND BACKS OF CASEWORK SHALL BE FINISHED.
- H. CASEWORK INSTALLER SHALL CUT CASEWORK AS REQUIRED FOR PLUMBING/ELECTRICAL LINES.
- I. CASEWORK INSTALLER SHALL CAULK BETWEEN COUNTERS, BACKSPASHES, AND WALLS.
- J. ALL WALL-MOUNTED CASEWORK SHALL BE MOUNTED WITH THE TOP AT 7'-0" AFF UNLESS OTHERWISE NOTED.
- K. REFER TO DETAIL 1-A?? FOR BASKETBALL, AND VOLLEYBALL COURT LAYOUTS.
- L. (FEC) INDICATES A FIRE EXTINGUISHER CABINET. SEE DETAIL 15-A1.62.
- M. (IWB) INDICATES AN INTERACTIVE WHITE BOARD FURNISHED AND INSTALLED BY OWNER.
- N. THE ASTERISK "*" SHOWN WITHIN THE CASEWORK INDICATES THAT THIS UNIT IS A TALL UNIT.
- O. (CLU) INDICATES CONFERENCE LECTURE UNIT.
- P. (HLB) INDICATES HORIZONTAL LOUVER BLINDS.
- Q. (BBC) INDICATES BULLETIN BOARD CASE.
- R. (TWS) INDICATES TACKABLE WALL SURFACE.
- S. * (LETTERS) INDICATE LOCKER TYPES, REFER TO 1-A1.63 FOR ADDITIONAL INFORMATION.
- T. (FD) INDICATES FLOOR DRAINS TO BE 1/2" BELOW FINISHED FLOOR. SLOPE FLOORS TO DRAINS. REFER TO PLUMBING DRAWINGS FOR LOCATIONS.
- U. (KS) INDICATES KNEESPACE, REFER TO DETAIL 8-A1.62.


- RESIDENTIAL EQUIPMENT**
- REFER TO RESIDENTIAL EQUIPMENT SCHEDULE FOR MORE INFORMATION.
- R1 STACKABLE WASHER AND DRYER
 - R2 RESIDENTIAL WASHER
 - R3 RESIDENTIAL DRYER
 - R4 REFRIGERATOR WITH ICE MAKER
 - R5 MICROWAVE
 - R6 REFRIGERATOR WITH NO ICE MAKER
 - R7 COMMERCIAL ICE MAKER

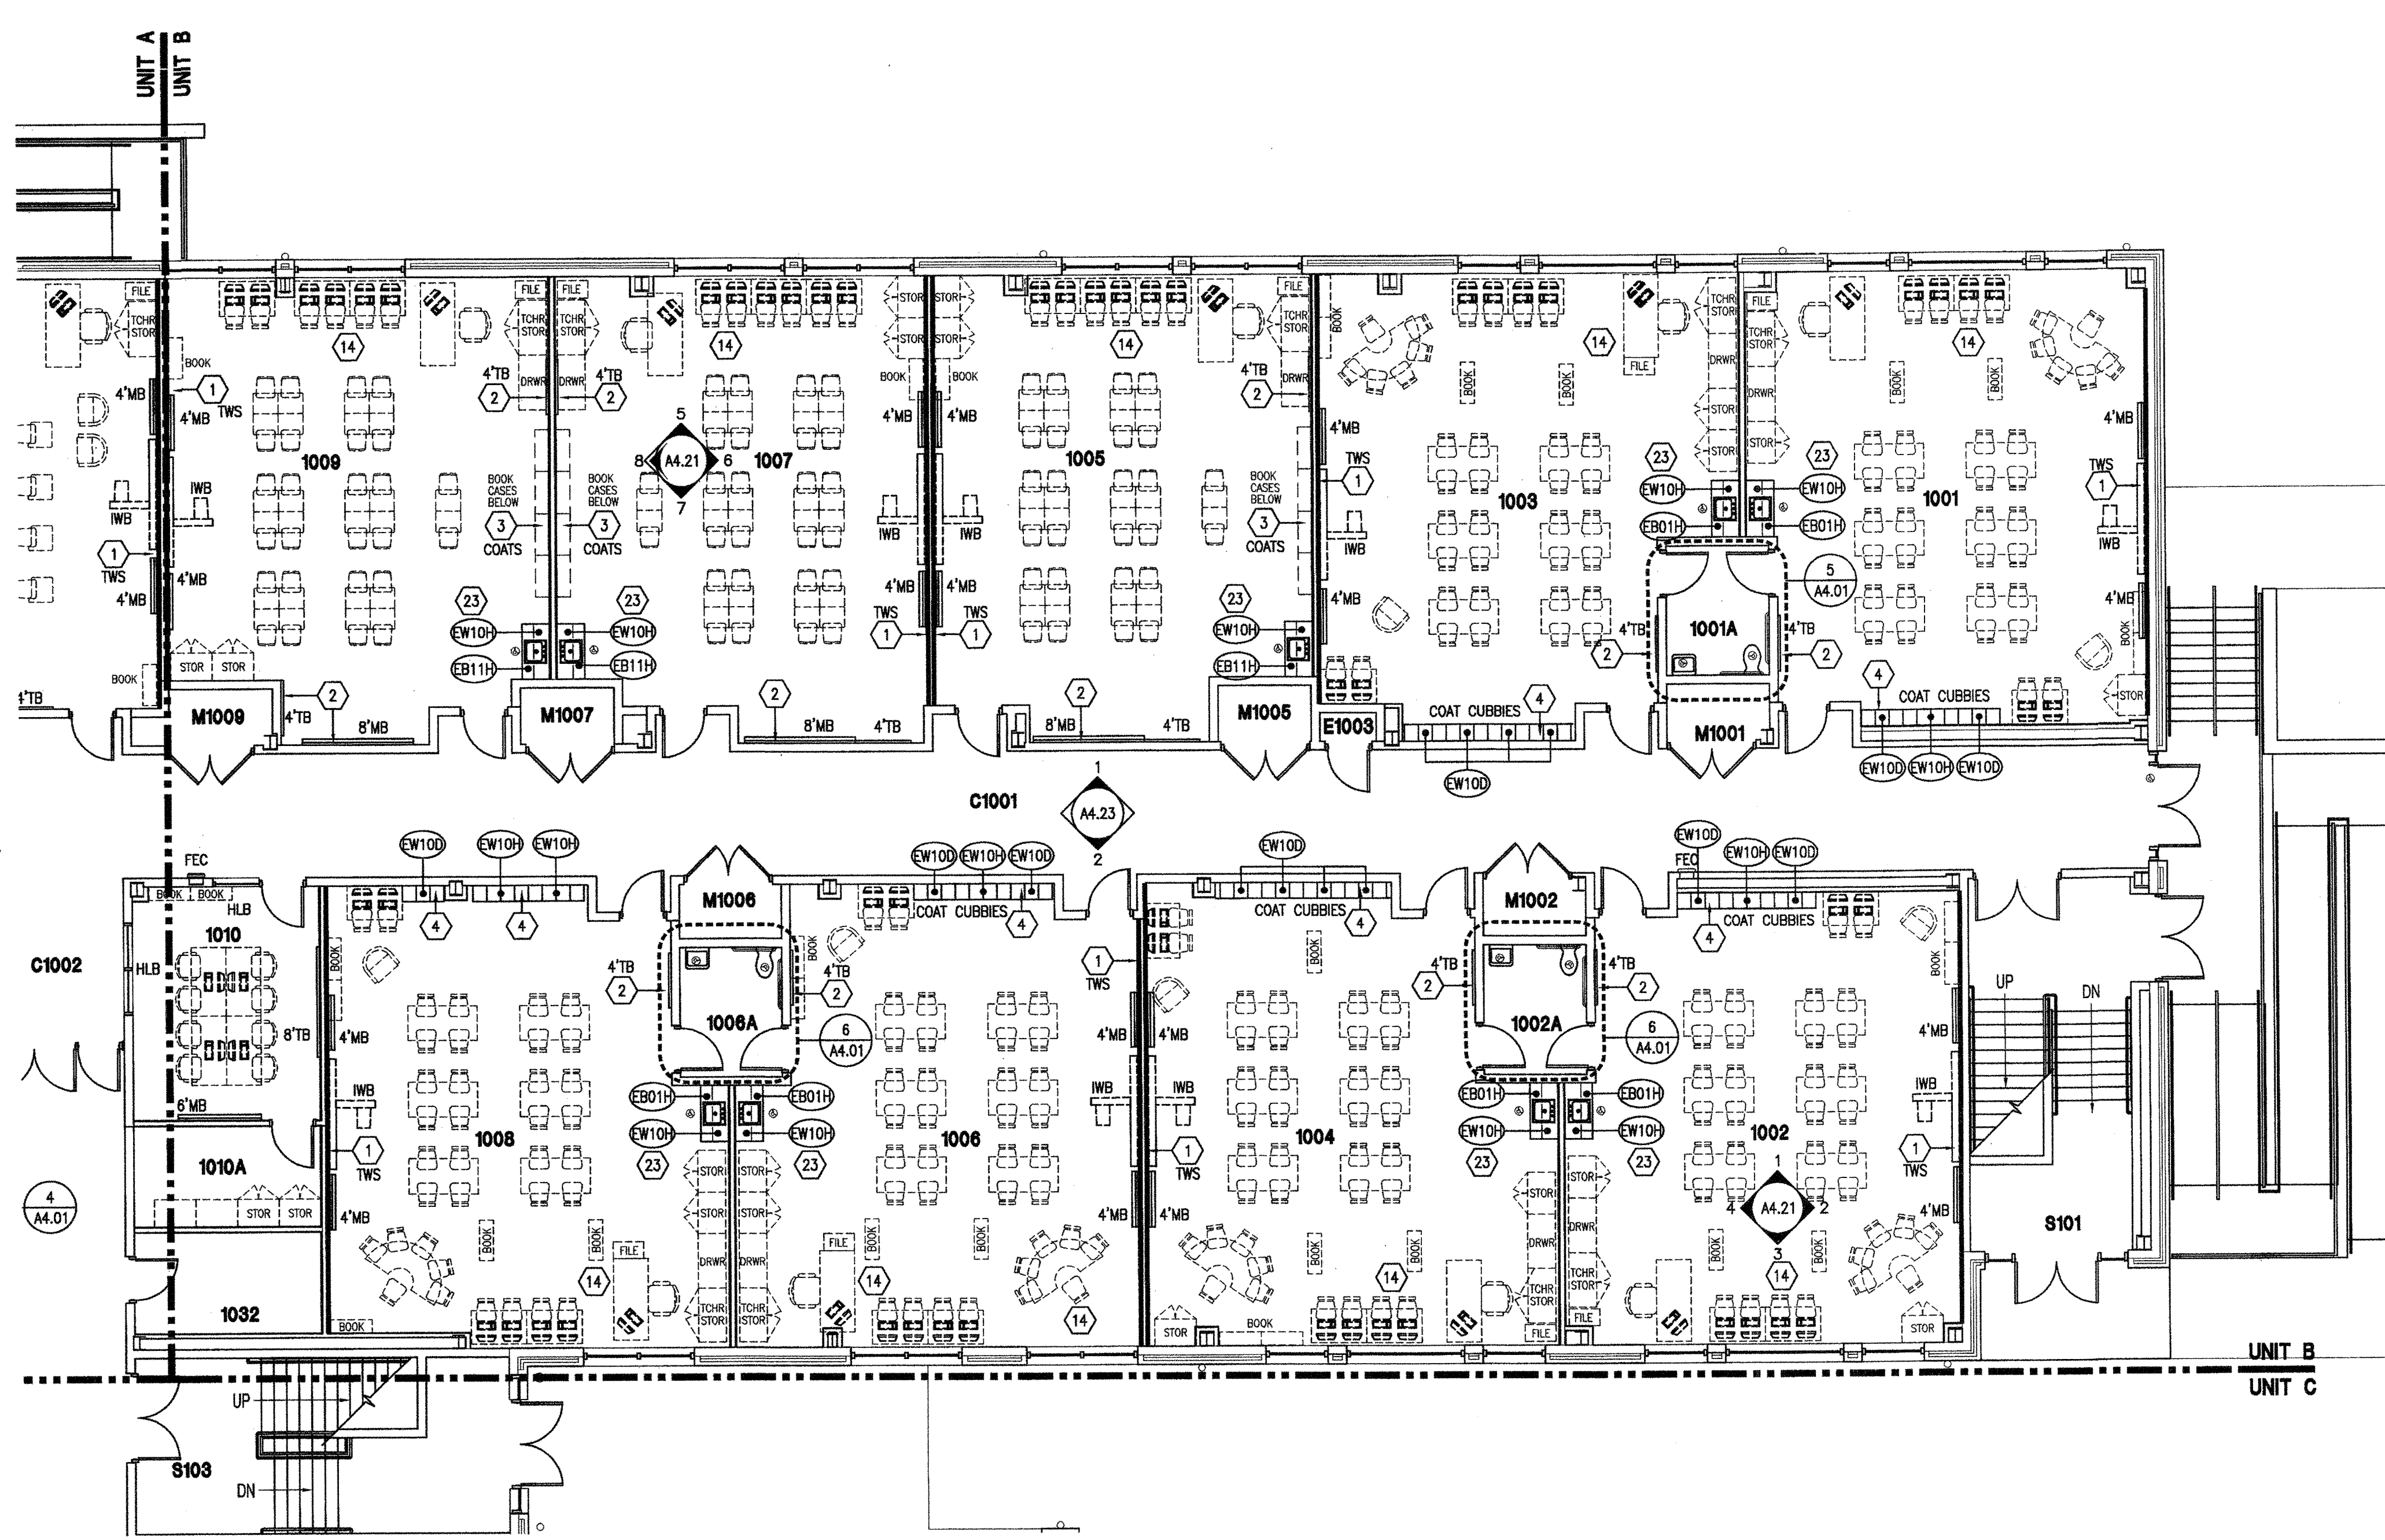

1 UNIT B - EQUIPMENT PLAN - 1ST FLOOR
A1.52 SCALE: 1/8" = 1'-0"

EQUIPMENT KEYNOTES

- (ALL NOTES MAY NOT PERTAIN TO THIS SHEET)
1. TACKABLE WALL SURFACE (TWS) TO EXTEND FROM THE TOP OF RESILIENT BASE TO FINISH CEILING AND FROM CORNER TO CORNER. REFER TO DETAIL 16-A1.62.
 2. PROVIDE A 12" TACKSTRIP ABOVE DISPLAY BOARD. REFER TO PROJECT MANUAL.
 3. 4 COAT HOOK AND SHELF UNITS (12 LINEAR FEET TOTAL). REFER TO DETAIL 11-A1.62.
 4. COAT CUBBIES WITH WALL CABINETS. REFER TO DETAIL 9-A1.62.
 5. 6'-0" SCORER'S TABLE BY BLEACHER MANUFACTURER.
 6. VOLLEYBALL SLEEVE - SEE DETAIL 2-A1.63. REFER TO INTERIOR ELEVATIONS FOR ADDITIONAL INFORMATION.
 8. WALL PADDING AT STAGE FRONT. REFER TO 2-A1.64. PROVIDE AND COORDINATE CUTOUPS FOR ELECTRICAL DEVICES.
 9. WALL PADDING AROUND COLUMNS.
 10. INTERIOR SCOREBOARD - REFER TO PROJECT MANUAL.
 11. MAIN VOLLEYBALL COURT, REFER TO A4.03.
 12. MAIN BASKETBALL COURT, REFER TO A4.03.
 13. PROVIDE A MOP HOLDER (MH - TOILET ACCESSORY) AT FLOOR SINK.
 14. PROVIDE MANUAL ROLLER SHADES (RS) ON INTERIOR SIDE OF ALL WINDOWS IN THIS ROOM.
 15. PROVIDE ELECTRIC ROLLER SHADE (ERS) AT EXTERIOR WINDOW. 15A SHALL BE CLOTH TYPE & 15B SHALL BE BLACKOUT TYPE.
 16. PROVIDE MANUAL ROLLER SHADE (BS) WITH BLACKOUT MATERIAL ON INTERIOR SIDE OF ALL WINDOWS IN THIS ROOM.
 17. TYPE A, CLOSET AND WARDROBE SPECIALTIES.
 18. MIRROR (M3), 4' WIDE x 5' HIGH (SPEECH ROOMS).
 19. ALL COUNTERTOPS IN THIS ROOM SHALL BE EPOXY RESIN.
 20. ALL WINDOW SILLS IN THIS ROOM SHALL BE EPOXY RESIN.
 21. PROVIDE A 6" CHASE BEHIND CASEWORK TO ACCOMMODATE 30" RESIN COUNTERTOP. REFER TO DETAIL 3-A1.62.
 22. DISPLAY CASE - REFER TO DETAILS ON A1.64.
 23. CONTRACTOR TO INSTALL OWNER PROVIDED SOAP DISPENSER AND TOWEL DISPENSER.
 24. STAGE PROJECTION SCREEN - REFER TO PROJECT MANUAL.
 25. STAGE CURTAINS - REFER TO CURTAIN SCHEDULE AND PROJECT MANUAL.
 26. COMMERCIAL WASHER 40LBS - REFER TO PROJECT MANUAL.
 27. COMMERCIAL DRYER 50LBS - REFER TO PROJECT MANUAL.
 28. TYPE B, CLOSET AND WARDROBE SPECIALTIES.
 29. ELECTRIC KILN AND ACCESSORIES, REFER TO PROJECT MANUAL.
 30. WIRE MESH PARTITION WITH 3" DOORS, REFER TO PROJECT MANUAL.
 31. DOCK BUMPER - REFER TO PROJECT MANUAL.
 32. PROVIDE LOCK BOX. REFER TO PROJECT MANUAL.
 33. PROVIDE CASEWORK FILLER PERPENDICULAR TO WALL.
 34. WALL HOOKS (P.E. ITEM NO. P11: TOTAL OF 6) FOR OWNER PROVIDED WALL PADS.
 35. ALL BASE CABINETS SHALL BE 34"H TO MATCH ADA SINK CABINET.
 36. THE POSTER DRAWER UNIT DEPTH SHALL MATCH THE ADJACENT CASEWORK.
 37. 12" TACK STRIP TO EXTEND 17" FROM EDGE OF MB TO EDGE OF MB AND ABOVE IWB.
 38. FUTURE LIBRARY SECURITY SYSTEM.
 39. WALL CABINETS (NOT SHOWN) IN THIS ROOM WILL BE FURNISHED/INSTALLED BY OWNER.
 40. ACOUSTICAL WALL TREATMENT - REFER TO PROJECT MANUAL AND ELEVATIONS FOR ADDITIONAL INFORMATION.
 41. PEDESTAL BENCH, REFER TO DETAIL 3-A1.63.
 42. ACOUSTICAL CURTAIN, REFER TO PROJECT MANUAL AND INTERIOR ELEVATIONS.
 43. HIGH OPEN WALL SHELVING UNIT FOR DISPLAY BOTTOM TO BE MOUNTED AT 7'-4" AFF.
 44. EDUCATIONAL CASEWORK COUNTERTOP TO EXTEND THROUGH OPENING WITH HARDWOOD EDGE (2" WIDE WITH CHAMFER) W/ 1" OVERHANG ON THE COMMONS SIDE.
 45. FLUME HOOD, SEE DETAIL 9-A4.22.
 46. CHEMICAL STORAGE CABINETS, REFER TO LABORATORY CASEWORK SCHEDULE.
 47. ELECTRIC SCREEN: 18:10 FORMAT, 189" DIA. (100"x160") WITH +20" OF DROP.
 48. BULLETIN BOARD CASE (BBC), REFER TO DETAIL 5-A1.64.
 49. END OF LOCKER DETAIL, REFER TO DETAIL 5-A1.63.
 50. SINK CABINET SHALL BE 34"H IN 7TH & 8TH GRADE CLASSROOMS & PROF. DEVELOPMENT.
 51. MARKER BOARD INSTALLED ON OPERABLE WALL.
 52. MUSIC STAFF LINES ON MARKER BOARD.

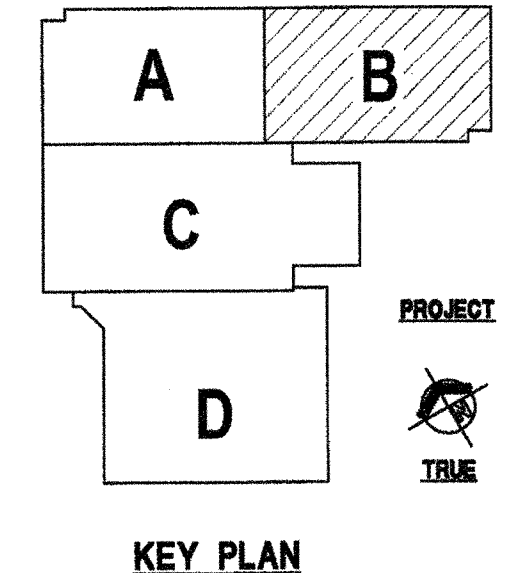

VERIFICATION NOTE


CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND CLEARANCES AND ALL EXISTING FIELD CONDITIONS BEFORE STARTING CONSTRUCTION. COMMENCEMENT OF WORK CONSTITUTES ACCEPTANCE OF CONDITIONS.

SHOULD DIFFERENT CONDITIONS BE ENCOUNTERED, CONTACT THE ARCHITECT BEFORE PROCEEDING WITH WORK.



320 N. Carrollton Avenue, Suite 100
New Orleans, Louisiana 70119
t. 504.488.7739 f. 504.488.7743

© copyright 2012

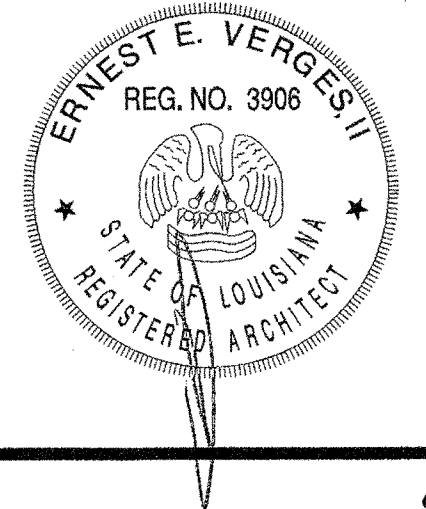

**NEW 3 SECTION ELEMENTARY SCHOOL
AT FISK-HOWARD SCHOOL
RECOVERY SCHOOL DISTRICT**
 NEW ORLEANS, LOUISIANA 70119
 211 S. LOPEZ STREET

DATE ISSUED: 7 DECEMBER, 2012
 REVISED:
 REVISED:
 REVISED:
 REVISED:
 DRAWN BY: MKS
 CHECKED BY:
 PROJECT

BID DOCUMENTS

11085

TITLE:
**1ST FLOOR UNIT B
 EQUIPMENT PLAN**

SHEET:
A1.52