

Elliott Electric Supply

P.O. BOX 630610, NACOGDOCHES, TEXAS 75963-0610

Online at www.ElliottElectric.com

10440 AIRLINE HIGHWAY
BATON ROUGE, LA 70816

225-292-7746

Quote #102-27799

Customer Account: (2858487)
GULF COAST ELECTRIC CO (102)
554 OLD SPANISH TRAIL
SLIDELL, LA 70458

Ship To Information:
GULF COAST ELECTRIC CO (102)
554 OLD SPANISH TRAIL
SLIDELL, LA 70458

Customer Phone: 985-290-3888

Customer Job/PO: TABERNACLE CHURCH

• ATTENTION: Do Not Deliver From This Document!

Salesman: Lawall, Pamela "Pam" M **Invoice Date:** 3/30/2012

Date and Time Printed: 4/2/2012 9:37:29 AM

Item Number	Quote Quantity	Catalog Number	Vendor Code	Description	Price	Unit Code	Extended Price
1	27	2GR8332AUNVEB81U	COO	3 LAMP, 2X4' STATIC LENS	49.75	E	1,343.25
2	81	F032741ECO	SYL	32W/ T8 48" 4100K 75 CRI B	2.31	E	187.11
3	2	HPWM70P	COO	70W HPS 120V NPF W/LAMP &	67.95	E	135.90
4	12	H7ICATNB	COO	6" IC AIR-TITE NO SOCKET	7.50	E	90.00
5	12	ERT713WHHTTS	COO	6" TRM FULL WHT BAFFLE AN	4.64	E	55.68
6	12	65BR30FLCVP130V	SYL	65W 130V BR30 REFLECTOR F	1.67	E	20.04
7	2	678	BRO	50CFM FAN/LITE	36.37	E	72.74
8	2	60ACLCVP130V	SYL	60W 130V A19 MED BASE CLE	0.58	E	1.16
9	2	APX7R	COO	LED EXIT,WHITE UNIVERSAL	18.70	E	37.40
10	2	APEL	COO	EMERGENCY LMP, LED 2 ROUN	18.70	E	37.40
11	1	U4257X	MIB	320A 600V OH/UG 1PH 3W LV	293.19	E	293.19
12	1	LOT_PANELS	CHD	2-PNLS NEG DOST70330C205	960.00	E	960.00

Sub Total: \$ 3,233.87
Tax: \$ 291.05
Total: \$ 3,524.92


Elliott Electric Supply
10440 Airline Highway
Baton Rouge, LA 70816
PH: 225-292-7746

Job Name: Tabernacle Church
Customer Bill of Material

- 1 Pow-R-Line3a
16 Circuits, 400A, Fully Rated, 120/240V 1Ph 3W, Aluminum Bus, 10k AIC,400A, Main Lugs Only[Top Fed],
Surface Mounted
- 1 400A, Main Lugs Only
 - 6 20A, 2P BAB Branch Breaker
 - 2 200A, 2P EDB Branch Breaker
 - 1 Std. Bolted Al Ground Bar (Al/Cu Cable)
 - 1 Panel Nameplate - White with Black Letters
 - 1 Type 3R Enclosure:LWPQ2060
- Designations: 400A MLO
- 1 Pow-R-Line1a
18 Circuits, 225A, Fully Rated, 120/240V 1Ph 3W, Aluminum Bus, 10k AIC,225A, Main Lugs Only[Top Fed],
Surface Mounted
- 1 225A, Main Lugs Only
 - 1 60A, 2P BAB Branch Breaker
 - 12 20A, 1P BAB Branch Breaker
 - 2 1P BAB Branch Provision Only
 - 1 30A, 2P BAB Branch Breaker
 - 1 Std. Bolted Al Ground Bar (Al/Cu Cable)
 - 1 Panel Nameplate - White with Black Letters
 - 1 Type 1 Enclosure:EZB2036R
 - 1 EZ Trim, Door in Door, Concealed Hardware:EZT2036S
- Designations: 200a

All orders must be released for manufacture within 90 days of date of order entry. If approval drawings are required, drawings must be returned approved for release within 60 days of mailing. If drawings are not returned accordingly, and/or if shipment is delayed for any reason, the price of the order will increase by 1.0% per month or fraction thereof for the time the shipment is delayed.

Let for (2) panels \$ 960.00

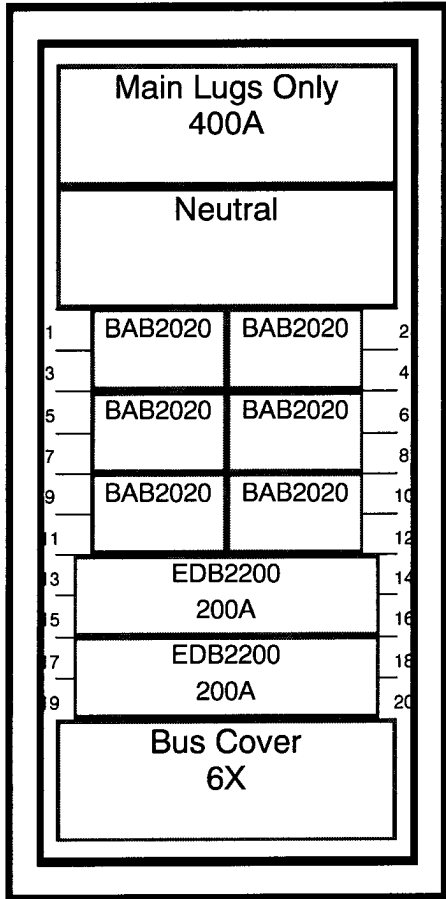

General Information

(Section 1 of 1)

Service Voltage: 120/240V 1Ph 3W
Bus Rating & Type: 400A Aluminum
Ground Bar: Std. Bolted Aluminum, Al or Cu cable
S.C. Rating: 10k A.I.C. Fully Rated

Enclosure: Type 3R
Neutral Rating: 400A

Main Device Type: Main Lugs Only - Top Cable Entry - A & C Phase Connection
Main Terminals: Mechanical - (2) #4-500 kcmil (Cu/Al)
Neutral Terminals: Mechanical - (2) #4-500 kcmil (Cu/Al)
Box Catalog No.: LWPQ2060
Trim: Complete Enclosure (Includes Trim)

Surface Mounted

Box Dimensions: 60." [1524.0mm]H x 20" [508.0mm]W x 6.5" [165.1mm]D
Min. Gutter Size: Top = 5.5" [139.7mm] Bottom = 5.5" [139.7mm]
 Left = 4" [101.6mm] Right = 4" [101.6mm]

Panel ID Nameplate: (1) 400A MLO
Type: Plastic, adhesive-backed (2) 120/240V 1Ph 3W
Color: White with Black Letters (3)

UL

Trim Lock:T-Handle Lock Assembly
 Circuit Directory:Plastic Sleeve with Card
 Painted Box:ANSI 61

Device Modifications:

Ref #	Description

Branch Devices

Qty	Poles	Trip	Frame	Amps	KAIC
2	2	200	EDB	225	10
6	2	20	BAB	100	10

Notes:

The information on this document is created by Eaton Corporation. It is disclosed in confidence and it is only to be used for the purpose in which it is supplied.

PREPARED BY: D0S7 DATE: 04/02/12

Eaton Corporation

APPROVED BY: DATE: 04/02/12

JOB NAME: Tabernacle Church
 DESIGNATION: 400A MLO

VERSION: 7.8

TYPE: PRL3a

DRAWING TYPE: Customer Approval

NEG-ALT NUMBER: D0S70330C205-0000

REVISION: DWG SIZE: A

G.O.

ITEM: SHEET: 1 OF 1

