



Designation: D 4511—~~92~~ (Reapproved 1996) — 00

Standard Test Method for Hydraulic Conductivity of Essentially Saturated Peat (Constant Head) Peat¹

This standard is issued under the fixed designation D 4511; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope*

1.1 This test method covers the determination of the hydraulic conductivity (permeability) of essentially saturated, intact cylindrical specimens of peat when the hydraulic conductivity is greater than ~~1×10^{-7}~~ 1×10^{-7} m/s (1×10^{-5} cm/s). During the test, the specimens are contained in the core holder, or in right, regular cylindrical sections cut from the sampling tube in which they were originally obtained in the field.

1.2 Hydraulic conductivity is calculated on the basis of the measured constant flow rate through the specimen under constant

¹ This test method is under the jurisdiction of ASTM Committee D-18 on Soil and Rock and is the direct responsibility of Subcommittee D18.04 on Hydrologic Properties of Soil and Rock.

Current edition approved July 15, 1992; Nov. 10, 2000. Published November 1992; February 2001. Originally published as D 4511 – 92. Last previous edition D 4511 – 92 (1996).

*A Summary of Changes section appears at the end of this standard.

head.² For verification, flow rate determinations may be made at two or more values of constant head with corresponding calculations of hydraulic conductivity.

1.3 The values stated in SI units are to be regarded as the standard.

1.4 All observed and calculated values shall conform to the guide for significant digits and rounding established in Practice D 6026.

1.4.1 The procedures used to specify how data are collected/recorded and calculated in this standard are regarded as the industry standard. In addition, they are representative of the significant digits that should generally be retained. The procedures used do not consider material variation, purpose for obtaining the data, special purpose studies, or any considerations for the user's objectives, and it is common practice to increase or reduce significant digits of reported data to be commensurate with these considerations. It is beyond the scope of this standard to consider significant digits used in analysis methods for engineering design.

1.5 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 ASTM Standards:

D 653 Terminology Relating to Soil, Rock, and Contained Fluids³

D 1587 Practice for Thin-Walled Tube Geotechnical Sampling of Soils³

D 2434 Test Method for Permeability of Granular Soils (Constant Head)³

D 2974 Test Methods for Moisture, Ash, and Organic Matter of Peat and Other Organic Soils³

D 374220 Practices for Minimum Requirements for Agencies Engaged in the Testing and/or Inspection of Soil and Rock as Used in Engineering Design and Construction³

D 4220 Practices for Preserving and Transporting Soil Samples³

D 4753 Specification for Evaluating, Selecting, and Specifying Balances and Scales for Use in Soil, Rock, and Related Construction Materials³

D 6026 Practice for Using Significant Digits in Calculating and Reporting Geotechnical Test Data⁴

2.2 NRC Document:

Peat Testing Manual⁴⁻⁶

3. Terminology

3.1 ~~Definitions—The~~ For common definitions used of terms in this test method shall be in accordance with standard, refer to Terminology D 653.

3.2 Definitions of Terms Specific to This Standard:

3.2.1 *deaerated (de-aired) water*—water in which the amount of dissolved gas (air) has been reduced.

3.2.2 *flow rate*—the quantity of water flowing through the test specimen in a given period of time, when subjected to a certain constant head differential.

3.2.3 *soaking*—placement of a specimen in water for the purpose of removing gas contained in the pore space, through buoyancy, and replacement with water to cause saturation of the specimen. This method of saturation does not effectively remove all the gas contained in the specimen and does not prevent the continuous slow formation of gas from decomposition under anaerobic conditions.

4. Significance and Use

4.1 Values of hydraulic conductivity determined by this test method may be useful in making rough preliminary estimates of the initial rates of drainage and compression of peat deposits when the only effective stress increase on the deposit is that resulting from a moderate, gradual lowering of the water table.

4.2 Even under light, sustained loads, peat will undergo dramatic volume changes ~~which will~~ that influence (decrease) the hydraulic conductivity of the deposit by several orders of magnitude. This test method does not offer provisions for the determination of the relationship between hydraulic conductivity and the void ratios corresponding to increasing stress levels. Therefore, this test method is not suitable for applications involving grade increases, such as embankment construction or placement of access berms alongside drainage ditches.

4.3 Undisturbed specimens from apparently homogeneous peat deposits at the same location often exhibit significantly different hydraulic conductivity properties due to variations in material composition and sampling procedure.

NOTE 1—The quality of the result produced by this standard is dependent on the competence of the personnel performing it, and the suitability of the

² For further information, see "Methods for Measurement of Saturated Hydraulic Conductivity," *Peat Testing Manual*, Technical Memorandum No. 125, NRC Canada, pp. 80–84.

³ *Annual Book of ASTM Standards*, Vol 04.08.

⁴ Available from National Research Council

⁴ *Annual Book of Canada, Publications Section, Building R-88, Ottawa, Ontario, Canada K1A 0R6: ASTM Standards*, Vol 04.09.

equipment and facilities used. Agencies that meet the criteria of Practice D 3740 are generally considered capable of competent and objective testing/sampling/inspection/etc. Users of this standard are cautioned that compliance with Practice D 3740 does not in itself ensure reliable results. Reliable results depend on many factors; Practice D 3740 provides a means of evaluating some of those factors.

5. Interferences

5.1 Due to the generally fibrous texture and extremely high compressibility of peat, present sampling technologies may not be able to obtain samples truly representative of the in situ conditions. ~~It should therefore be recognized that disturbance~~ Disturbance caused ~~during by~~ sampling and ~~subsequent specimen preparation, together with natural variations~~ preparation as well as ~~heterogeneity existing in material composition, situ may result in differences in cause~~ the measured hydraulic conductivity determined using this method to be significantly different than the specimens by several orders of magnitude. ~~in situ hydraulic conductivity.~~

5.2 There are no provisions in this test method for verification of compliance with the fundamental test conditions listed in 6.1.1 and 6.1.2. The assumption is made that these conditions are satisfied if the flow rate, with time, is a linear relationship.

5.3 The result of the test may be influenced by flow through open passages between the specimen and the rigid wall of the specimen container. If such a condition is suspected or visually verified, notice thereof should be made in the test report.

6. Fundamental Test Conditions

6.1 The following ideal test conditions are prerequisite for laminar flow of water through porous media under constant-head conditions:

- 6.1.1 Continuity of flow with no volume change during a test,
- 6.1.2 Flow with the void space saturated with water and no air bubbles in the voids,
- 6.1.3 Flow in the steady state with no changes in hydraulic gradient, and
- 6.1.4 Direct proportionality of flow velocity with hydraulic gradients below certain values, after which flow becomes turbulent.


6.2 All other types of flow involving partial saturation of void space, turbulent flow, and unsteady state of flow are transient in character and yield variable and time-dependent values of hydraulic conductivity; therefore, they require special test conditions and procedures.

7. Apparatus

7.1 *Flow Device*—The flow device shall be as shown in Fig. 1, fitted with the following components:

^a Such a device, the Peat Core Cutter, is described fully in *Peat Testing Manual*, Technical Memorandum No. 125, NRC

^b National Research Council of Canada, Section 1.1.2, pp. 7-10; Publications Section, Building R-88, Ottawa, Canada K1A 0R6. Out of print.

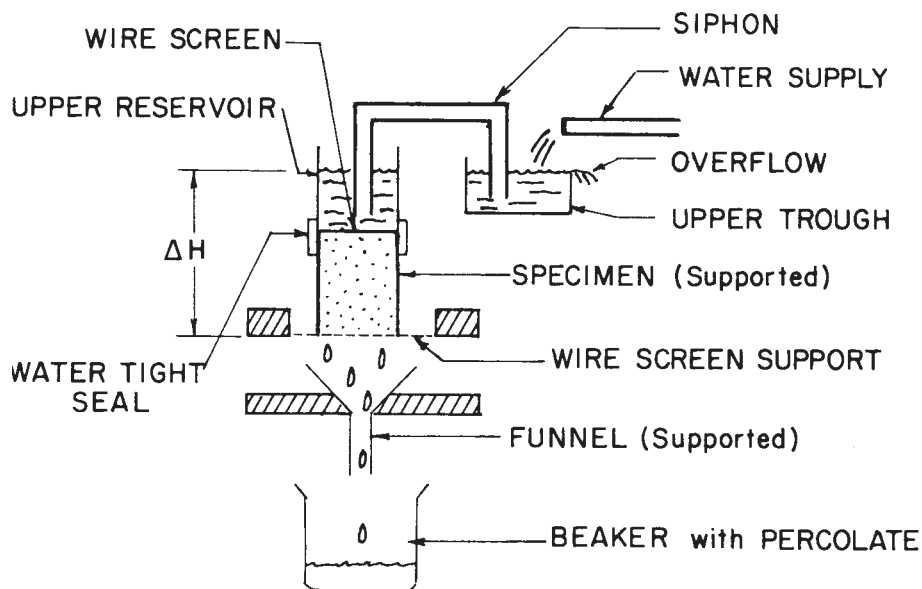

ΔH = TOTAL HYDRAULIC HEAD DIFFERENCE
ACROSS SPECIMEN.

FIG. 1 Diagram for the Constant-Head System for Conductivity Measurement

7.1.1 *Constant-Head Filter Tank*, as shown in Fig. 1 of Test Method D 2434, to supply water and to remove most of the air from the water. The tank shall be fitted with a suitable siphon.

NOTE 1²—Alternatively, deaerated water may be used, supplied from a self-siphoning burette with attached inverted flask (minimum 750-mL capacity), filled with deaerated water, and closed with a rubber stopper holding a tube, 150 cm (6 in.) long with the end cut diagonally.

7.1.2 *Upper Reservoir*, of the same diameter as the sampling cylinder and approximately 150 cm (6 in.) high.

7.1.3 *Wire-Screen Support*, fabricated from a ring clamp, with an inside diameter greater than the specimen cylinder and covered with 425- μm (No. 40) wire mesh screening.

7.1.4 *Circular Disk*, cut from 425- μm (No. 40) wire mesh screening, with a diameter ~~0.1 cm~~ 1 mm smaller than that of the specimen.

7.1.5 *Funnel*, with a head diameter at least 10 % larger than that of the specimen cylinder.

7.1.6 *Two 400-mL Beakers*.

7.2 *Balances*, having a precision (repeatability) Balance—A balance or scale conforming to the requirements of ± 0.01 g for weighing involving a mass Specification D 4753, readable (with no estimate) to 0.1 % of 200 g the test mass, or less, ± 0.1 g for weighings of a mass between 200 and 1000 g, or ± 1 g for a mass greater than 1000 g. better.

7.3 *Miscellaneous Apparatus and Materials*, such as thermometers, ~~clock with sweep second hand~~, timer reading to nearest second, soaking pan, pipe cutters, trimming knife, cheese cloth, rubber bands, vinyl electrical tape, and micro-crystalline wax.

8. Specimen Preparation and Set Up

8.1 Specimens shall have a minimum diameter of ~~7.3 cm~~ 73 mm (2.87 in.). The height-to-diameter ratio shall be between 1 and 2.

8.2 Prepare specimens from tube samples secured in accordance with Practice D 1587, or other acceptable undisturbed sampling procedure, yielding cylindrical samples obtained in tight-fitting, rigid-metal core holders (Note 2); 3). Preserve and transport the specimens in accordance with the practice for Group D samples in Practices D 4220 (Note 3); 4).

NOTE 2—~~It is generally recognized that samples 3—~~ Samples of fibrous peat from shallow depths can be secured with the least amount of disturbance using a rotary type sampling device equipped with a thin cutting edge, serrated with saw-teeth.⁷

NOTE 3⁴—The integrity of a sample contained in a sampler liner or core holder is best preserved if the sample ends are trimmed flush with the ends of the liner and capped using tight-fitting, rigid-metal end caps, securely taped in place and dipped in micro-crystalline wax.

8.3 The specimen is tested in a section of the original sample container without extrusion. If the length of the sample container initially is not within the proper range for height-to-diameter ratio, secure the sample container firmly, without deformation, in a vertical position and cut off a suitable test section with a pipe cutter (Note 4); 5). Trim the peat specimen flush with the cylinder at both ends. Determine and record the mass of the specimen and cylinder. Cover the bottom of the specimen with a piece of cheesecloth and secure the cheesecloth to the cylinder with a rubber band.

NOTE 4⁵—A chain-type pipe cutter, such as those used for cutting automotive exhaust system pipe, is recommended.

8.4 Place the specimen inside a soaking pan with a depth greater than the specimen length. The cheesecloth covering the end of the specimen should rest on screening that is permeable enough to permit free flow of water to the specimen; separating the specimen from the bottom of the pan. Slowly fill the pan with water (Note 5); 6) to a depth approximately ~~0.6 cm~~ 6 mm (0.25 in.) below the top of the specimen. Avoid the flow of water onto the top of the specimen cylinder. Soak the specimen for 72 h.

NOTE 5⁶—Water used for soaking and subsequent permeation may be deaerated tap water, distilled water, or water obtained from the sample location in the field. In the latter case, the water must be filtered, prior to use in the laboratory, to remove suspended solids. The type of water used should be noted in the report under remarks (11.2), however; it should be recognized that hydraulic conductivity determined by this method is influenced by so many factors, that the results are not suitable for comparative study of the effects of different types of water on the hydraulic conductivity of peat.

NOTE 6⁷—Continuing slow decomposition of peat is accompanied by the formation of gases. Total saturation may not be achieved by soaking alone.

8.5 Remove the specimen from the soaking pan, remove the cheesecloth, place the specimen on the pre-wetted wire screen support, and wipe excess water off the specimen cylinder.

8.6 Place the upper reservoir on top of the specimen cylinder and seal the joint with vinyl electrical tape, a wide rubber band, or a coat of micro-crystalline wax, to effect a watertight connection. Dip the cylindrical disk of 425- μm (No. 40) wire mesh screening in water, and place it on the top surface of the specimen.

8.7 Position a funnel and beaker beneath the specimen. Carefully add water (Note 5); 6) to the upper reservoir to activate the siphoning system discussed in 7.1.1 (shown in principle in Fig. 1) and adjust to maintain the desired constant head. To minimize compression of the peat, limit the head of water above the specimen to 50 to 100 mm.

8.8 The ambient temperature during the test should not vary by more than $\pm 3^\circ\text{C}$ ($\pm 5.5^\circ\text{F}$).

9. Test Procedure

9.1 When it appears that a constant flow rate has been attained, set a convenient time to start the flow rate measurement. At the

⁷ Values of

⁷ Such a device, the viscosity of water, μ , may be obtained from Peat Core Cutter, is described fully in *International Critical Tables Peat Testing Manual, Vol 5, McGraw-Hill, New York, NY, 1929. Values of μ are also published in most laboratory testing manuals. Technical Memorandum No. 125, NRC Canada, Section 1.1.2, pp. 7–10.*

appointed time, replace the beaker with a dry, clean beaker of known tare mass. After some suitable, convenient time interval, replace the beaker by a second dry, clean beaker of known tare mass, and weigh the first beaker. Exercise great care that water is not spilled or lost.

9.1.1 Determine the volume of flow in the first time interval as the difference between the mass of the beaker and water, and the tare mass of the beaker (using the assumption that 1 ~~cm~~³ of mL of water has a mass of 1 g) (Note ~~7~~-8).

NOTE ~~7~~8—Graduated cylinders may be used in lieu of beakers as long as the accuracy of the flow rate determination is not impaired.

9.1.2 Repeat the flow measurements and prepare a plot of cumulative flow quantity at the respective times until a constant flow rate has been defined by a minimum of four points falling reasonably close to a straight line. A suitable minimum time interval between flow measurements is the time required for accumulation of a volume of water, corresponding to at least 10 % of the tare mass of the beaker.

9.2 Measure the value of the constant head applied during the flow rate determination as the elevation difference between the water level in the upper reservoir and the bottom of the specimen.

9.3 Measure and record the water temperature during the flow rate measurement.

9.4 Repeat flow rate determinations for at least two different values of constant head.

9.5 After the test, dismantle the apparatus and determine the moisture content of the specimen in accordance with Test Methods D 2974. Determine the dry unit weight on the basis of the total dry mass of the specimen and the interior dimensions of the specimen cylinder, measured to the nearest ~~0.02 cm~~ 0.2 mm (0.01 in.).

10. Calculation

10.1 The flow rate, Q/t , is determined as the slope of the straight line portion of the flow-rate plot, for each respective value of established constant head.

10.2 Calculate the hydraulic conductivity, k , as follows:

$$k = \frac{L}{A(\Delta H)} \times Q/t \quad (1)$$

where:

k = hydraulic conductivity, ~~e~~ m/s,

Q/t = rate of water outflow, ~~cm~~ m³/s,

A = cross-sectional area of specimen, ~~cm~~ m²,

L = length of specimen, ~~cm~~, m, and

ΔH = value of constant head, ~~cm~~, m, required to maintain a sustained flow rate, Q/t .

NOTE ~~9~~9—Units other than second (s), meter (m), etc. may be used provided an appropriate unit conversion factor is employed so that k is in m/s, or in other units, if requested or customary.

10.3 Correct values of hydraulic conductivity, k , at water temperature $T^\circ\text{C}$ to a reference temperature of 20°C (Note ~~8~~-8), 10), as follows:

$$k_{20} = k_T \left(\frac{\mu_T}{\mu_{20}} \right) \quad (2)$$

where:

k_{20} = hydraulic conductivity at 20°C ,

k_T = hydraulic conductivity at $T^\circ\text{C}$,

μ_T = viscosity of water at $T^\circ\text{C}$, and

μ_{20} = viscosity of water at 20°C .⁸

NOTE ~~8~~10—Considering the magnitude of influences from other factors, such as sample disturbance and gas content, on the accuracy of the result, this correction is of minor consequence and may, therefore, be considered optional.

11. Report

11.1 The report shall include the following:

11.1.1 Project identification, location and visual description of the specimen, including peat classification,

11.1.2 Height and diameter of the specimen,

11.1.3 Dry unit weight and moisture content,

11.1.4 Water temperature at the time of testing,

11.1.5 Plots of the relationship between cumulative flow volume and time, and tabulation of flow rates and corresponding values of constant head that the specimen was subject to, and

⁸ Values of the viscosity of water, μ , may be obtained from *International Critical Tables*, Vol 5, McGraw-Hill, New York, NY, 1929. Values of μ are also published in most laboratory testing manuals.

11.1.6 Tabulation of calculated values of the hydraulic conductivity, with a plot of the relationship between hydraulic conductivity and test gradient $\Delta H/L$.

11.2 *Remarks*—Note any unusual conditions or other information, such as type of water used, that could be considered necessary to interpret properly the results obtained.

12. Precision and Bias

~~12.1 Undisturbed specimens from apparently homogeneous peat deposits at the same location often exhibit significantly different hydraulic conductivity properties due to variations in material composition and sampling procedure.~~

~~12.2—~~

12.1 Precision—The subcommittee—Test data on precision is not presented due to the nature of the peat and highly organic soil materials tested by this method. It is either not feasible or too costly at this time to have ten or more laboratories participate in a round-robin testing program. In addition, it is either not feasible or too costly to produce multiple specimens that have uniform physical properties. Any variation observed in the data is just as likely to be due to specimen variation as to operator or laboratory testing variation.

12.1.1 Subcommittee D18.04 is seeking pertinent any data from the users of the this test method that might be used to determine the precision make a limited statement of this test method.

~~12.3— precision.~~

12.2 Bias—Since there—There is no accepted reference material suitable value for determining the this test method, therefore, bias for the procedure, bias has can not been be determined.

13. Keywords

13.1 constant-head permeability; hydraulic conductivity; peat; permeability; rigid-wall permeameter; saturated peat

SUMMARY OF CHANGES

In accordance with Committee D18 policy, this section identifies the location of changes to this standard since the 1992 (Reapproved 1996) edition that may impact the use of this standard.

- (1) Revised Footnote 1 to reflect change in jurisdiction from Subcommittee D18.18 to D18.04.
- (2) In Scope, added new paragraph 1.4 referencing the requirements of Practice D 6026 on significant digits and rounding, and subparagraph 1.4.1 pointing out the disconnect between the significant digits in the data being collected and that which can be applied in design. Renumbered existing 1.4.
- (3) In Referenced Documents, Section 2, added Practice D 3740, Specification D 4753, and Practice D 6026, with new footnote referencing Annual Book of ASTM Standards, Vol. 04.09. Renumbered subsequent footnotes.
- (4) Revised existing footnote 4 to reflect that the Peat Testing Manual is out of print.
- (5) In Terminology, Section 3, reworded paragraph 3.1.
- (6) At the end of Significance and Use, Section 4, inserted old 12.1 as 4.3. Added Note 1 referencing Practice D 3740. Renumbered subsequent notes.
- (7) In Apparatus, Section 7, reworded paragraph 7.2 giving reference to Specification D 4753.
- (8) In 10.2 changed units to SI units, and added Note 9 to allow measurements in other units. Renumbered subsequent note.
- (9) Precision and Bias, Section 12, was reworded to comply with Committee D18 policy where formal precision data are unavailable.

ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.

This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.

This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or service@astm.org (e-mail); or through the ASTM website (www.astm.org).