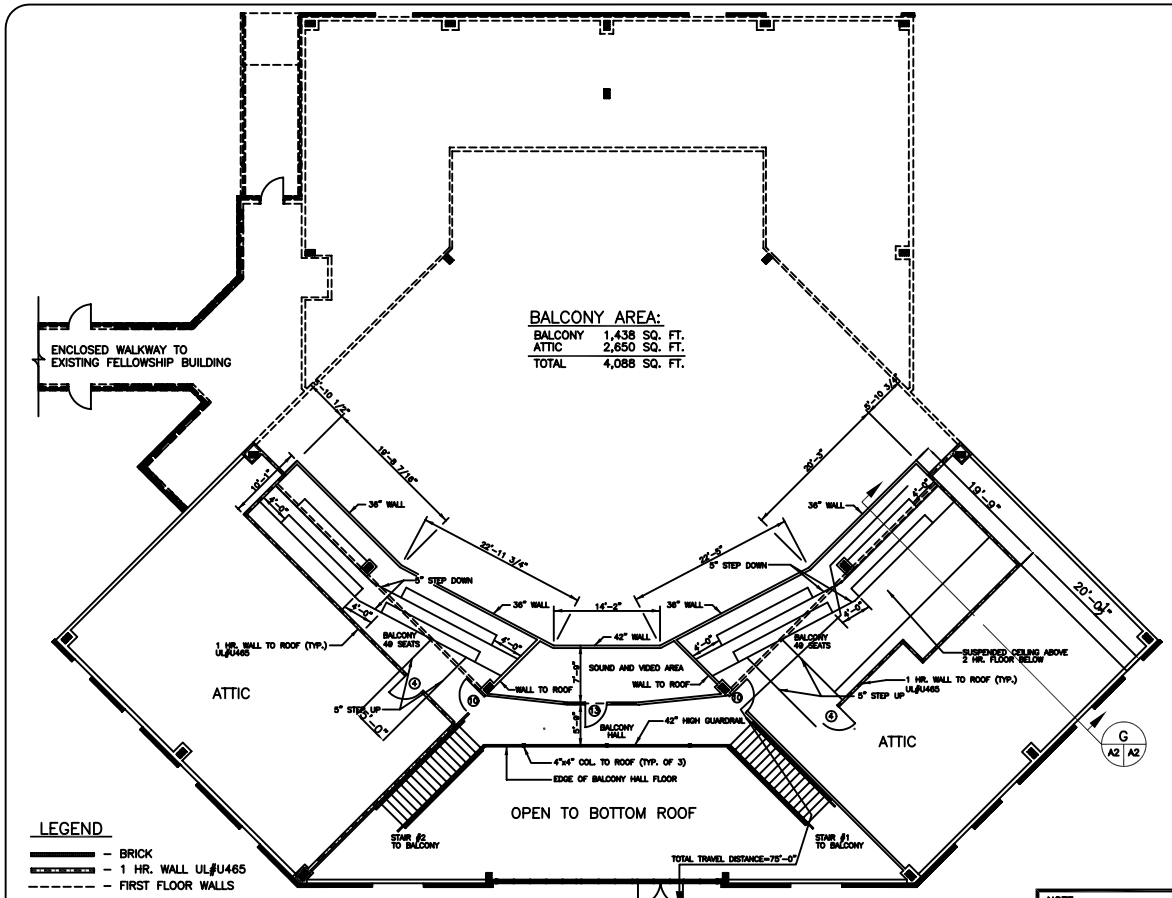

BALCONY PLAN
SCALE: 1/8"=1'-0"

LEGEND
- BRICK
- 1 HR. WALL UL#U465
- FIRST FLOOR WALLS
- BALCONY WALLS

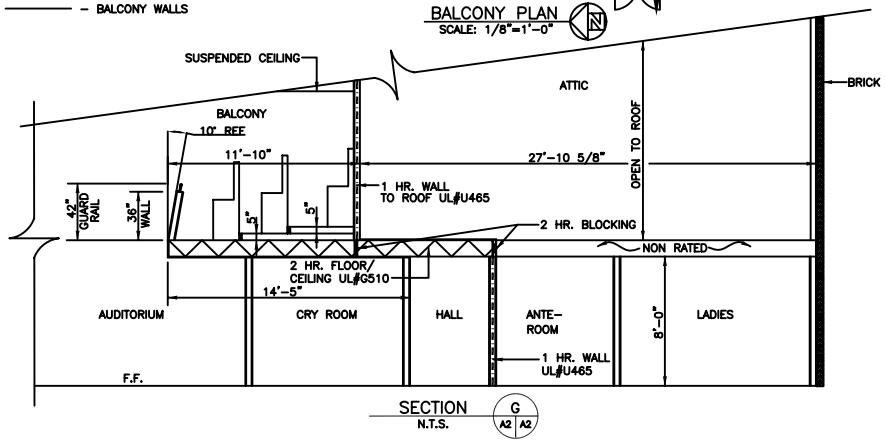

SECTION
N.T.S.
G A2 A2

NOTE
ALL METAL EXTERIOR DOORS SHALL MEET 130 MPH WIND LOAD SPECIFICATIONS.

DETAILED BUILDING REQUIREMENTS
(MAIN WIND FORCE RESISTING COMPONENTS)

- THE DESIGN, FABRICATION AND ERECTION OF STRUCTURAL STEEL FOR BUILDINGS AND STRUCTURES SHALL BE IN ACCORDANCE WITH EITHER THE AISC LOAD AND RESISTANCE FACTOR DESIGN SPECIFICATION FOR STRUCTURAL STEEL BUILDINGS (AISC-LRFD), AISC SPECIFICATION FOR STRUCTURAL STEEL BUILDINGS-ALLOWABLE STRESS DESIGN (AISC-ASD) OR AISC SPECIFICATION FOR THE DESIGN OF STEEL HOLLOW STRUCTURAL SECTIONS (AISC-HSS). WIND LOAD DESIGN OF 130 MPH.
- ROOF COVERING HAS BEEN DESIGNED IN ACCORDANCE WITH THE REQUIRMENTS SET FORTH IN IBC SECTION 1507
- MASONRY VENEER HAS BEEN DESIGNED IN ACCORDANCE WITH THE REQUIREMENTS SET FORTH IN IBC CHAPTER 21
- VINYL SIDING SHALL CONFORM TO THE REQUIREMENTS OF ASTM D3679 (IBC 1404.9)
- 1609.1.4 PROTECTION OF OPENINGS
- 7/16" THICK STRUCTURAL WOOD PANELS AND ATTACHMENT HARDWARE SHALL BE PROVIDED FOR BUILDING OCCUPANCY THE PANELS SHALL BE NUMBERED FOR EACH GLAZED OPENING AND SHALL BE STORED ON SITE PERMANENTLY (IBC 1609.1.4, EXCEPTION)

CONTRACTOR NOTE!
EACH CONTRACTOR RESPONSIBLE FOR THE CONSTRUCTION OF A MAIN WIND-FORCE-RESISTING COMPONENT OF THIS BUILDING SHALL SUBMIT A WRITTEN CONTRACTOR'S STATEMENT OF RESPONSIBILITY TO THE BUILDING OFFICIAL AND OWNER PRIOR TO COMMENCEMENT OF THE WORK ON THAT COMPONENT. (IBC 1706.3)

ROOM FINISH SCHEDULE

NAME	FLOOR: CARPET	FLOOR: VINYL TILE	FLOOR: CERAMIC TILE	BASE: WOOD	BASE: CERAMIC TILE	WALL: PAINT	WALL: CERAMIC TILE	CEILING: ACOUSTIC	CEILING: CLG. HGT.	REMARKS
FOYER		●		●		●		●	VAULTED	
CORRIDORS		●		●		●		●	8'-0"	
MECH./ STORAGE	●			●		●		●	8'-0"	
ASSOC. MINISTER	●			●		●		●	8'-0"	
CLERKS OFFICE	●			●		●		●	8'-0"	
LIBRARY/ COPY	●		●	●		●		●	8'-0"	
PASTOR'S STUDY	●			●		●		●	8'-0"	
RESTROOMS			●		●	●		●	8'-0"	GREEN GYP. BD.
CONFERENCE ROOM	●			●		●		●	8'-0"	
KITCHEN		●		●		●		●	8'-0"	
LINNEN ROOM		●		●		●		●	8'-0"	
JANITOR		●		●		●		●	8'-0"	
NURSERY	●			●		●		●	8'-0"	1 HR. FIRE WALL
ANTE ROOM	●			●		●		●	8'-0"	
CRY ROOM	●			●		●		●	8'-0"	2 HR. CEILING ABOVE
GEAR STORAGE		●		●					8'-0"	1 HR. CEILING & WALL
VAN GARAGE		●				●	●	●	8'-0"	
MUD ROOM		●		●		●		●	8'-0"	
BAPISTERY	●			●		●		●	8'-0"	GREEN GYP. BD.
BACKSTRY. STAIRS	●			●		●		●	8'-0"	
MUSICIAN ROOM	●			●		●		●	8'-0"	
CHANGE ROOMS		●		●		●		●	8'-0"	
CHOIR ROOM	●			●		●		●	8'-0"	
FOYER/ MUD RM. STAIRS			●		●			●	8'-0"	WOOD RISERS, TREADS, BEAMS, RAILS
AUDITORIUM	●			●		●		●	VAULTED	
BALCONY	●			●		●		●	VAULTED	
OFFICE RESTROOMS			●		●	●		●	8'-0"	

DOOR & HARDWARE SCHEDULE

QTY	NO.	SIZE	TYPE: PANEL MAT.	TYPE: HOLLOW METAL	TYPE: ALUM.	TYPE: VERT. ROLLING	TYPE: BIRCH VENEER	FRAME: STEEL	FRAME: ALUMINUM	FRAME: WOOD	FRAME: GLASS OPENING	HINGE: DBL. SWING	HINGE: BUTT	HINGE: SURFACE/PIVOT	HINGE: SLIDING	LOCK: PASSAGE	LOCK: PRIVACY	LOCK: DEADBOLT	LOCK: KEYED HANDLE	LOCK: PUSH PULL	ACCESSORIES: PANIC	ACCESSORIES: THRESHOLD	ACCESSORIES: SLIDING STOP	ACCESSORIES: FULL GLASS	ACCESSORIES: MAG. RELEASE	ACCESSORIES: CLOSER	RATINGS	REMARKS
2	1	(2) 3/0 X 6/8 PR		●				●				●						●			●	●				●		*
6	2	3/0 X 6/8		●				●				●						●		●	●	●				●		SAFETY GLASS
1	3	3/0 X 6/8		●				●				●						●		●	●	●				●		1/0 X 6/8 SIDE LIGHT
2	4	3/0 X 6/8			●	●		●				●								●						●	1 HR. RATING	
6	5	3/0 X 6/8			●	●		●				●					●									●		6" X 28" GLASS SLIT
6	6	3/0 X 6/8			●	●		●				●					●									●	1 HR. RATING	
1	7	3/0 X 6/8			●		●	●				●														●		
1	8	3/0 X 6/8			●	●		●				●					●									●		
1	9	3/0 X 6/8			●	●		●				●						●			●					●		
28	10	3/0 X 6/8			●	●		●				●									●					●		HOT LOCKING IN EGRESS DIR.
1	11	3/0 X 6/8			●		●	●				●					●									●		WITH CENTER MULLION
1	12	(2) 2/10 X 6/8			●	●		●				●						●			●					●		
1	13	2/10 X 6/8			●	●		●				●									●					●		
1	14	3/0 X 6/8			●		●	●				●									●					●		
3	15	3/0 X 6/8			●		●	●						●							●					●		SLIDING CLOSET DOOR
1	16	6/0 X 7/0 PR			●		●	●				●									●					●		FOLDING CLOSET DOOR
1	17	3/0 X 6/8			●		●																					

*- PART OF 28'-0" WEX GLASS STOREFRONT- SEMI GLASS ALUMINATE TO MARK (1). ADD ETCHED CROSSES TO GLASS IN EACH DOOR.

WINDOW SCHEDULE

QTY	MK	SIZE	TYPE: FIXED	TYPE: VERT. SLIDE	TYPE: HORIZ. SLIDE	TYPE: CASEMENT	FRAME: STEEL	FRAME: VINYL	FRAME: WOOD	FRAME: ALUMINUM	GLASS: TINTED	GLASS: PLAIN	GLASS: INSULATED	GLASS: WIRED GLASS	GLASS: ALUM. PNLS.	LITES: 2/3	LITES: 1/3 LITES	LITES: NONE	ACCESS.: SCREEN	ACCESS.: SHUTTER	ACCESS.: NONE	ACCESS.: ALARM	ACCESS.: LOCK	REMARKS
22	A	3/0 X 6/0		●						●		●						●	●					
4	B	3/0 X 6/0		●						●		●						●						.75 *
4	C	3/0 X 6/0	●							●		●						●						**
3	D	8/0 X 7/0	●							●		●						●			●			W/ MULLION
45	E	3/0 X 3/0	●							●					●			●			●			***
3	F	(2) 3/0 X 3/0	●							●	●							●					●	****
1	G	8/0 X 3/0 X 1/4"	●							●	●							●						*****

*- WINDOW SHADES W/ REMOTE OPERATOR
**- FROSTED GLASS W/ SHADES
***- BRONZED ALUMINUM SHEET PANELS
****- 1" X 4" SHELF UNDERNEATH WINDOW
*****- FLEXGLASS, 12" X 1" TELLER OPENING AT BOTTOM OF WINDOW

REVISED: 04-29-05
REVISED: 05-16-05

SECOND LEVEL PLAN VIEW

STARLIGHT BAPTIST CHURCH
2100 SECOND STREET
SLIDELL, LOUISIANA

NEW SANCTUARY

DAMMON ENGINEERING, INC.
1095 FLORIDA AVENUE 985-649-5532 SLIDELL, LA. 70458
DAMMONENGINEERING.COM

SCALE:AS NOTED
FILE:
JOB NO. 1495a
DATE:05-16-05
SHEET A-2
OF