




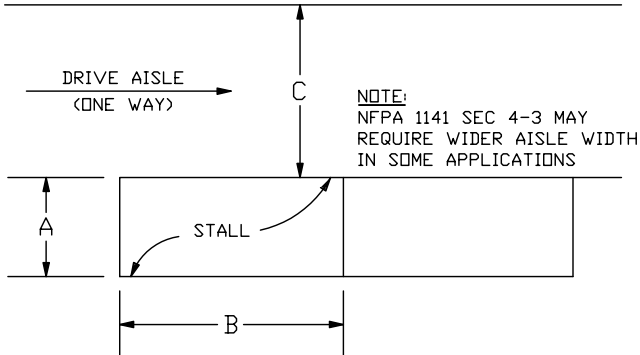


	"A"	"B"	"C"
PARALLEL PARKING	STALL WIDTH	STALL LENGTH	MIN. AISLE WIDTH
* (COMPACT)	* 8'-0"	20.0	10.0
	8'-6"	23.0	12.0
	9'-0"	23.0	12.0
	9'-6"	23.0	12.0
	10'-0"	23.0	12.0

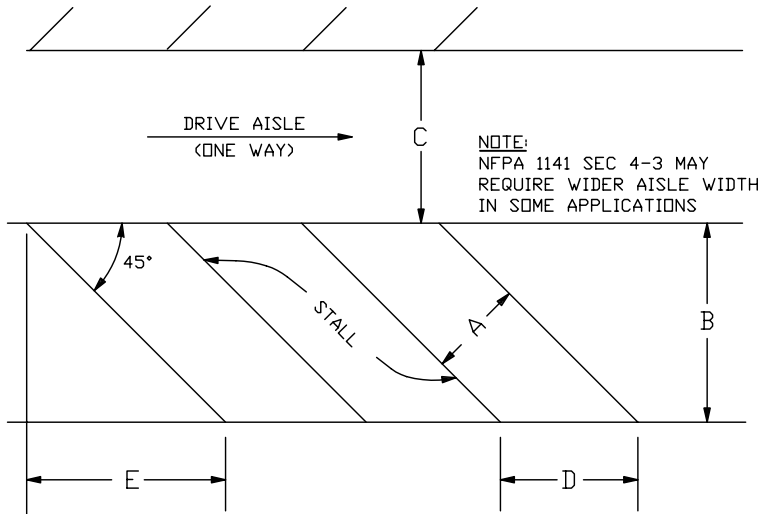

	"A"	"B"	"C"	"D"	"E"
PARKING ANGLE	STALL WIDTH	AISLE TO END OF STALL	MIN. AISLE WIDTH	STALL WIDTH ON SKEW	
45°					
* (COMPACT)	* 8'-0"	16.3	13.5	11.6	16.3
	8'-6"	19.4	13.5	12.0	19.4
	9'-0"	19.8	13.0	12.7	19.8
	9'-6"	20.1	13.0	13.4	20.1
	10'-0"	20.5	13.0	14.1	20.5

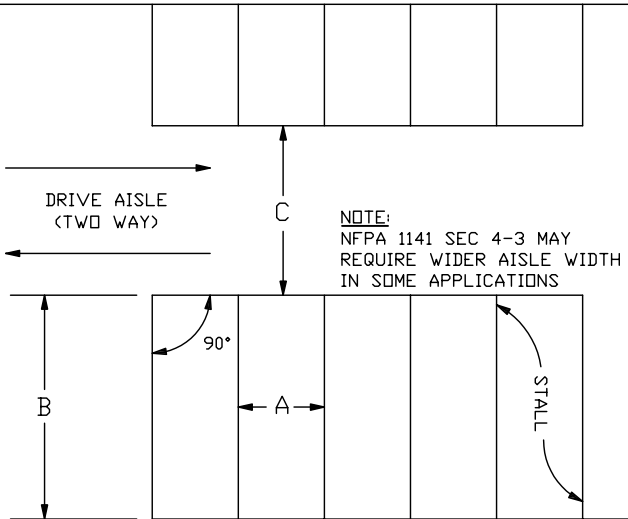

	"A"	"B"	"C"
PARALLEL PARKING 90°	STALL WIDTH	STALL LENGTH	MIN. AISLE WIDTH
* (COMPACT)	* 8'-0"	15.0	22.0
	8'-6"	19.0	25.0
	9'-0"	18.0	24.0
	9'-6"	18.0	24.0
	10'-0"	18.0	24.0

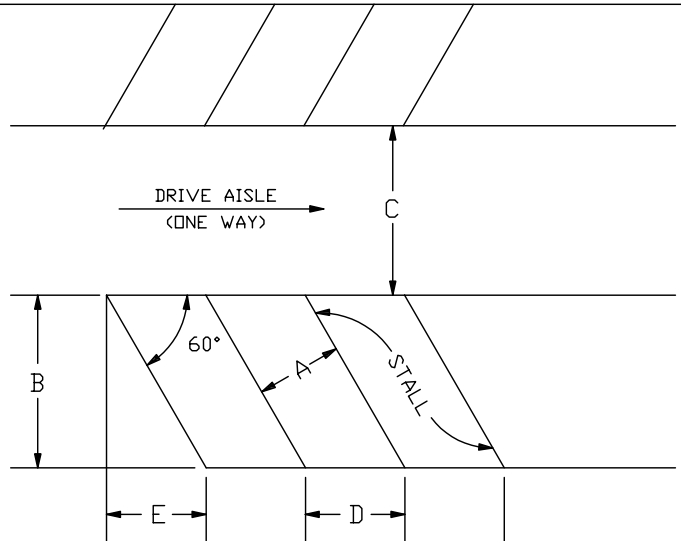


	"A"	"B"	"C"	"D"	"E"
PARKING ANGLE	STALL WIDTH	AISLE TO END OF STALL	MIN. AISLE WIDTH	STALL WIDTH ON SKEW	
60°					
* (COMPACT)	* 8'-0"	17.0	18.5	9.4	10.1
	8'-6"	20.7	18.5	9.8	11.9
	9'-0"	21.0	18.0	10.4	12.12
	9'-6"	21.2	18.0	11.0	12.24
	10'-0"	21.5	18.0	11.5	12.41


*APPLIES ONLY TO COMPACT PARKING SPACES. SEE COMPREHENSIVE ZONING ORDINANCE.

WHEN THE END OF PARKING STALL ABUTS THE RIGHT OF WAY LINE, OR SIDEWALK SERVITUDE LINE, USE DETAIL "A" OR "B".

DETAIL "A" OR "B" WILL ALSO APPLY IN CASES WHEN PARKING STALL DOES NOT ABUT THE RIGHT OF WAY LINE OR SIDEWALK SERVITUDE LINE, BUT IS WITHIN 10 FEET OF SAID LINE.

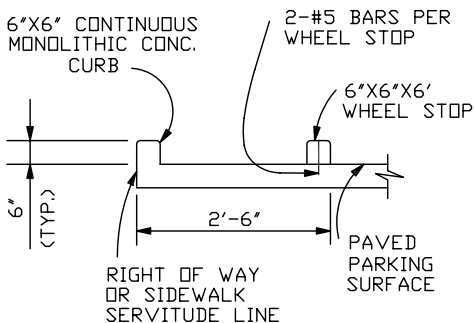

DETAIL "A"

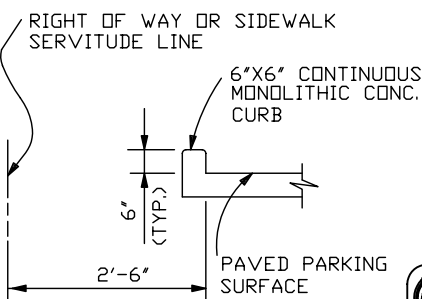

DETAIL "B"

COMMERCIAL PLAN
OF DETAIL NO. 3



JEFFERSON PARISH
DEPARTMENT OF ENGINEERING

TYPICAL SPACE REQUIREMENTS FOR SELF-PARKING AT VARIOUS ANGLES					
DRAWN BY:	T.V.C.	DATE:	08/12/93	REVISD BY:	L.V.H.
REVISD BY:	L.V.H.	DATE:	10/01/98	REVISD BY:	L.V.H.
TOP TO AUTOCAD:	H.J.W.	DATE:	02/11/05	REVISD BY:	H.J.W.
REVISD BY:	C.H.S.	DATE:	01/27/09	REVISD BY:	-
FILE NUMBER:	ENV-09				
SCALE:	N.T.S.				

PARKING STALLS MUST BE STRIPED WITH A FOUR (4) INCH CONTRASTING STRIPE (YELLOW ON CONCRETE AND YELLOW OR WHITE ON ASPHALT PARKING LOT).