

LUS/HUS/HHUS/HGUS Double Shear Joist Hangers



This product is preferable to similar connectors because of a) easier installation, b) higher loads, c) lower installed cost, or a combination of these features.

See Hanger tables on pages 77-82. See Hanger Options on pages 233-243 for hanger modifications, which may result in reduced loads.

All hangers in this series have double shear nailing. This innovation distributes the load through two points on each joist nail for greater strength. It also allows the use of fewer nails, faster installation, and the use of standard nails for all connections. (Do not bend or remove tabs.)

MATERIAL: See tables, pages 77-82.





FINISH: Galvanized. Some products available in stainless steel or ZMAX® coating; see Corrosion Information, pages 13-15.

INSTALLATION • Use all specified fasteners. See General Notes.

- Nails must be driven at an angle through the joist or truss into the header to achieve the table loads.
- Not designed for welded or nailer applications.
- 16d sinkers (0.148" dia. x 3 1/4" long) may be used where 10d commons are specified with no reduction in load. Where 16d commons are specified, 10d commons or 16d sinkers (0.148" dia. x 3 1/4" long) may be used at 0.85 of the table load.
- With 3x carrying members, use 16dx2 1/2" nails into the header and 16d commons into the joist with no load reduction.
- With 2x carrying members, use 10dx1 1/2" nails into the header and 10d commons into the joist, reduce the load to 0.64 of the table value.
- Use stainless-steel (SS) nails with stainless-steel (SS) hangers.

OPTIONS: • LUS hangers cannot be modified.

- HUS hangers available with the header flanges turned in for 2-2x (3 1/8") and 4x only, with no load reduction. See the HUSC Concealed Flange illustration.

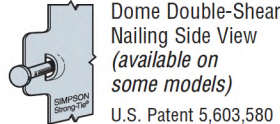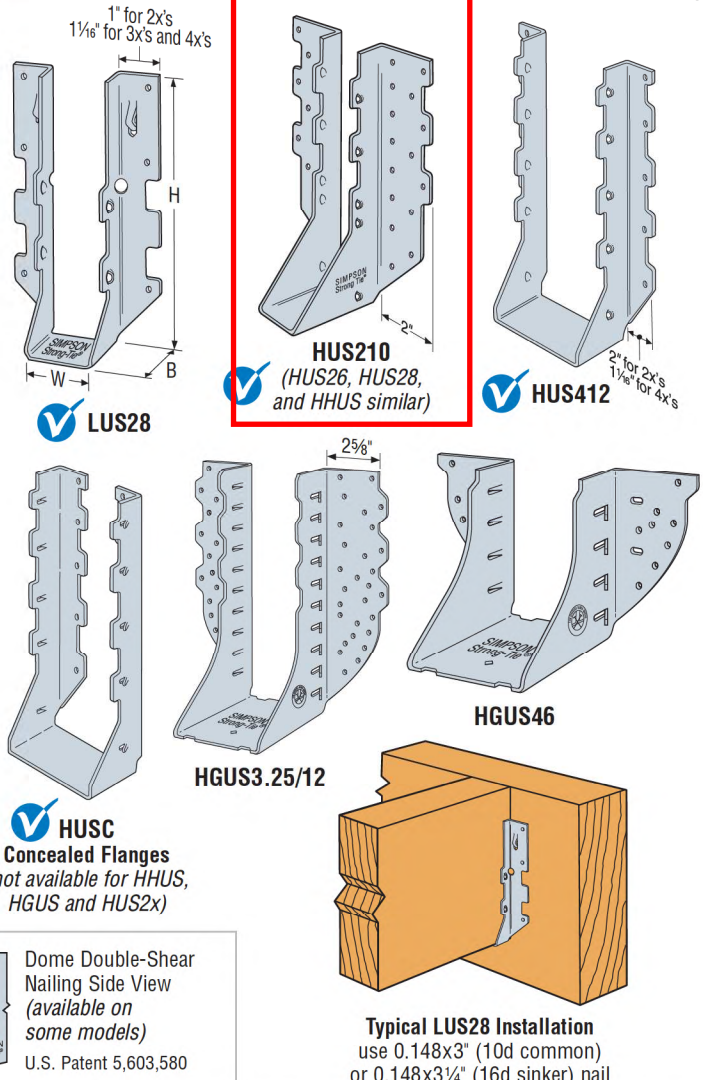

FACE MOUNT HANGERS – SOLID SAWN LUMBER (DF/SP)

These products are available with additional corrosion protection. Additional products on this page may also be available with this option, check with Simpson Strong-Tie for details.

These products are approved for installation with the Strong-Drive® SD Connector screw. See page 27 for more information.

Joist Size	Model No.	Ga	Dimensions (in.)			Min/Max	Fasteners		DF/SP Allowable Loads				Installed Cost Index (ICI)	Code Ref.
			W	H	B		Header	Joist	Uplift (160)	Floor (100)	Snow (115)	Roof (125)		
SAWN LUMBER SIZES														
2X4	LUS24	20	1 1/16	3 3/8	1 1/2	—	4-16d	2-10dx1 1/2	265	555	635	685	Lowest	17, I27, F6, L5, L17
	LUS24	18	1 1/16	3 3/8	1 3/4	—	4-10d	2-10d	490	670	765	825	+3%	
	U24	16	1 1/16	3 3/8	1 1/2	—	4-16d	2-10dx1 1/2	265	575	655	705	+67%	
	HU26	14	1 1/16	3 1/16	2 1/4	—	4-16d	2-10dx1 1/2	335	595	670	720	+295%	
DBL 2X4	LUS24-2	18	3 1/8	3 3/8	2	—	4-16d	2-16d	440	800	910	985	Lowest	17, I27, F6, L5, L17
	U24-2	16	3 1/8	3	2	—	4-16d	2-10d	370	575	655	705	+33%	
	HU24-2/HUC24-2	14	3 1/8	3 1/16	2 1/2	—	4-16d	2-10d	380	380	595	720	+240%	
2x6	LUS26	18	1 1/16	4 3/4	1 3/4	—	4-10d	4-10d	1165	865	990	1070	Lowest	17, I27, F6, L5, L17
	LU26	20	1 1/16	4 3/4	1 1/2	—	6-16d	4-10dx1 1/2	565	835	950	1030	+6%	
	U26	16	1 1/16	4 3/4	2	—	6-16d	4-10dx1 1/2	585	865	980	1055	+43%	
	LUC26Z	18	1 1/16	4 3/4	1 3/4	—	6-16d	4-10dx1 1/2	730	845	965	1040	+160%	
	HU26	14	1 1/16	3 1/16	2 1/4	—	4-16d	2-10dx1 1/2	335	335	595	720	+179%	
	HUS26	16	1 1/8	5 3/8	3	—	14-16d	6-16d	1550	2720	3095	3335	+276%	
DBL 2X6	LUS26-2	18	3 1/8	4 7/8	2	—	4-16d	4-16d	1165	1030	1180	1280	Lowest	17, I27, F6, L5, L17
	U26-2	16	3 1/8	5	2	—	8-16d	4-10d	740	1150	1305	1410	+65%	
	HUS26-2/HUSC26-2	14	3 1/8	5 3/16	2	—	4-16d	4-16d	1235	1065	1210	1305	+172%	
	HU26-2/HUC26-2	14	3 1/8	5 3/8	2 1/2	Min	8-16d	4-10d	760	1190	1345	1445	+233%	
	HU26-2/HUC26-2	14	3 1/8	5 3/8	2 1/2	Max	12-16d	6-10d	1135	1785	2015	2165	+254%	