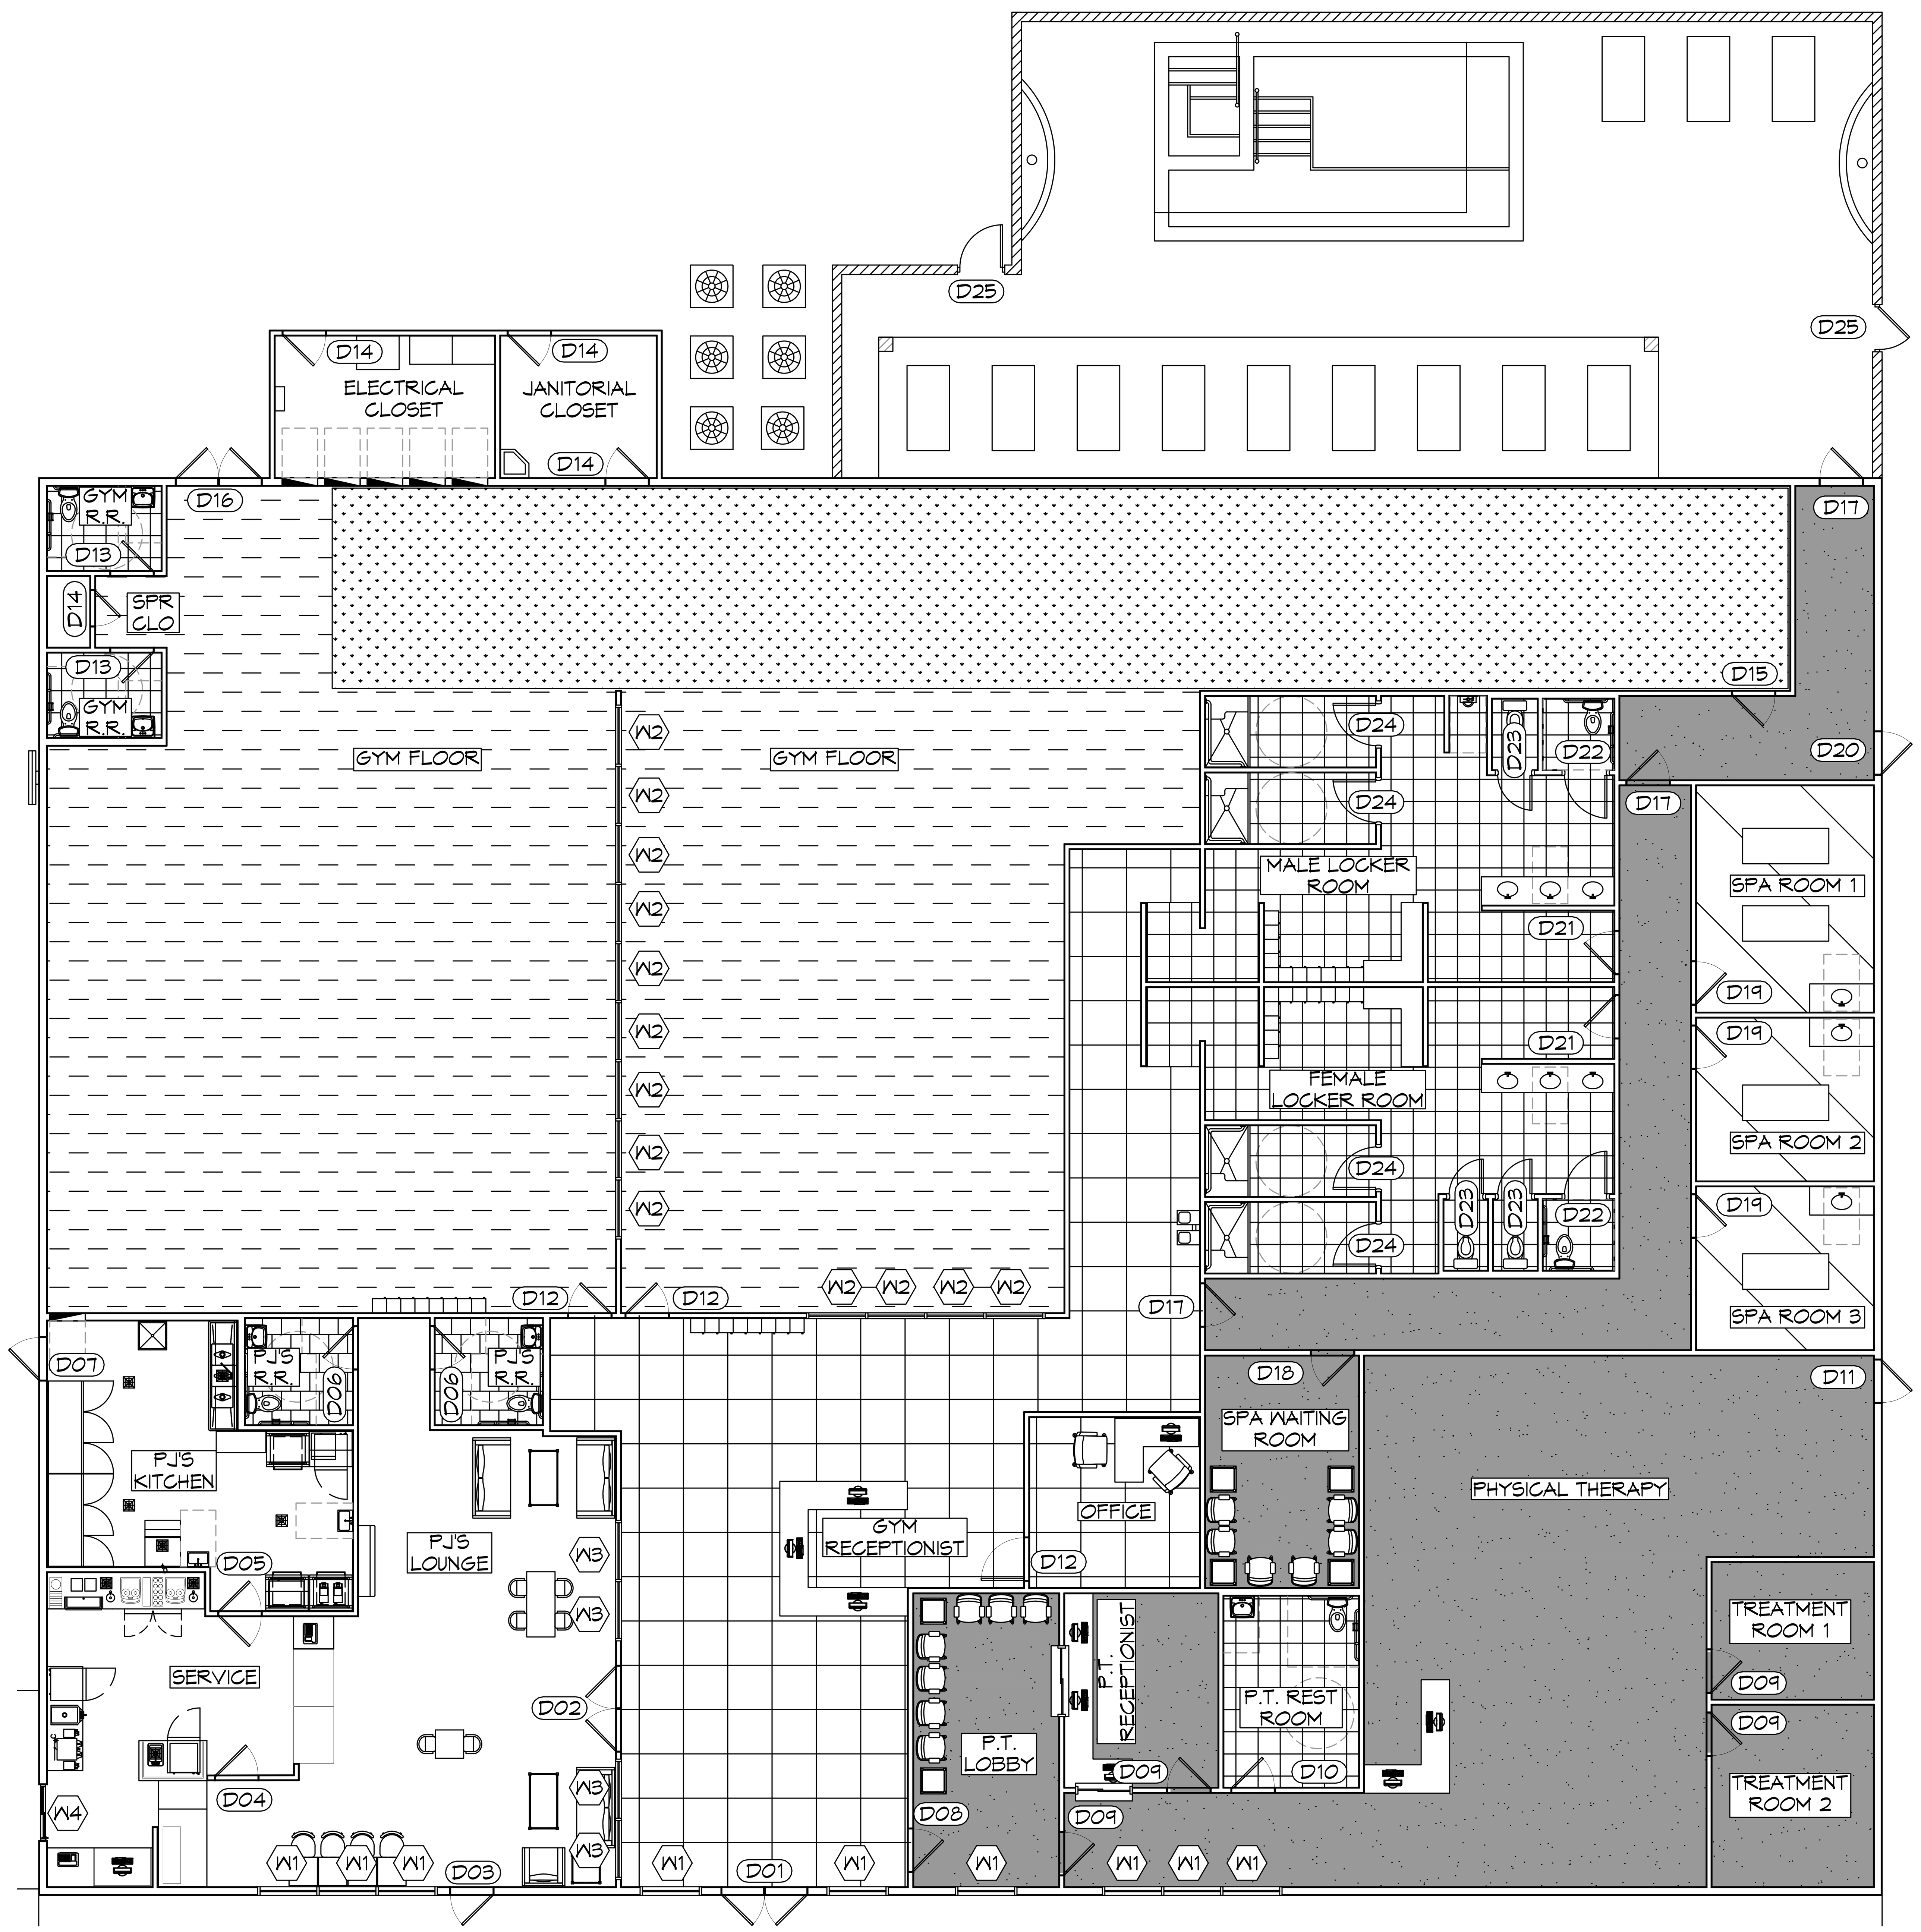

10 FINISH FLOOR PLAN AND DOOR SCHEDULE
SCALE: 1/8" = 1'-0"

DOOR SCHEDULE

MK	WIDTH	HGT	THK	DOOR MAT	FRAME MAT	LOCATION	REMARKS
D01	(2) 3'-0"	7'-0"	1-3/4"	GLASS	STEEL	MAIN FRONT ENTRY	FRONT DOUBLE DOOR W/ CLOSURE
D02	(2) 3'-0"	7'-0"	1-3/4"	GLASS	STEEL	PJ'S INTERIOR ENTRY	SIDE DOUBLE DOOR W/ CLOSURE
D03	3'-0"	7'-0"	1-3/4"	GLASS	STEEL	PJ'S EXTERIOR ENTRY	FRONT DOOR W/ CLOSURE
D04	3'-0"	7'-0"	1-3/4"	WOOD	STEEL	PJ'S SERVICE DOOR	
D05	3'-0"	7'-0"	1-3/4"	METAL	STEEL	PJ'S KITCHEN DOOR	DOUBLE ACTION DOOR
D06	3'-0"	7'-0"	1-3/4"	SC WOOD	STEEL	PJ'S RESTROOM	W/ CLOSER
D07	3'-0"	7'-0"	1-3/4"	METAL	STEEL	PJ'S BACK DOOR	W/ CLOSER
D08	3'-0"	7'-0"	1-3/4"	GLASS	STEEL	P.T. LOBBY ENTRANCE	
D09	3'-0"	7'-0"	1-3/4"	WOOD	STEEL	P.T. ROOMS	
D10	3'-0"	7'-0"	1-3/4"	WOOD	STEEL	P.T. RESTROOM	W/ CLOSER
D11	3'-0"	7'-0"	1-3/4"	GLASS	STEEL	P.T. BACK DOOR	W/ CLOSER
D12	3'-0"	7'-0"	1-3/4"	GLASS	STEEL	GYM & OFFICE DOOR	
D13	3'-0"	7'-0"	1-3/4"	WOOD	STEEL	GYM RESTROOM	W/ CLOSER
D14	3'-0"	7'-0"	1-3/4"	METAL	STEEL	UTILITY ROOM DOORS	
D15	3'-0"	7'-0"	1-3/4"	METAL	STEEL	TURF DOOR	FIRE EXIT DOOR
D16	3'-0"	7'-0"	1-3/4"	GLASS	STEEL	MAIN BACK DOOR	DOUBLE DOOR WITH CLOSER
D17	3'-0"	7'-0"	1-3/4"	METAL	STEEL	HALLWAY TO POOL	
D18	3'-0"	7'-0"	1-3/4"	GLASS	STEEL	SPA WAITING ROOM	
D19	3'-0"	7'-0"	1-3/4"	WOOD	STEEL	SPA ROOM 1-3	
D20	3'-0"	7'-0"	1-3/4"	GLASS	STEEL	SPA BACK DOOR	EXIT DOOR W/ CLOSER
D21	3'-0"	7'-0"	1-3/4"	WOOD	STEEL	LOCKER ROOM ENTRY DOOR	W/ CLOSER
D22	3'-0"	7'-0"	1-3/4"	WOOD	STEEL	ADA WATER CLOSET DOOR	W/ CLOSER
D23	2'-6"	7'-0"	1-3/4"	WOOD	STEEL	WATER CLOSET DOOE	W/ CLOSER
D24	3'-0"	7'-0"	1-3/4"	METAL	STEEL	SHOWER DOOR	W/ CLOSER
D25	3'-0"	7'-0"	1-3/4"	STEEL	STEEL	EXTERIOR POOL GATE	GATE DOOR

NOTE:
DOORS IN A REQUIRED MEANS OF EGRESS SERVING ANY ASSEMBLY AREA HAVING AN OCCUPANT LOAD OF 50 OR MORE PERSONS SHALL NOT BE EQUIPPED WITH A LATCH OR LOCK OTHER THAN PANIC HARDWARE OR FIRE EXIT HARDWARE. DOORS SHALL BE RATED FOR 130 MPH WINDS.

WINDOW SCHEDULE

MARK	WIDTH	HEIGHT	TYPE	REMARKS
W1	4'-0"	9'-0"	EXT STORE FRONT	
W2	4'-0"	12'-0"	INT STORE FRONT	
W3	4'-0"	8'-0"	INT STORE FRONT	
W4	4'-0"	3'-6"	DRIVE THRU	

NOTE:
ALL WINDOW ASSEMBLES TO BE RATED FOR 130 MPH WINDS AND SHALL BE MISSILE IMPACT RESISTANT.

FINISH FLOOR LEGEND

- BAMBO
- RUBBER MAT
- CERAMIC TILE
- CERAMIC TILE (SMALL)
- TURF
- CARPET
- STAINED CONCRETE
- 1X1 TILE REFER TO PJ'S COFFEE FINISH SCHEDULE

DAMMON ENGINEERING, INC.
LOUISIANA & MISSISSIPPI
Chief Engineer: Brian Mistich, PE
554 Old Spanish Trail
Slidell, LA 70458
www.dammonengineering.com
info@dammonengineering.com
PH: 985.649.5832

REVISIONS

#	DESCRIPTION	DATE

SEAL:

NEW ATHLETIC CLUB
PRESTIGE FITNESS CLUB AND SPA
4422 KALANI DRIVE
HANCOCK COUNTY, MISSISSIPPI

JOB No:		DATE:	12-21-2021
DRAWN BY:	CKD	CHECKED BY:	CKD

The above drawings and specifications, designs and arrangements represented thereby are and shall remain the property of Dammon Engineering, and no part thereof shall be copied, disclosed to others, or used in connection with any work or project other than the specific project for which the have been prepared and developed without written consent of Dammon Engineering. Visual contact with these drawings or specifications shall constitute conclusive evidence of acceptance of these restrictions.

SHEET TITLE:
FINISH FLOOR PLAN

DRAWING NUMBER:
A108

SHEET No: 11 of