

CONTRACTOR SHALL NOTE THAT HATCHING PARKING AREA SURF AND ACCESS PATH SLOPE (SLOPES TO MAIN ENTRANCE DOOR) SHALL NOT EXCEED 2% IN ANY DIRECTION. (TYPICAL) VERTY ELEVATIONS.

DETECTABLE WARNING

SECTION 1108

DETECTABLE WARNING ON WALKING SURFACE


1108.1 GENERAL. DETECTABLE WARNING SHALL CONSIST OF RAISED TRUNCATED DOMES ALIGNED IN A SQUARE GRID PATTERN AND SHALL COMPLY WITH 1108.

1108.1.1 DOME SIZE. TRUNCATED DOMES IN A DETECTABLE WARNING SURFACE SHALL HAVE A BASE DIAMETER OF 0.8 INCHES (20MM) MINIMUM TO 1.4 INCHES (35 MM) MAXIMUM, A TOP DIAMETER OF 50% OF THE BASE DIAMETER MINIMUM TO 65% OF THE BASE DIAMETER MAXIMUM, AND A HEIGHT OF 0.2 INCHES (5MM).

1108.1.2 DOME SPACING. TRUNCATED DOMES IN A DETECTABLE WARNING SURFACE SHALL BE SPACED SUCH THAT THE CLEARANCE BETWEEN ADJACENT DOMES SHALL BE 4 INCHES (101.6 MM) MINIMUM, AND A BASE-TO-BASE SPACING OF 0.85 INCHES (21.6 MM) MINIMUM.

1108.1.3 CONTRAST. DETECTABLE WARNING SURFACES SHALL CONTRAST VISUALLY WITH ADJACENT WALKING SURFACES EITHER LIGHT-ON-DARK, OR DARK-ON-LIGHT.

1108.1.4 SIZE. DETECTABLE WARNING SURFACES SHALL EXTEND 36 INCHES (915 MM) MINIMUM IN THE DIRECTION OF TRAVEL AND THE FULL WIDTH OF THE CURB RAMP, LANDING, OR SURFACE WITH WHICH THE SECTION OF THE ROAD, LOCAL JURISDICTION AND/OR LATEST REGION.

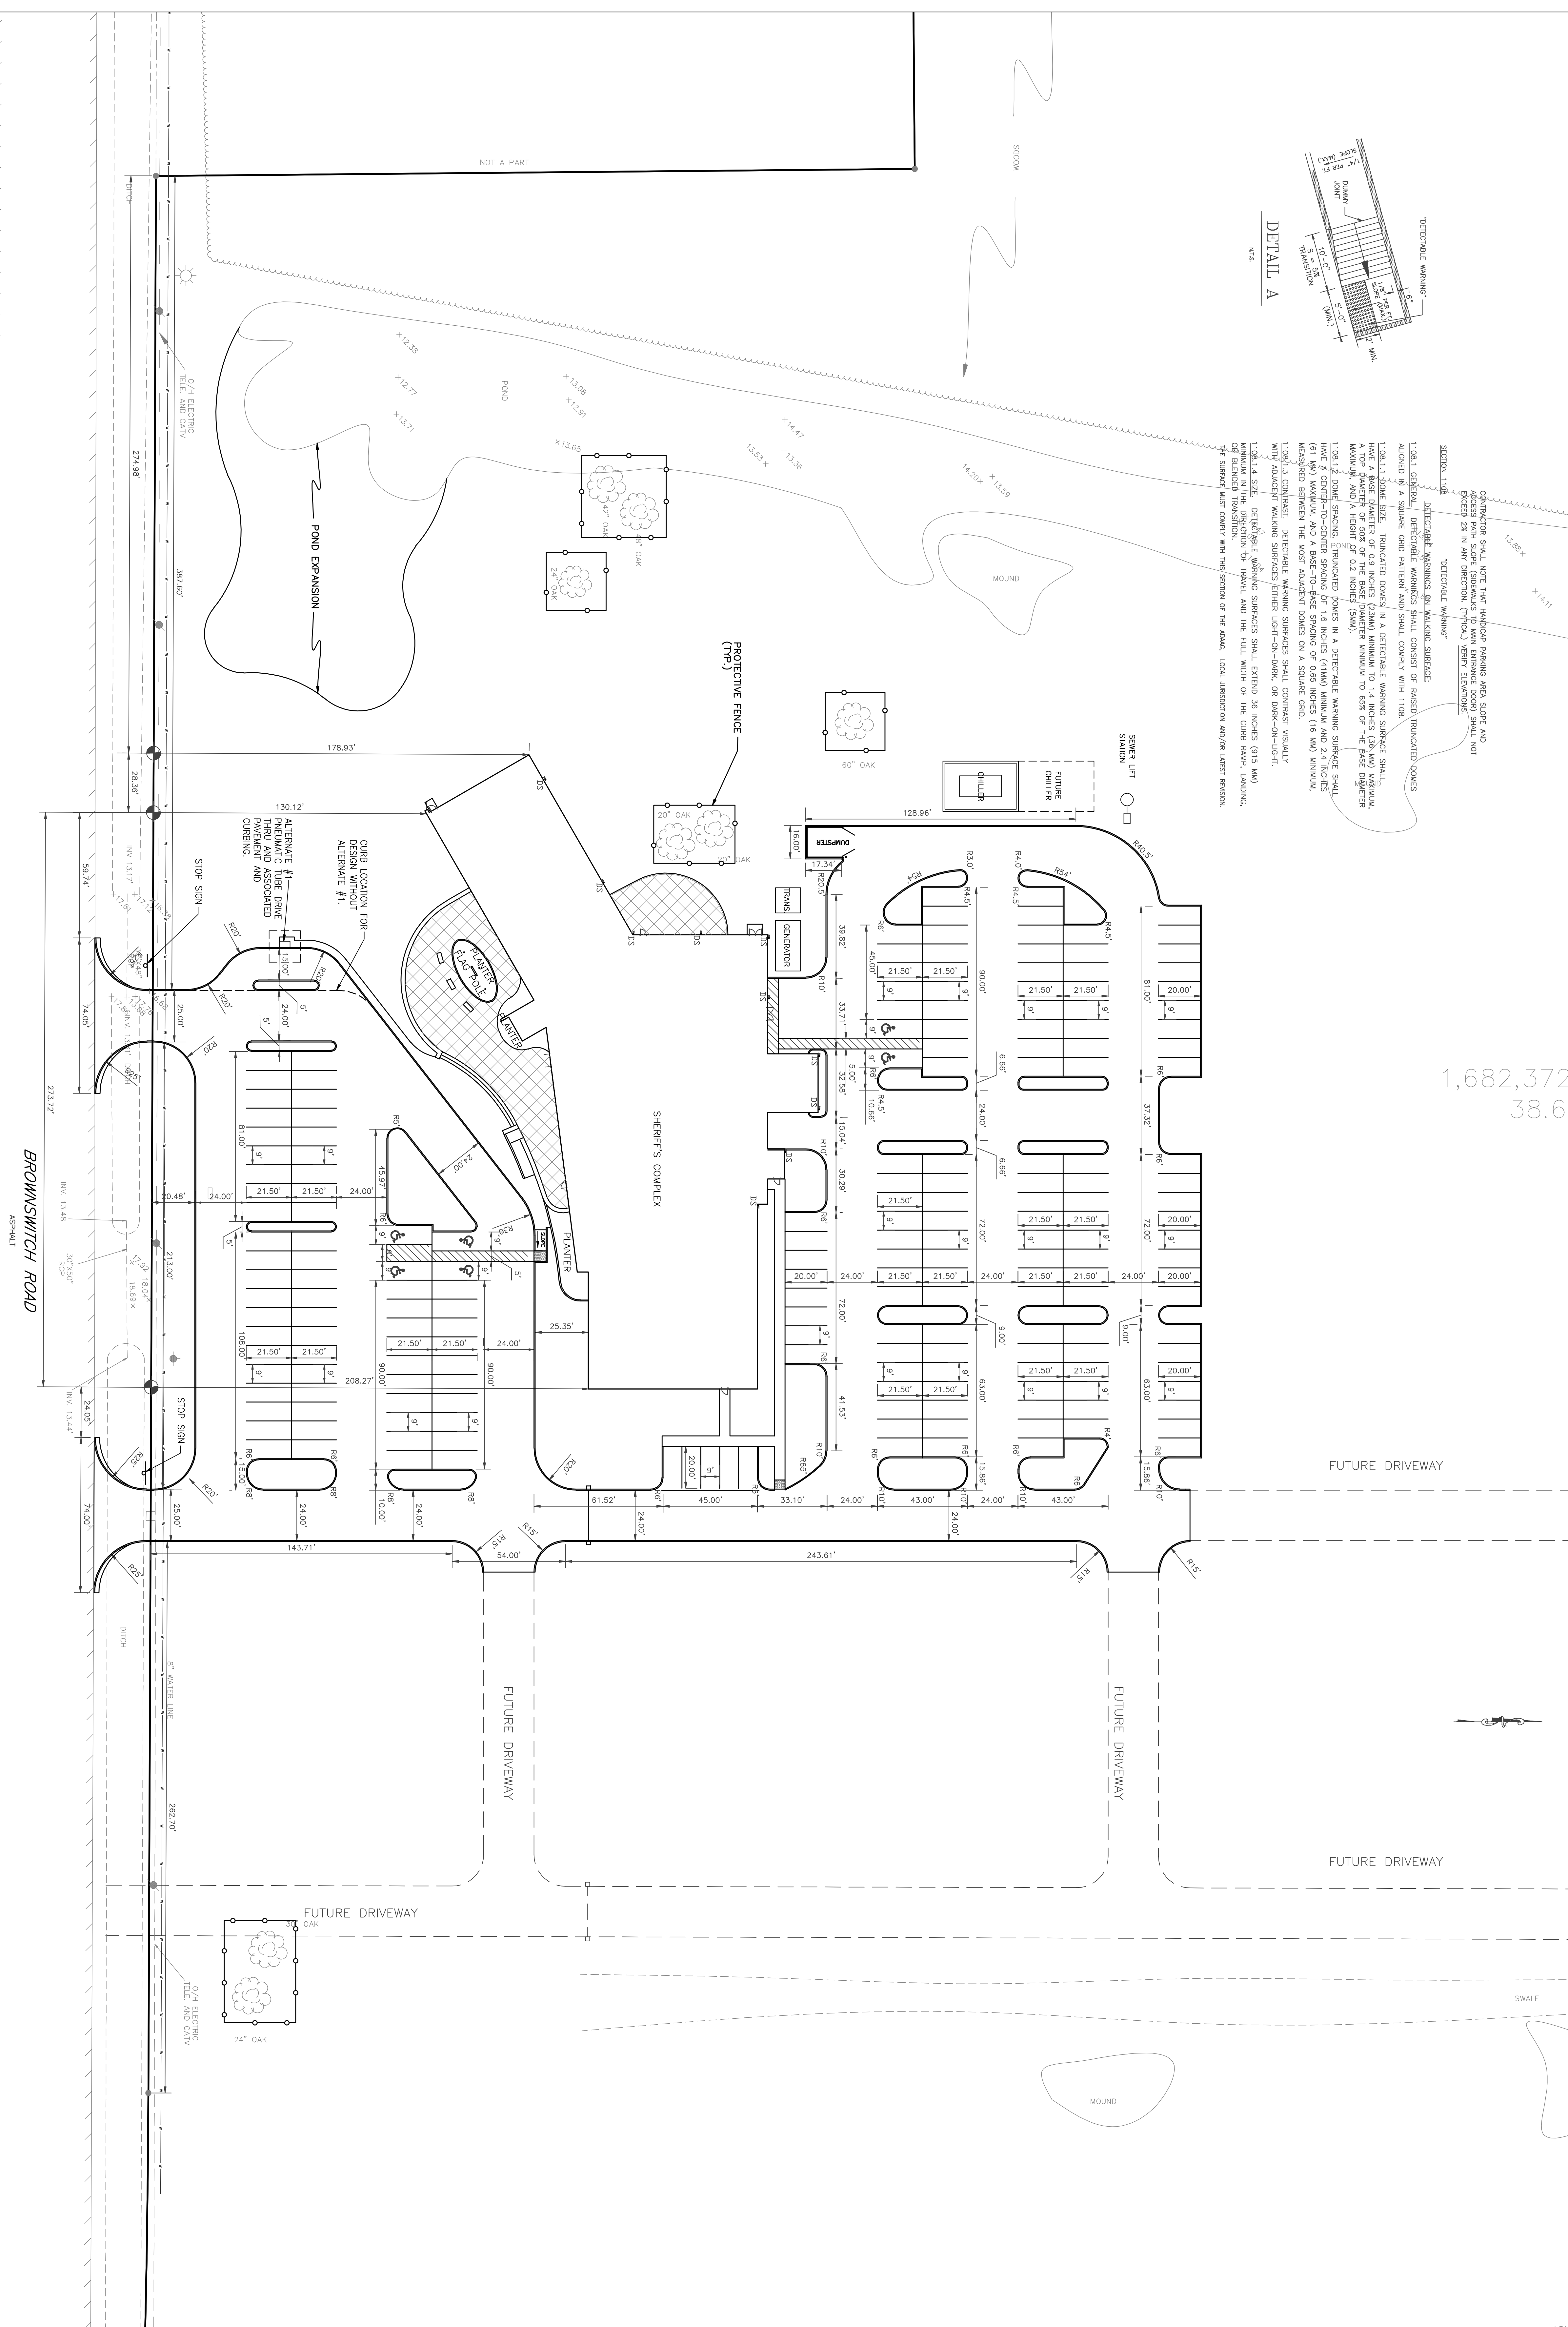

1,682,372  
38.6

SCALE: 1" = 30'

Copyright 2007

# ST. TAMMANY PARISH SHERIFF'S OFFICE

## BROWNSWITCH ROAD

### SLIDELL, LOUISIANA

**RCL**  
CONSULTING, LLC

Engineering  
Architecture  
Engineering  
Construction  
Management

871 N. Country Blvd.  
Slidell, LA 70458  
Phone: 850-272-4444  
Fax: 850-272-4444  
www.rclconsulting.com

Project: Sheriff's Office Building, 1112 Brownsitch Road, Slidell, LA 70458  
Drawn By: BAF  
Checked By: VE  
Revisions:

RCLC  
Project Number: 0899  
Date Issued: 03/23/07  
Drawn By: BAF  
Checked By: VE

**CONSTRUCTION DOCUMENTS**

**SITE LAYOUT PLAN**

Sheet Number: **C1**