




F Series

Premier Low Profile Air Handlers

Electric or No Heat, with available 5-Speed High Efficiency ECM Motor

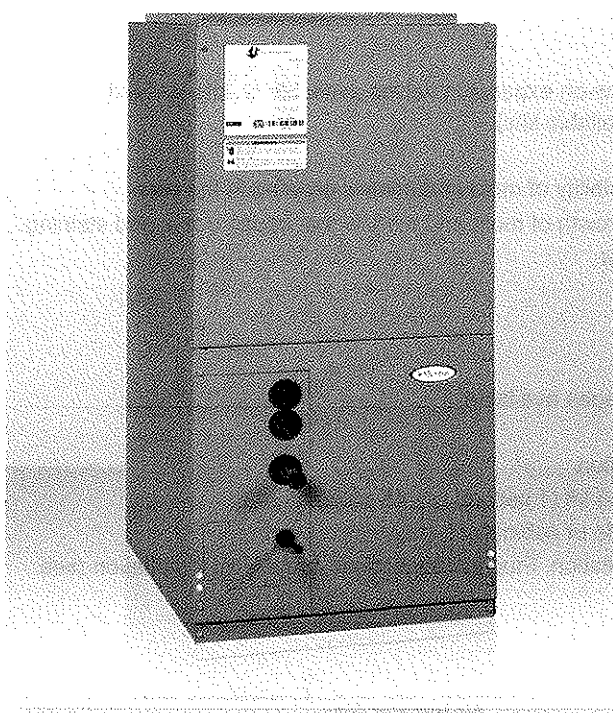

Contents	Page
Product Features	2
Physical Data	2
Nomenclature	3
Blower Performance	4
Electrical Data	6
Dimensions	8



Product improvement is a continuous process at Advanced Distributor Products. Therefore, product specifications are subject to change without notice and without obligation on our part. Please contact your ADP representative or distributor to verify details.
© by Advanced Distributor Products. All rights reserved.

Cabinet Features

- Two independent front access panels allow for easy access to clean the coil, even after installation.
- Only four (4) screws to remove blower panel for easier access.
- Slide-out blower and coil assemblies.
- Cabinet constructed of heavy gauge galvanized steel and lined with high quality 5/8" foil-faced insulation, with cabinet flanges & retaining rods for better attachment.
- Fully-painted cabinets available for additional corrosion resistance.
- Brackets hold coil assembly in place when installed in horizontal position.
- Available from factory as upflow or upflow/horizontal. Field installed horizontal drain pan kit also available.
- Filter rack built into every air handler (filter not included).
- ETL-certified cabinet with 2% or less air leakage and wrap-around flanges that increase stability in horizontal configurations.

Evaporator Coil Features

- Coils are air pressure tested at 500 PSI, pressure tested with Helium, charged with dry air and then sealed.
- Suitable for use with R-22 and R-410A.
- Lanced fin design.
- Rifled copper tubing.
- A/C or HP expansion valves available factory installed. Screw-on expansion valves available as kits for field installation (see Accessories & Replacement Parts list for available kits).
- TXV Bulbs come standard attached to header assembly.
- **HYDROTEC™** drain pans hold less water, which reduces the possibility of mold and mildew growing in the pan.
- All drain pans have Microban protection, which inhibits the growth of mold and mildew that cause odors and staining.
- Drain pans are molded of corrosion proof engineered polymer.
- Dual 3/4" FPT condensate drains on left and right sides.

Electrical Features

- 120 V 60 Hz, 208/240 V 60 Hz, and 220 V 50 Hz supply voltages available.
- 5-speed high efficiency ECM motor available.
- Dynamically balanced blowers for quiet, vibration-free operation.
- Fan time delay available factory installed or as a field installed kit (1 second on, 45 seconds off).
- Line voltage connections can be made on top, right or left side of cabinet.
- Electric heat available factory installed or as kit for field installation. Plug in connections simplify kit installation (see Accessories & Replacement Parts list for available kits).

Physical Data

		Air Handler Size									
		18	24	25	30	31	36	37	42	48	60
Available Voltage *		(120 V 60 Hz, 1 ph.), (208/240 V, 60 Hz, 1 ph.), (220 V, 50 Hz, 1 ph.)									
Maximum Elec. Heat Available (kW)		10	10	10	15	15	15	15	15	20	20
Transformer Size and Type		40 VA, Class 2									
Blower Data: 3-Speed Motor (120V)	Motor H. P.	1/4	1/4	1/4	1/3	1/3	1/3	-	1/2	3/4	3/4
	F. L. A. @ 120 V	2.0	3.7	4.2	4.2	5.6	5.6	-	5.6	8.5	9.0
	Wheel (dia x wid)	9x6	9x6	9x6	10x8	10x8	10x8	-	10x8	10x10	10x10
Blower Data: 3-Speed Motor (240V)	Motor H. P.	1/5	1/3	1/3	1/3	1/3	1/3	1/3	1/2	3/4	3/4
	F. L. A. @ 240 V	1.1	1.6	1.9	1.9	2.6	2.6	2.8	3.0	4.3	4.3
	Wheel (dia x wid)	9x6	9x6	10x8	10x8	10x8	10x8	10x8	10x8	10x10	10x10
Blower Data: 5-Speed High Eff. ECM Motor	Motor H. P.	1/3	1/3	1/2	1/2	1/2	1/2	1/2	1/2	3/4	1
	F. L. A. @ 240 V	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.2	4.6
	Wheel (dia x wid)	9x6	9x6	10x8	10x8	10x8	10x8	10x8	10x8	10x10	10x10
Nominal CFM		600	800	800	1000	1000	1200	1200	1400	1600	2000
Air Filter Size (in)		12x20	12x20	16x20	16x20	18x25	16x20	18x25	18x25	18x25	18x25
Refrigerant Conn. (IDS) Suction (in)		3/4	3/4	7/8	7/8	7/8	7/8	7/8	7/8	7/8	7/8
Refrigerant Conn. (IDS) Liquid (in)		3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8	3/8
R-22 Piston Size (in)		.053	.059	.059	.067	.067	.073	.073	.080	.084	.093
R-410A Piston Size (in)		.049	.053	.053	.059	.059	.067	.067	.073	.076	.093
Approx. Weight lbs (base unit w/o heat)		80	80	105	105	155	105	155	155	155	155

* 120 V, 60 Hz supply voltage cannot be used with electric heat, 5-Speed high efficiency ECM motor, and 37 MBTUH unit sizes.

220 V, 50 Hz supply voltage cannot be used with 5-speed high efficiency ECM motor.

Product Nomenclature

F C M E31 2 24 S 05 2

Cabinet Color

- F** = Front panel only
- P** = Entire unit painted

Front Panel Color (F Models Only)

- blank** = Taupe
- R** = Green

Blower Motor Type

- C** = 3-speed motor
- E** = *5-speed high efficiency ECM motor

Voltage

- 1** = 208/240 V, 60 Hz, 1 ph.
- 2** = 208/240 V, 60 Hz, 1 ph. w/time delay
- 3** = *120 V, 60 Hz, 1 ph.
- 4** = *120 V, 60 Hz, 1 ph.w/time delay
- 5** = *220 V, 50 Hz, 1 ph.
- 6** = *220 V, 50 Hz, 1 ph. w/time delay

Airflow Configuration

- V** = Vertical only
- M** = Multi-position (upflow, left or right horiz.)

Slab Number

Metering Device

- 0** = No cooling coil
- 1** = Piston (R-410A)
- 2** = Piston (R-22)
- 3** = Bleed TXV (R-22)
- 4** = Non-bleed A/C TXV (R-22)
- 5** = Non-bleed HP-A/C TXV (R-22)
- 6** = Non-bleed A/C TXV (R-410A)
- 9** = Non-bleed HP-A/C TXV (R-410A)

Electric Heat

- | | |
|--------------------|----------------------|
| 00 = none | Available In: |
| 05 = 5 kW | sizes 18 - 60 |
| 07 = 7.5 kW | sizes 18 - 60 |
| 10 = 10 kW | sizes 18 - 60 |
| 15 = 15 kW | sizes 30 - 60 |
| 20 = 20 kW | sizes 48 - 60 |

Note: Maximum 10 kW per electrical supply circuit.

Unit Size (Nominal MBTUH)

18, 24, 25, 30, 31, 36, 37*, 42, 48, 60

Line Voltage Connection

	Amount of Heat (kW)					
	0	5	7.5	10	15	20
S = Stripped wire	#	#				
T = Terminal block		O	#	#		
B = Circuit breaker		O	O	O	#	#

= Standard O = Optional

* 120 V, 60 Hz supply voltage cannot be used with electric heat, 5-speed high efficiency ECM motor, and 37 MBTUH unit size.
 220 V, 50 Hz supply voltage cannot be used with 5-speed high efficiency ECM motor.

Blower Performance: 3-Speed Motor (CFM vs. ESP inches H2O)

- All data is given while air handler is operating with a dry DX coil and air filter installed.
- Speeds marked ***bold with asterisk** are the factory speed settings for both heating and cooling.
- Heating speeds should not be reduced below factory setting.
- Different speeds can be set for cooling mode; see installation instructions for changing cooling speeds.

208/240 Volt 3-Speed Motor

Size	Speed	0.10	0.20	0.30	0.40	0.50
18	Low	471	444	417	408	398
	*Med	727	686	643	629	614
	High	770	759	749	725	700
24	Low	664	641	623	605	574
	*Med	906	855	802	783	764
	High	940	927	914	884	854
25	*Low	944	890	836	817	798
	Med	1207	1139	1068	1044	1020
	High	1224	1208	1191	1152	1113
30	Low	944	890	836	817	798
	*Med	1207	1139	1068	1044	1020
	High	1224	1208	1191	1152	1113
31	*Low	1226	1156	1086	1061	1036
	Med	1465	1382	1245	1217	1188
	High	1467	1447	1427	1381	1334
36	Low	1226	1156	1086	1061	1036
	*Med	1465	1382	1245	1217	1188
	High	1467	1447	1427	1381	1334
37	Low	1190	1122	1052	1028	1003
	*Med	1437	1355	1270	1241	1212
	High	1449	1429	1389	1344	1298
42	Low	1410	1329	1248	1219	1189
	*Med	1726	1628	1526	1491	1456
	High	1733	1709	1685	1630	1574
48	*Low	1728	1677	1629	1582	1535
	Med	1821	1796	1772	1714	1656
	High	1870	1844	1819	1760	1700
60	Low	1745	1645	1545	1509	1473
	*Med	2107	2078	2048	1981	1913
	High	2163	2133	2103	2034	1964

120 Volt 3-Speed Motor

Size	Speed	0.10	0.20	0.30	0.40	0.50
18	Low	431	424	425	403	385
	*Med	645	645	645	641	597
	High	804	804	804	793	765
24	Low	530	525	519	507	483
	*Med	925	915	875	823	736
	High	1189	1110	1016	917	826
25	*Low	998	956	905	844	770
	Med	1045	1004	962	871	785
	High	1089	1036	980	905	826
30	Low	998	956	905	844	770
	*Med	1045	1004	962	871	785
	High	1089	1036	980	905	826
31	*Low	945	930	912	869	793
	Med	1150	1145	1123	1166	1004
	High	1291	1291	1285	1277	1200
36	Low	945	930	912	869	793
	*Med	1150	1145	1123	1166	1004
	High	1291	1291	1285	1277	1200
42	*Low	1393	1378	1366	1246	1167
	Med	1603	1592	1575	1540	1443
	High	1811	1811	1805	1744	1674
48	Low	1393	1378	1366	1246	1167
	*Med	1603	1592	1575	1540	1443
	High	1811	1811	1805	1744	1674
60	Low	1583	1583	1583	1567	1551
	*Med	1972	1972	1968	1882	1819
	High	2169	2146	2096	2004	1908

Blower Performance: 5-Speed High Efficiency ECM Motor (CFM vs. ESP inches H2O)

- All data is given while air handler is operating with a dry DX coil and air filter installed.
- Taps marked ***bold with asterisk** are the factory speed settings for both heating and cooling.
- Heating speeds should not be reduced below factory setting.
- Different speeds can be set for cooling mode; see installation instructions for changing cooling speeds.

Size	Tap	0.10	0.20	0.30	0.35	0.40	0.45	0.50	0.60
18	1	492	448	393	361	361	333	307	273
	2	513	471	420	414	384	357	325	318
	*3	667	641	615	605	596	577	567	560
	4	705	673	665	648	630	621	603	590
	5	721	689	673	656	639	629	612	590
24, 25	1	732	627	590	581	571	545	536	525
	2	671	634	594	578	573	546	493	480
	*3	892	859	832	828	818	797	790	775
	4	911	866	839	832	825	818	804	760
	5	924	886	846	832	825	818	797	780
30, 31	1	871	830	778	722	671	635	625	586
	2	906	859	809	779	715	689	654	635
	*3	1085	1070	1048	1036	1024	1001	989	975
	4	1125	1103	1087	1059	1047	1024	1012	983
	5	1176	1146	1114	1098	1081	1059	1047	1029
36, 37	1	882	887	826	804	766	760	755	695
	2	1082	1037	1025	1002	990	959	921	881
	*3	1270	1250	1238	1228	1214	1189	1179	1162
	4	1290	1275	1265	1246	1236	1227	1212	1172
	5	1335	1315	1301	1287	1278	1259	1240	1225
42	1	1008	907	861	832	803	772	717	671
	2	1292	1243	1202	1192	1171	1149	1127	1070
	*3	1447	1430	1404	1377	1359	1340	1322	1283
	4	1534	1502	1476	1459	1433	1416	1398	1362
	5	1559	1519	1502	1477	1460	1434	1417	1381
48	1	1585	1494	1320	1252	1210	1151	1120	1088
	2	1510	1463	1414	1389	1363	1324	1256	1228
	*3	1675	1633	1579	1556	1545	1510	1487	1451
	4	1737	1697	1655	1633	1612	1590	1568	1545
	5	1781	1731	1679	1658	1637	1615	1593	1571
60	1	1394	1342	1288	1251	1172	1109	1077	1025
	2	1722	1666	1623	1594	1564	1534	1518	1471
	*3	2083	2048	2013	1990	1972	1947	1929	1885
	4	2179	2135	2101	2079	2056	2039	2021	1937
	5	2209	2166	2122	2101	2057	2058	2047	1956

Electrical Data: 3 Speed Motor

208/240 V, 60 Hz, 1 phase

No Electric Heat

Air Handler Size	Electric Heating Capacity		Blower Amps		Minimum Circuit Ampacity		Circuit Breaker Amps per Stage	
	kW	BTUH	208 V	240 V	208 V	240 V	1	2
	(1) 240 V	(1) 240 V						
18	0	0	1.2	1.1	1.5	1.4	15	-
24	0	0	1.7	1.6	2.1	2.0	15	-
25, 30	0	0	2.0	1.9	2.5	2.4	15	-
31, 36	0	0	2.7	2.6	3.4	3.3	15	-
37, 42	0	0	3.2	3.0	4.0	3.8	15	-
48, 60	0	0	4.5	4.3	5.7	5.4	15	-

With Electric Heat

Air Handler Size	Electric Heating Capacity		Blower Amps		Minimum Circuit Ampacity		Circuit Breaker Amps per Stage	
	kW	BTUH	208 V	240 V	208 V	240 V	1	2
	(1) 240 V	(1) 240 V						
18	5	17,065	1.2	1.1	24.0	27.4	30	-
	7.5	25,598	1.2	1.1	35.3	40.4	45	-
	10	34,130	1.2	1.1	46.6	53.5	60	-
24	5	17,065	1.7	1.6	24.7	28.0	30	-
	7.5	25,598	1.7	1.6	36.0	41.1	45	-
	10	34,130	1.7	1.6	47.2	54.1	60	-
25	5	17,065	2.0	1.9	25.1	28.4	30	-
	7.5	25,598	2.0	1.9	36.4	41.4	45	-
	10	34,130	2.0	1.9	47.6	54.5	60	-
30	5	17,065	2.0	1.9	25.1	28.4	30	-
	7.5	25,598	2.0	1.9	36.4	41.4	45	-
	10	34,130	2.0	1.9	47.6	54.5	60	-
	*15	51,195	2.0	1.9	70.2	80.5	60	30
31, 36	5	17,065	2.7	2.6	26.0	29.3	30	-
	7.5	25,598	2.7	2.6	37.3	42.3	45	-
	10	34,130	2.7	2.6	48.6	55.3	60	-
	*15	51,195	2.7	2.6	71.1	81.4	60	30
37, 42	5	17,065	3.2	3.0	26.5	29.8	30	-
	7.5	25,598	3.2	3.0	37.8	42.8	45	-
	10	34,130	3.2	3.0	49.1	55.8	60	-
	*15	51,195	3.2	3.0	71.7	81.9	60	30
48, 60	7.5	25,598	4.5	4.3	39.5	44.4	45	-
	10	34,130	4.5	4.3	50.8	57.5	60	-
	*15	51,195	4.5	4.3	73.4	83.5	60	30
	*20	68,260	4.5	4.3	95.9	109.5	60	60

(1) For 208 volt use 0.751 correction factor for kW & BTUH.

* kW packages ***bold with asterisk** require and include circuit breakers; circuit breakers are optional for others.

Electrical Data: 5-Speed High Efficiency ECM Motor

240 V, 60 Hz, 1 phase

No Electric Heat

Air Handler Size	Elec. Heating Cap.		Blower Amps	Minimum Circuit Ampacity	Circuit Breaker Amps per Stage	
	kW	BTUH			1	2
	(1) 240 V	(1) 240 V	240 V	240 V		
18, 24, 25	0	0	3.0	3.8	15	-
30, 31, 36, 37, 42	0	0	3.0	3.8	15	-
48	0	0	3.2	4.0	15	-
60	0	0	4.6	5.8	15	-

With Electric Heat

Air Handler Size	Elec. Heating Cap.		Blower Amps	Minimum Circuit Ampacity	Circuit Breaker Amps per Stage	
	kW	BTUH			1	2
	(1) 240 V	(1) 240 V	240 V	240 V		
18, 24, 25	5	17,065	3.0	29.8	30	-
	7.5	25,598	3.0	42.8	45	-
	10	34,130	3.0	55.8	60	-
30, 31, 36, 37, 42	5	17,065	3.0	29.8	30	-
	7.5	25,598	3.0	42.8	45	-
	10	34,130	3.0	55.8	60	-
	*15	51,195	3.0	81.9	60	30
48	5	17,065	3.2	30.0	30	-
	7.5	25,598	3.2	43.1	45	-
	10	34,130	3.2	56.1	60	-
	*15	51,195	3.2	82.1	60	30
	*20	68,260	3.2	108.2	60	60
60	7.5	25,598	4.6	44.8	45	-
	10	34,130	4.6	57.8	60	-
	*15	51,195	4.6	83.9	60	30
	*20	68,260	4.6	109.9	60	60

(1) For 208 volt use 0.751 correction factor for kW & BTUH.

* kW packages ***bold with asterisk** require and include circuit breakers; circuit breakers are optional for others.

Dimensions

Air Handler Size	A (in)	B (in)	C (in)	Supply Duct Opening		Return Duct Opening	
				Depth (in)	Width (in)	Depth (in)	Width (in)
18, 24	36	22	15	17	13	20.35	12.20
25, 30, 36	41	22	18 1/2	17	16.5	20.35	16.20
31, 37, 42, 48, 60	48	26	21 7/8	21	20	24.60	20.08

