



Manufactured by In-O-Vate Technologies
 810 Saturn Street, #21, Jupiter, FL 33477
 Phone: 888-443-7937, Fax: 800-308-9345

Model Specifications - All Dryerboxes

Complete model dimensions, pictures and illustrations



Technical Specifications

Model Number	Wall Size	Exhaust Direction
480	2x6	Up and Down NEW
425	2x6	Upward*
350	2x4	Upward
4D	2x6	Downward
3D	2x4	Downward

* For stackable or pedestal dryers with downward exhaust direction install this model upside-down

Common Features / Specifications

- Models 425, 4D, 350 and 3D are **UL Classified**
- Deep drawn manufacturing process made in the USA
- Extension rim protrudes from nailing flange 7/8"
- Total of eight 1/4" mounting holes (4 on each side)
- Sides are tapered to allow for nesting of multiple boxes
- Surface is clean of oil residue and easy to paint
- Instruction sheet attached to rear panel
- All models incorporate a **Gas Port knock-out**

Quick Product Selector



Which Dryerbox is Right for My Application



Quick Flex Hose Tips


>> Additional Installation Resources and Tips <<

The Dryerbox Models

Model 480

Sku DB-480 (Upward & Downward | Pedestal or Floor)

- + 22 gauge aluminized steel weighing 6 pounds each
- + Top port measures 4 1/8" with very slight oval shape
- + Distance from nailing flange to rear of box is 4 1/4"
- + Overall measurements: 23 1/2" h x 17 3/8" w x 5 1/8" deep
- + Inside measures 14" wide x 20 1/2" tall
- + Five units per carton, 32 cartons per pallet, ships as a class 70





Model 425



Sku DB-425 (For Upward Exhaust Direction)



- + 22 gauge aluminized steel weighing 4.14 pounds each
- + Top port measures 4 1/8" with very slight oval shape
- + Distance from nailing flange to rear of box is 4 1/4"
- + Overall measurements: 21" h x 12 1/2" w x 5 1/8" deep
- + Inside measures 9 1/2" wide x 18 1/4" tall
- + Five units per carton, 36 cartons per pallet, ships as a class 70

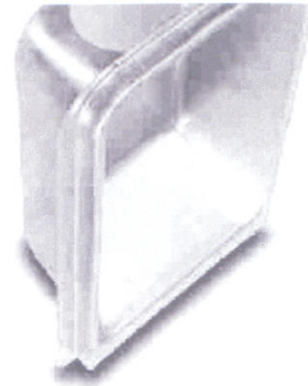

Model 350

Sku DB-350 (For Upward Exhaust Direction)



- + 22 gauge aluminized steel weighing 4.03 pounds each
- + Top port measures 4 7/8" x 3 1/8" oval shape
- + Distance from nailing flange to rear of box is 3 1/2"
- + Overall measurements: 21" h x 12 1/2" w x 4 3/8" deep
- + Inside measures 9 1/2" wide x 18 1/4" tall
- + Six units per carton, 36 cartons per pallet, ships as a class 70

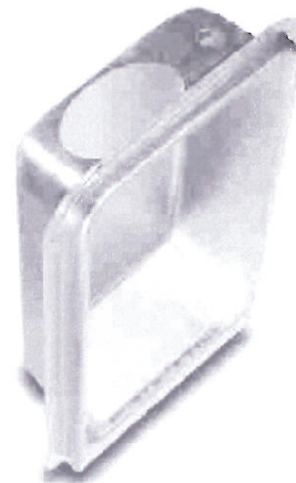

Model 4D

Sku DB-4D (For Downward Exhaust Direction)

- + 22 gauge aluminized steel weighing 4.31 pounds each
- + Lower port measures 4 1/8" with very slight oval shape
- + Distance from nailing flange to rear of box is 4 1/4"
- + Overall measurements: 19" h x 16 3/4" w x 5 1/8" deep
- + Inside measures 14" wide x 16" tall
- + Five units per carton, 36 cartons per pallet, ships as a class 70

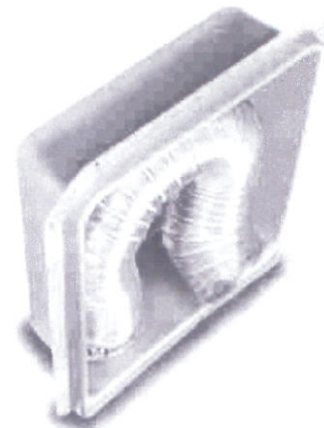

NOTE: [CLICK HERE](#) (PDF), for Model 4D when used with the Long Tum Dryer-EII.

Not for use with pedestal or stackable dryers. **Use a 425 instead.**

Model 3D

Sku DB-3D (For Downward Exhaust Direction)



- 22 gauge aluminized steel weighing 4.12 pounds each
- Lower port measures 4 1/8" with very slight oval shape
- Distance from nailing flange to rear of box is 3 1/2"
- Overall measurements: 19" h x 16 3/4" w x 4 3/8" deep
- Inside measures 14" wide x 16" tall
- Six units per carton, 36 cartons per pallet, ships as a class 70



NOTE: Not for use with pedestal or stackable dryers. [Use a 350 or 425 instead.](#)

Retro-Fit Model 400

Shallower for 2 X 4 Walls

- 22 gauge aluminized steel, [click here](#) for enlarged image
- Powder coated (similar to finish on dryer appliance)
- Top port measures 4 7/8" x 3 1/8" oval shape
- Distance from mounting flange to rear of box is 4"
- Overall measurements: 21" h x 11 1/2" w x 4" deep
- Inside measures 9 1/2" wide x 18 1/4" tall
- Two mounting 3/16" holes on bottom flange
 - [Model 400 Spec Sheet](#)
 - Read "[Instruction Sheet](#)" prior to ordering or [click here](#)
 - [Alternate method to using the Retro-Fit Box](#)
 - [Installation and Retro's stories by others](#)



Select Lowe's locations carry a paintable version of the Retro-Dryerbox 400 (non-powder coated). Ask for Lowe's Item Number 319847. Click [here](#) to see if your local store has it.

Retro-Fit Model 500

Deeper for 2 X 6 Walls

- 22 gauge aluminized steel, [click here](#) for enlarged image
- Powder coated (similar to finish on dryer appliance)
- Top port measures 4 1/8" with very slight oval shape
- Distance from mounting flange to rear of box is 5 1/8"
- Overall measurements: 21" h x 11 1/2" w x 5 1/8" deep
- Inside measures 9 1/2" wide x 18 1/4" tall
- Two mounting 3/16" holes on bottom flange
 - [Model 500 Spec Sheet](#)
 - Read "[Instruction Sheet](#)" prior to ordering or [click here](#)
 - [Alternate method to using the Retro-Fit Box](#)
 - [Installation and Retro's stories by others](#)

