



TABLEAU™
 LINEAR ADJUSTABLE
 FLUORESCENT
 TAB SERIES

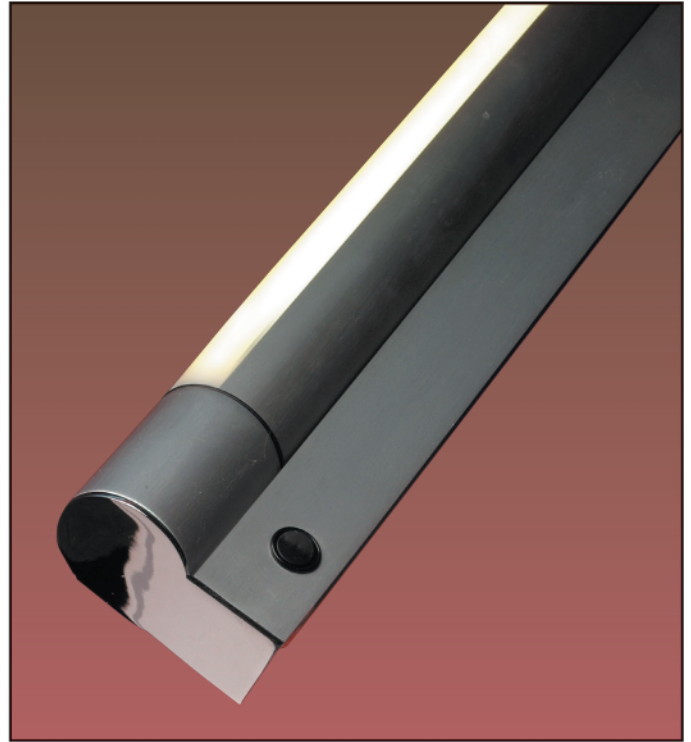


Brushed Aluminum


- Elegant styling, energy efficient lamping and durable construction make Tableau ideal for bathroom and task light applications in hotels, dormitories, offices and hospitals.
- Tableau can also be mounted on ceilings to provide vertical illumination on walls, art or message boards.
- Smooth, low glare opal diffuser or clear linear prism lens rotates to direct light as needed.
- Tri-phosphor T8, T5 or High Output T5 lamps included.
- Premium electronic ballast with soft-start circuit maximizes lamp life and provides flicker-free performance.




Painted White

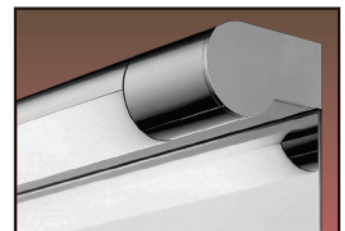


Top right of tableau



Polished Chrome




Painted matte aluminum

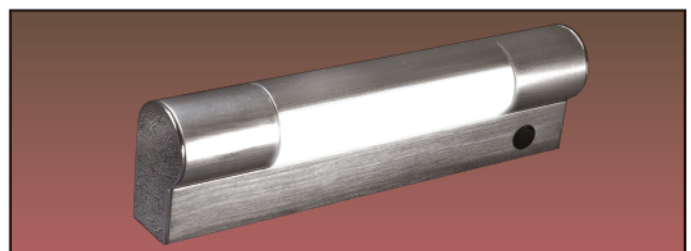

TAB 126 in Brushed Aluminum

TABLEAU™
 LINEAR ADJUSTABLE
 FLUORESCENT
 TAB SERIES

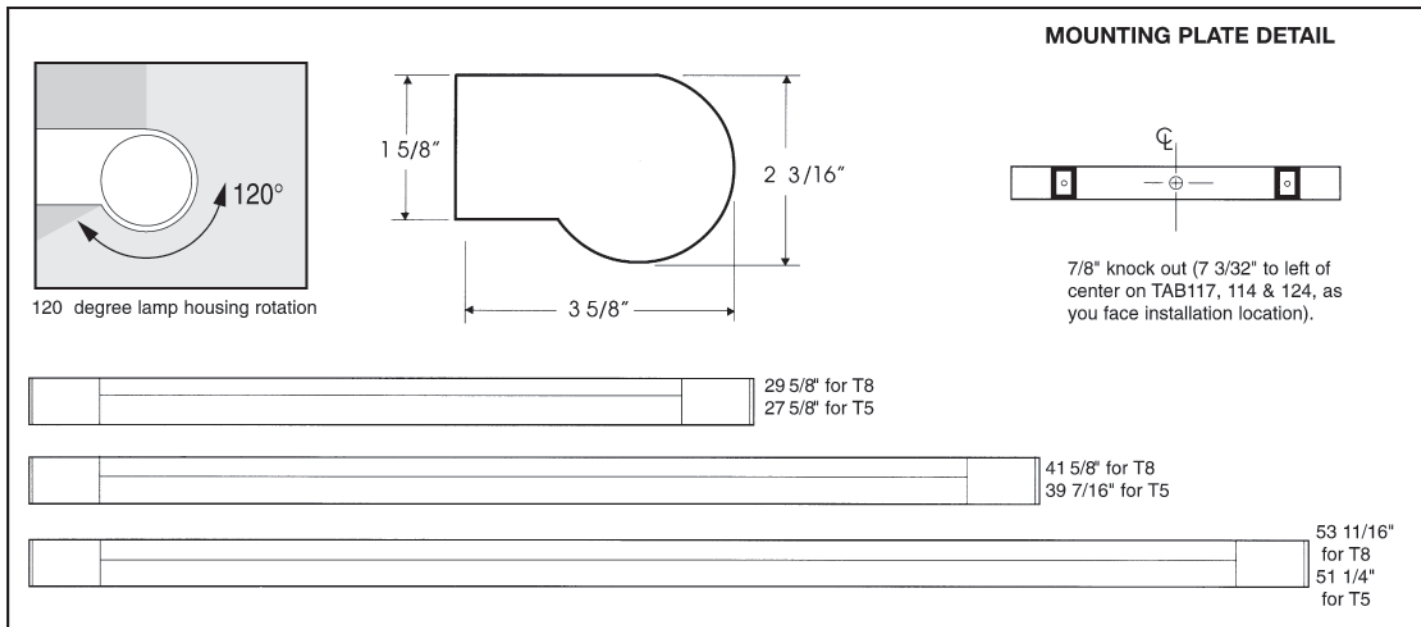

SPECIFICATIONS

CONSTRUCTION

.090 extruded aluminum housing with die-cast metal ends.

DIFFUSER

Snap-in translucent opal acrylic diffuser standard, with clear linear prism acrylic diffuser optional.

FINISHES

Fixtures may be specified with a variety of painted, anodized or plated finishes.

ELECTRICAL

Premium grade high frequency electronic ballast with pre-heat start circuit to facilitate long lamp life with frequent on-off operation. Lamps start in less than 1 second without flicker. Rocker switch is supplied as standard equipment (no switch supplied with 277 volt option).

LAMPS

One CFQ (26 watt, supplied by others), T8 (17, 25, or 32 watt), T5 (14, 21 or 28 watt) or High Output T5 (24, 39 or 54 watt) 3000K tri-phosphor fluorescent lamp included (CFQ lamp must be supplied by others). 3500K and 4100K tri-phosphor lamps available in place of standard 3000K.

INSTALLATION FEATURES

Rear mounting plate secures to wall. Fixture snaps onto mounting plate and locks into position with 2 screws. 7/8" knockout in mounting plate, per diagram above, for attaching trade-size electrical fitting.

LABELS

U.L. CUL Damp

ORDERING INFORMATION

CATALOG #	LAMPS	L	W	D
CFQ				
TAB126-RSW	1/F26CFQ	13 1/4"	3 3/8"	3 3/8"
T8				
TAB117-RSW	1/F17T8	29 5/8"	2 3/16"	3 5/8"
TAB125-RSW	1/F25T8	41 5/8"	2 3/16"	3 5/8"
TAB132-RSW	1/F32T8	53 11/16"	2 3/16"	3 5/8"
T5				
TAB114-RSW	1/F14T5	27 5/8"	2 3/16"	3 5/8"
TAB121-RSW	1/F21T5	39 7/16"	2 3/16"	3 5/8"
TAB128-RSW	1/F28T5	51 1/64"	2 3/16"	3 5/8"
High Output T5				
TAB124-RSW	1/F24T5/HO	27 5/8"	2 3/16"	3 5/8"
TAB139-RSW	1/F39T5/HO	39 7/16"	2 3/16"	3 5/8"
TAB154-RSW	1/F54T5/HO	51 1/64"	2 3/16"	3 5/8"

Note: Specify lamp if other than standard 3000K (CFQ lamp supplied by others)

FINISHES (must add as suffix)

/BA	Brushed Anodized Aluminum
/MA	Painted Matte Aluminum
/PC	Plated Polished Chrome
/PS	Anodized Polished Silver
/WH	Painted White

OPTIONS (must add as suffix)

/CL	Clear Lens
/CO-W	Convenience Outlet (for 120 volt only)
/LESS SWITCH	Shipped less switch

Note: Consult factory for 277 volt availability (not available with RSW)

ELECTRICAL DATA

	17W T8	25W T8	32W T8	14W T5	21W T5	28W T5	24W T5/HO	39W T5/HO	54W T5/HO
Input Watts	24	31	35	18	25	33	28	41	64
Max. Amps	.21	.28	.32	.15	.21	.28	.23	.34	.54
Power Factor	.95	.92	.91	.98	.98	.98	.98	.98	.98
THD	.20%	.25%	.15%	.10%	.10%	.10%	.10%	.10%	.10%