LACOMBE LAND L.L.C.

THE NORTH INSTITUTE–MEDICAL OFFICE

29301 DIXIE RANCH ROAD, LACOMBE, LA 70445

ARCHITECT'S PROJECT # 9–03

FOURNET & FOURNET A.I.A.
503 CARDINAL DRIVE
P.O. BOX 1256
THIBODAUX, LA 70302

4/04

SHEET
A3.2

SPECIFIC NOTES–A3.2

1–3.2 – 2 PLY 5/8" PLYWOOD DECK. SECURE WITH CONSTRUCTION ADHESIVE AND 1 5/8" AND 2 1/4" SCREWS. STAGGER PLY END JOINTS 32". STAGGER PLY SIDE JOINTS 24". EXTEND DECK INTO SOFFIT TO FACILITATE CLOSURE AT DRAFT STOP WALLS AND RATED PARTITIONS. INSTALL FIRE BLOCKING BETWEEN JOIST AS REQUIRED TO SEGREGATE RATED ASSEMBLY AND DRAFT STOP AREAS PRIOR TO DECK PLACEMENT.

2–3.2 – ONE HOUR FIRE RATED PARTITION. EXTEND WALL TO UNDERSIDE OF ROOF DECK. FIRE CAULK WALL/FLOOR/ROOF/CEILING TRANSITIONS.

3–3.2 – DRAFT STOP PARTITION. EXTEND WALL TO UNDERSIDE OF ROOF DECK AND INTO SOFFIT. TAPE AND FLOAT 5/8" GYPSUM BOARD ONE SIDE. OPEN STUDS TO UNOCCUPIED ATTIC.

4–3.2 – OPEN STUD/JACK STUD WALLS. FRAME PLUMB AND TRUE WITH 2X4 STUDS AT 16" AS SHOWN FOR FUTURE FINISH.

5–3.2 – JACK STUD WALL. 2X4 STUDS @ 16" FOR ROOF SUPPORT.

ATTIC PLAN – BASE BID

3/16" = 1'–0"

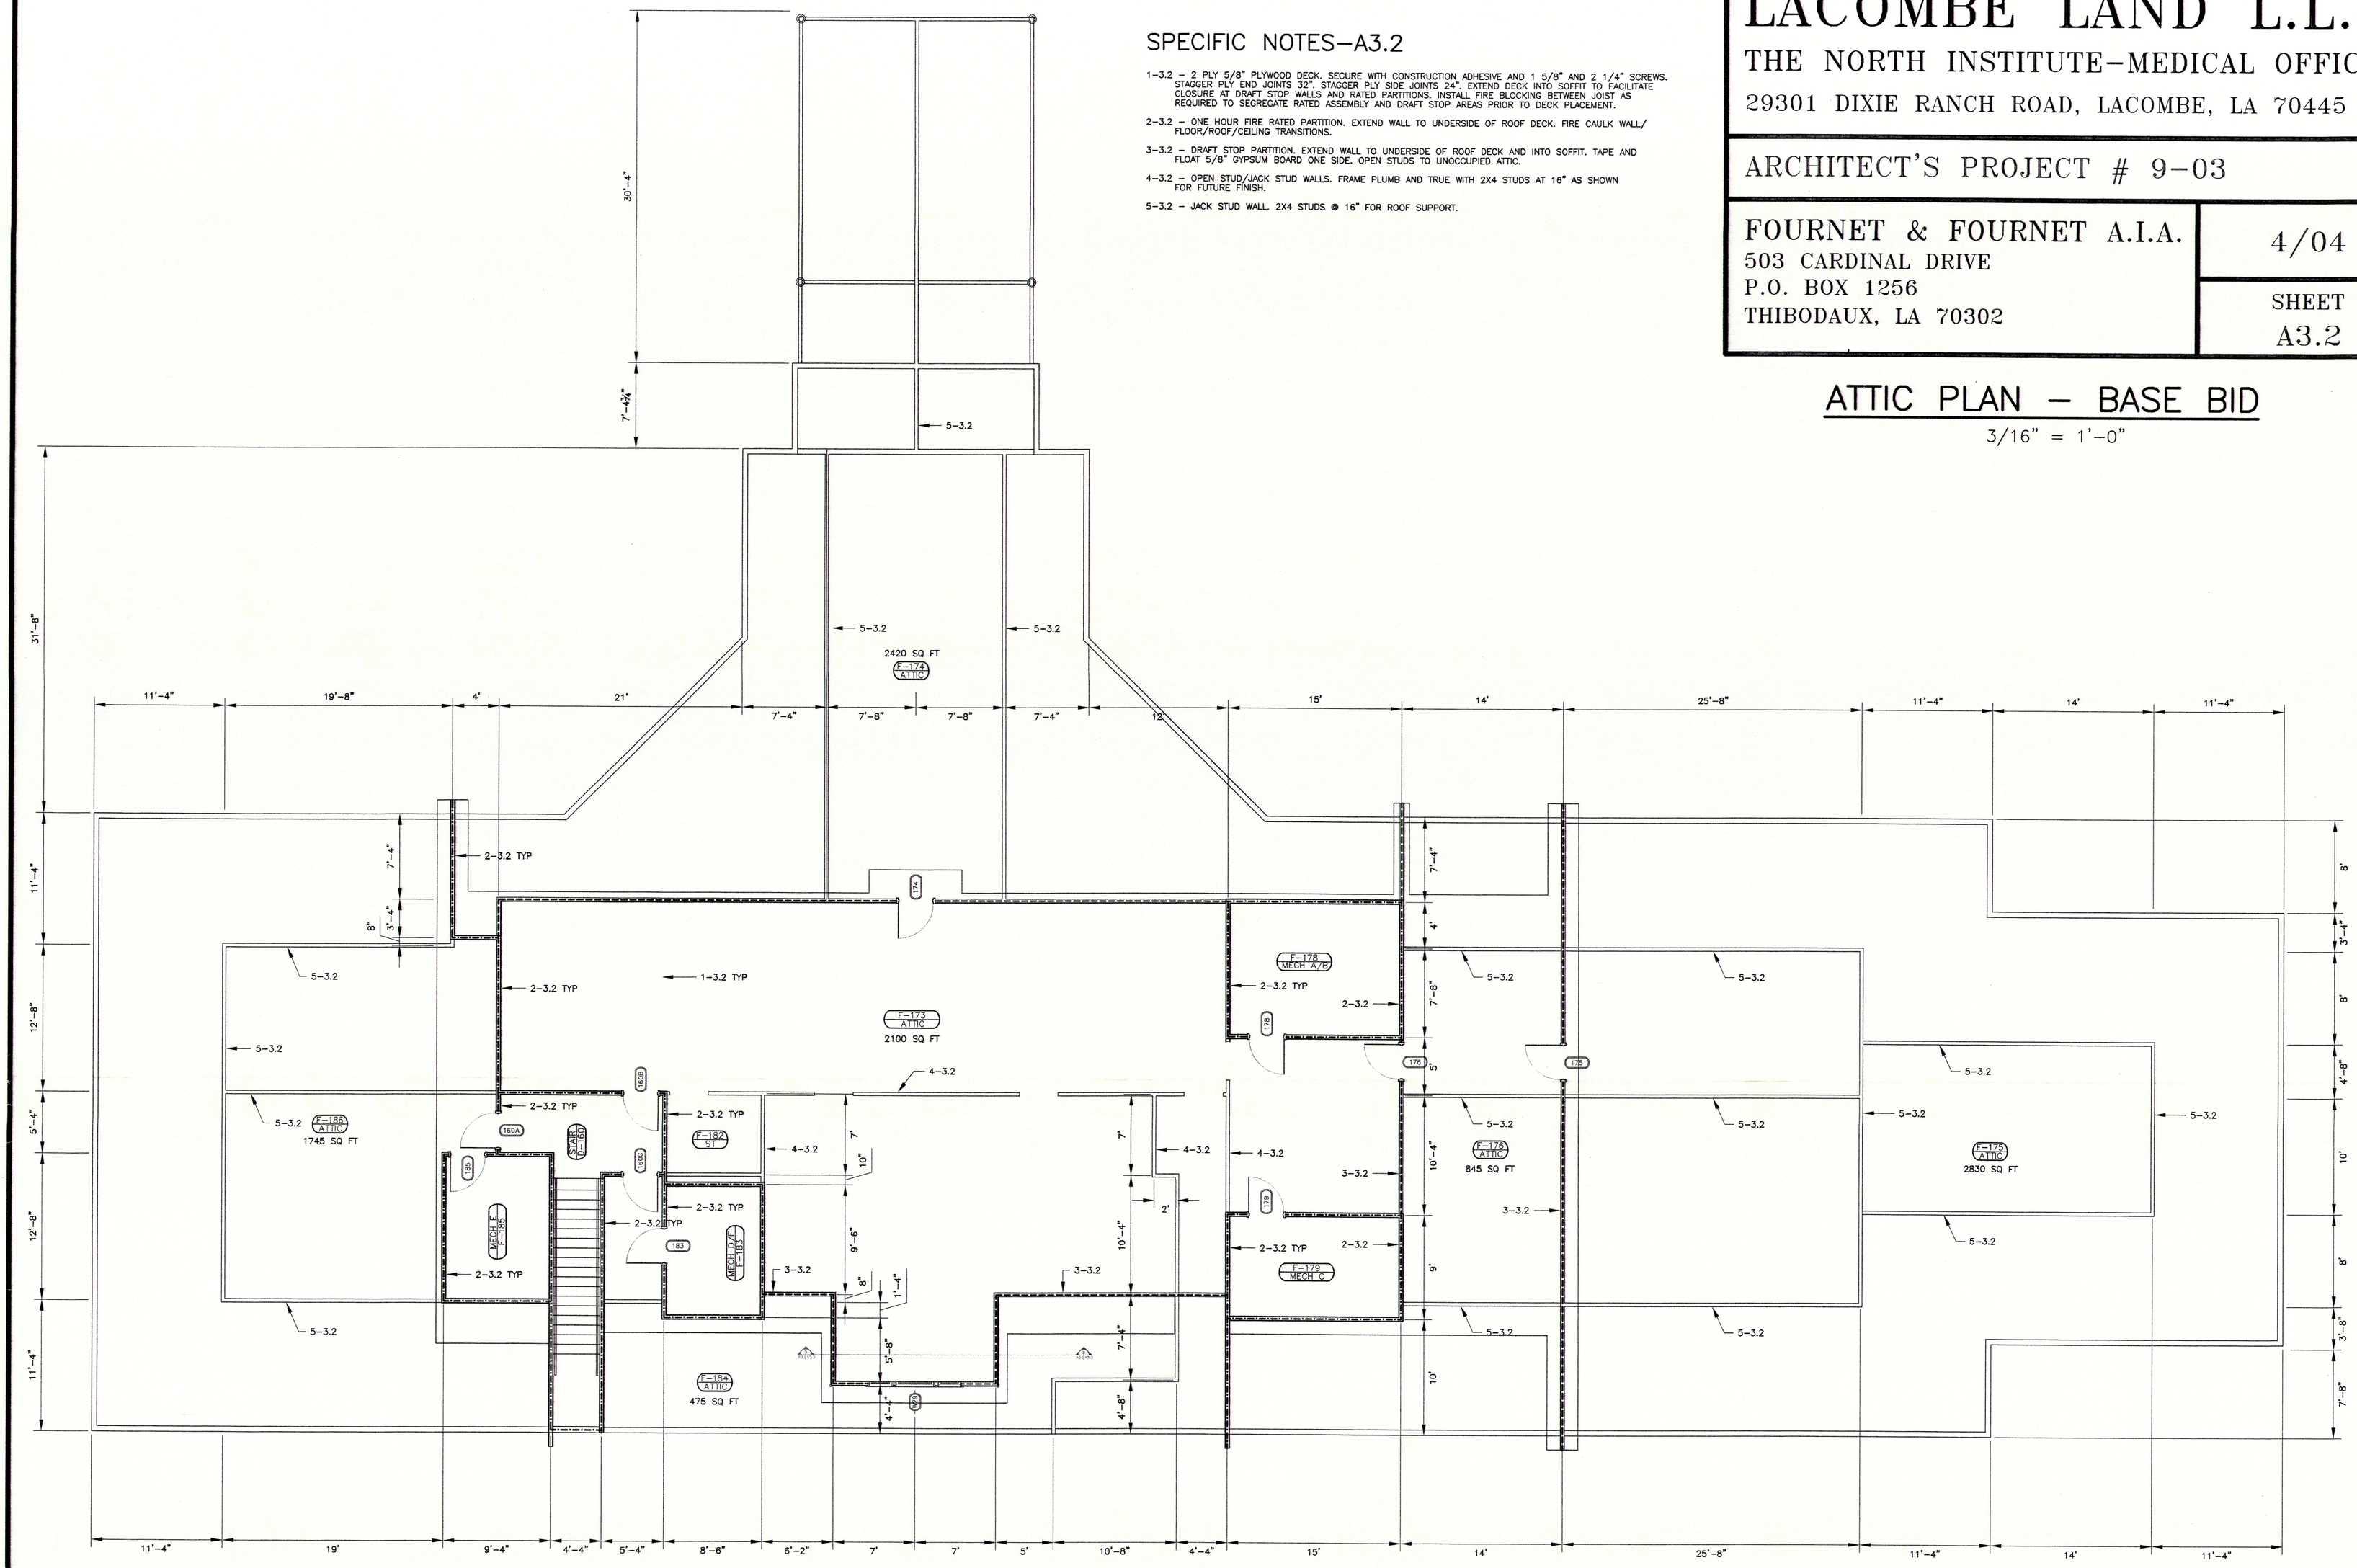

4/22/04