



Designation: E 569 – 9702

An American National Standard

Standard Practice for Acoustic Emission Monitoring of Structures During Controlled Stimulation¹

This standard is issued under the fixed designation E 569; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This practice provides guidelines for acoustic emission (AE) examination or monitoring of structures, such as pressure vessels, piping systems, or other structures that can be stressed by mechanical or thermal means.

1.2 The basic functions of an AE monitoring system are to detect, locate, and classify emission sources. Other methods of nondestructive testing (NDT) may be used to further evaluate the significance of acoustic emission sources.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 *ASTM Standards:*

¹ This practice is under the jurisdiction of ASTM Committee E-7 E07 on Nondestructive Testing and is the direct responsibility of Subcommittee E07.04 on Acoustic Emission.

Current edition approved May 10, 1997; 2002. Published February 1998; August 2002. Originally published as E 569 – 76. Last previous edition E 569 – 8597.

~~E 650 Guide 543 Practice for Mounting Piezoelectric Acoustic Emission Sensors Agencies Performing Nondestructive Testing~~²

~~E 650 Guide for Mounting Piezoelectric Acoustic Emission Sensors~~²

~~E 750 Practice for Characterizing Acoustic Emission Instrumentation~~²

E 1316 Terminology for Nondestructive Examinations²

2.2 *Other Documents:*

SNT-TC-1A Recommended Practice for Nondestructive Testing Personnel Qualification and Certification³

ANSI/ASNT CP-189 Standard for Qualification and Certification of Nondestructive Testing Personnel³

² *Annual Book of ASTM Standards*, Vol 03.03.

³ Available from American Society for Nondestructive Testing, 1711 Arlingate Plaza, PO Box 28518, Columbus, Ohio 43228-0518.

~~ML-STD-410~~ ~~Nondestructive Testing Personnel Qualification and Certification~~⁴

3. Terminology

3.1 *Definitions*—Definitions of terms relating to acoustic emission may be found in Section B of Terminology E 1316.

3.2 *Definitions of Terms Specific to this Standard:*

3.2.1 *AE activity*—the presence of acoustic emission during ~~a test~~ an examination.

3.2.2 *active source*—one which exhibits increasing cumulative AE activity with increasing or constant stimulus.

3.2.3 *critically active source*—one which exhibits an increasing rate of change of cumulative AE activity with increasing or constant stimulus.

3.2.4 *AE source intensity*—average energy, counts or amplitude per hit.

3.2.5 *intense source*—one in which the AE source intensity of an active source consistently exceeds, by a specified amount, the average AE source intensity of active sources.

3.2.6 *critically intense source*—one in which the AE source intensity consistently increases with increasing stimulus or with time under constant stimulus.

4. Summary of Practice

4.1 Acoustic emission examination of a structure usually requires application of a mechanical or thermal stimulus. Such stimulation produces changes in the stresses in the structure. During stimulation of a structure, AE from discontinuities (such as cracks and inclusions) and from other areas of stress concentration, or from other acoustic sources (such as leaks, loose parts, and structural motion) can be detected by an instrumentation system, using sensors which, when stimulated by stress waves, generate electrical signals.

4.2 In addition to immediate evaluation of the emissions detected during the application of the stimulus, a permanent record of the number and location of emitting sources and the relative amount of AE detected from each source provides a basis for comparison with sources detected during the ~~test~~ examination and during subsequent stimulation.

5. Order Information

5.1 If AE monitoring in accordance with this practice is performed as a service, the following items are subject to agreement between the purchaser and supplier:

5.1.1 *Examination Area*—Many applications will require an arrangement of sensors such that all areas of the structure are monitored. In other applications, only a portion of the structure may require monitoring.

5.1.2 Previous maximum vessel stresses or loads; vessel relaxation period, if any; the planned stimulation schedule, stimulation parameters, and AE monitoring period(s) (see 10.1).

5.1.3 The person(s) responsible for resuming the ~~test~~ examination if unexpected or unusual AE activity response patterns are detected.

5.1.4 The date and location of the intended examination and the expected ambient conditions.

5.1.5 The criteria to be used for interpreting, classifying, and evaluating AE indications and response patterns, if different from that described in this practice.

5.1.6 Disposition of records or other ~~test~~ examination data and contents of the ~~test~~ examination report.

5.1.7 Survey of the structure for extraneous background noise that could preclude an effective testing examination.

6. Basis of Application

6.1 *Personnel Qualification*—~~Nondestructive testing (NDT)~~

6.1.1 If specified in the contractual agreement, personnel performing examinations to this standard shall be qualified in accordance with a nationally recognized NDT personnel qualification practice or standard such as ANSI/ASNT-CP-189, SNT-TC-1A, ~~ML-STD-410~~, ~~NAS-410~~ or a similar document and certified by the employer or certifying agency, as applicable. The practice or standard used and its applicable revision shall be ~~specified~~ identified in the contractual agreement between the using parties.

6.2 *Qualification of Nondestructive Testing Agencies*—

6.2.1 If specified in the contractual agreement, NDT agencies shall be qualified and evaluated as described in Practice E 543. The applicable edition of Practice E 543 shall be specified in the contractual agreement.

6.3 *Procedures and Techniques*—~~The procedures and techniques to~~ Timing of Examination

6.3.1 The timing of the examination shall be in accordance with a contractual agreement or with an established internal procedure.

6.4 *Extent of Examination*

6.4.1 The extent of the examination shall be as described in this practice accordance with 5.1.1 unless otherwise specified. ~~Sp~~

6.5 *Reporting Criteria/Acceptance*

6.5.1 Reporting criteria for the examination results shall be in accordance with Sections 12 and 13.

6.6 *Reexamination of Repaired/Reworked Items*

6.6.1 Reexamination of repaired/reworked items is not addressed in this standard and if required shall be specified in the a contractual agreement.

7. Examination Preparation

7.1 Before the examination begins, make the following preparations for AE monitoring:

7.1.1 Determine the type, number, and placement of sensors. This requires knowledge of both material and physical characteristics of the structure and the features of the instrumentation. This determination is also dependent upon the required precision and accuracy of the examination.

7.1.2 Establish communications between the control point for the application of the stimulus and the ~~AE-test~~ examination control center.

7.1.3 Provide a means for continuously recording a measure of the stimulus.

7.1.4 Identify potential sources of extraneous acoustic noise, such as vibration, friction, and fluid flow. Such sources may require acoustic isolation or control, in order not to mask valid acoustic emissions.

7.1.5 Attach the sensors; both the couplant and sensing device must be compatible with the surface conditions and the composition of the structural material being examined (see Guide E 650).

~~7.1.6 Calibrate~~

7.1.6 Verify the AE monitoring system in accordance with Section 9.

8. Safety Precautions

8.1 When ~~testing~~ examining vessels, ambient temperature should not be below the ductile-brittle transition temperature of the pressure vessel construction material.

9. Calibration and Standardization

9.1 Annual calibration and verification of pressure transducer, AE sensors, preamplifiers (if applicable), signal processor (particularly the signal processor time reference), and AE electronic waveform generator should be performed. Equipment should be adjusted so that it conforms to equipment manufacturer's specifications. Instruments used for calibrations must have current accuracy certification that is traceable to the National Institute for Standards and Technology (NIST).

9.2 Routine electronic evaluations (verification) must be performed any time there is concern about signal processor performance. A waveform generator should be used in making evaluations. Each signal processor channel must respond with peak amplitude reading within ± 2 dBV of the electronic waveform generator output.

9.3 A system performance ~~check~~ verification must be conducted immediately before, and immediately after, each ~~test~~ examination. A performance ~~check~~ verification uses a mechanical device to induce stress waves into the structure at a specified distance from each sensor. Induced stress waves stimulate a sensor in a manner similar to emission from a flaw. Performance ~~checks~~ verifications verify performance of the entire system (including couplant).

9.3.1 The preferred technique for conducting a performance ~~check~~ verification is a pencil lead break. Lead should be broken on the structure at a distance of 4 in. (100 to 102 mm) from the sensor centerline. 2H lead, 0.3 mm diameter, 0.1 in. (2 to 3 mm) long should be used (see Fig. 4 of Guide E 976). If circumstances require different values to be used, the values used shall be documented in the ~~test~~ examination report.

9.3.2 *Location Sensitivity Check*—A simulated AE source is created on the surface of the structure in order to check location sensitivity. Sensor source location sensitivity is determined as follows.

9.3.2.1 *Zone Location Sensitivity Check*—Each channel shall have the same system examination threshold. The simulated AE source generated anywhere on the vessel shall be detected by at least one sensor.

9.3.2.2 *Source Location Algorithm Sensitivity Check*—Each channel shall have the same system examination threshold. Two or more sensors define the structure mounted sensor array. The simulated AE source generated in each structure mounted sensor array shall be detected by the minimum number of sensors required to locate the source within ± 5 % of sensor spacing.

10. Examination Procedure

10.1 Acoustic emission data may be accumulated during or after stimulation of the structure, or both, as specified in the written procedure.

10.1.1 During application of the stimulus, the locations of acoustic sources are usually determined through analysis of the times of arrival of AE signals at multiple sensors. Such analysis may be performed through the use of an analog or digital computer. The computer accumulates and analyzes data over a specified parametric range. Examples of parameters are pressure, time, and stress. Each channel shall have the same system examination threshold. As the stimulus is applied, record the number and location of emitting sources and the amount of AE detected from each source. The AE rate at one or more sensors may be monitored and displayed in real time during stimulation. If the acoustic emission activity indicates a critically intense source, the AE operator shall stop the ~~test~~ examination and notify the owner of the structure or his designee immediately. The cause of the AE increase shall be investigated before continuing the stimulation schedule.

10.1.2 Continuous emission from any leak in a structure stimulated by pressure can mask acoustic emission from sources near the leak. Effects of leaks on acoustic emission measurements should be eliminated to adequately ~~test~~ examine pressure boundaries. Knowledge of attenuation in the structure and the response of sensors affected by leak noise may help localize the leak.

10.1.3 Following the ~~test~~, examination, repeat the performance ~~check~~ verification in accordance with 9.3.

11. Examination Records

11.1 All ~~sensitivity check~~ system performance verification data and instrument adjustments, including equipment description and performance data, shall be included in the records of the examination with all pertinent qualification/certification records and be signed by the responsible AE examiner. The information recorded should be sufficient to permit complete reanalysis of the results. This information should include, but not be limited to:

11.1.1 Location of AE ~~test~~, examination, material, physical characteristics of the structure, and manufacturer’s data sheet or tag data.

11.1.2 Sensor specifications, including size, sensitivity, frequency response, method of attachment, type of couplant, type and length of connecting cables.

11.1.3 Sensor locations.

11.1.4 Functional descriptions of signal conditioners, processors, and display equipment.

11.1.5 Stimulation schedule, AE monitoring procedures, and results of all sensitivity checks.

11.1.6 Method of stimulation and examination schedule.

11.1.7 Permanent data record of the measured AE signal parameters, in analog or digital form.

11.1.8 Stimulation medium temperature, ambient air temperature.

12. Interpretation of Results

12.1 All results shall be summarized on an appropriate layout map, displayed or tabulated or both, for ready reference and interpretation. This layout or tabulation shall display the location and classification of each source with pertinent comments.


12.1.1 *Source Location*—All location data resulting from analysis shall be presented in a manner consistent with the previously established calibration accuracy.

12.1.2 *Source Classification*—Sources are usually classified with respect to their acoustic activity and intensity.

12.1.2.1 A source’s acoustic activity is normally measured by event count or emission count. A source is considered to be *active* if its AE activity continues to increase with increasing or constant stimulus. A source is considered to be *critically active* if the rate of change of its AE activity with respect to the stimulus, consistently increases with increasing stimulation, or if the rate of change of its AE activity with respect to time, consistently increases with time under constant stimulus (see Fig. 1).

12.1.2.2 Preferred intensity measures of a source are its: average detected energy per event, average emission count per hit, or average amplitude per hit. A source is considered to be *intense* if it is active and its intensity measure consistently exceeds, by a specified amount, the average intensity of active sources. The intensity of a source can be calculated for increments of the stimulus or of hits. It is noted that, if there is only one active source, the intensity measure of the source is the average intensity of all sources, and therefore the intrinsic comparison no longer is applicable. In this case, it is necessary to classify the source through comparison with results from similar ~~tests~~ examinations.

12.1.2.3 When using source location algorithms, in addition to activity and intensity, another characteristic of each detected AE source that should be considered for source classification is the size of the “region” of the located source. The clustering of the located events from a sharp discontinuity, such as a crack, is usually dense, while regions of plastic deformation associated with, for example, corrosion pits, result in source areas that show more uncertainty in the definition of their size, the events being contained rather sparsely in the region. In most cases, a growing crack is considered to be the more serious defect. However, activity and intensity may not suffice for distinguishing between the two. Normally, there is subjective judgment on what size of location bundle or cluster constitutes an isolated source.

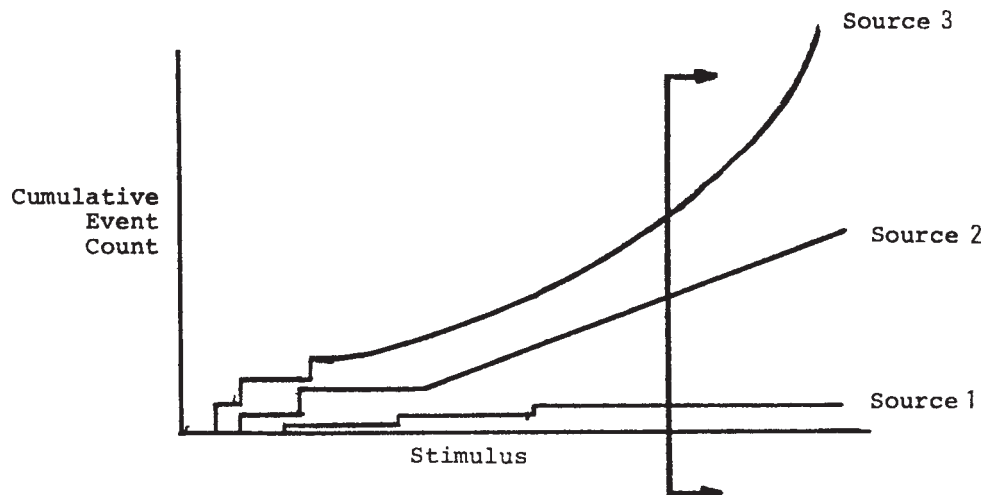

NOTE 1—To the right of the vertical line, Source 1 is inactive, Source 2 is active, and Source 3 is critically active.

FIG. 1 Schematic Representation of Three Different Source Types

12.1.3 *Source Evaluation*—Sources are usually evaluated by their activity or intensity. The procedure shall specify definitions for critically active and critically intense.

12.1.4 The significance of AE activity detected on a first hit sensor or zone location algorithm will be more easily definable if specific quantities (for example, 5 hits per sensor; 200 counts per sensor to operating pressure) are used.

13. Report

13.1 A report should contain at least the examination record, the interpretation of results, the method used for source location, and source locations indicated on a diagram of the vessel.


14. Keywords

14.1 active source; clustering; controlled stimulation; critically active source; critically intense source; intense source; leaks; loose parts; mechanical stress; pressure vessel; source location; source classification; thermal stress

ASTM International takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.

This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM International Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, at the address shown below.

This standard is copyrighted by ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, United States. Individual reprints (single or multiple copies) of this standard may be obtained by contacting ASTM at the above address or at 610-832-9585 (phone), 610-832-9555 (fax), or service@astm.org (e-mail); or through the ASTM website (www.astm.org).

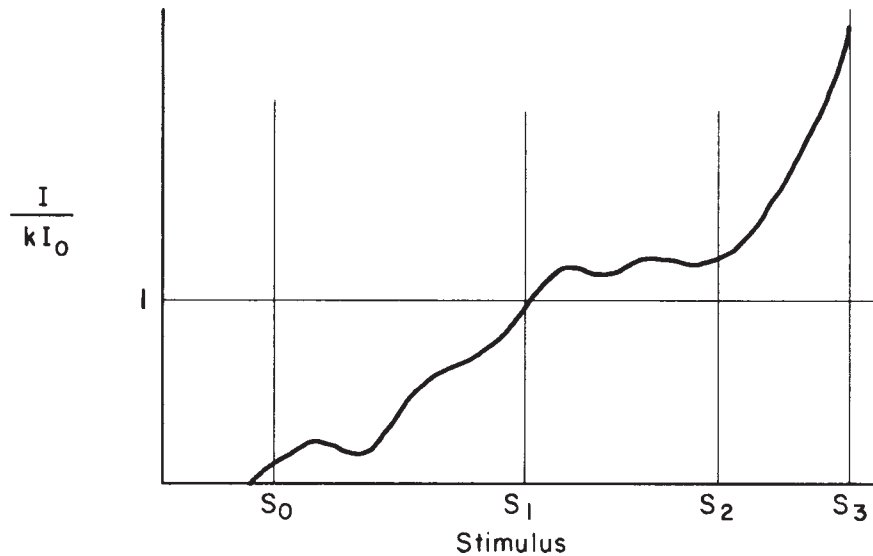

NOTE 1—Four different regions are shown: prior to S_0 , the source was inactive; between S_0 and S_1 , the source was of low intensity; between S_1 and S_2 , the source is classified as intense; between S_2 and S_3 , the source is classified as critically intense.

FIG. 2 Source Intensity, I , Divided by a Weighted Average Intensity of All Sources, kI_0 , Plotted Against the Stimulus, S