




- ▶ Edge of Dock Levelers LD
- ▶ Edge of Dock Leveler EP



1-800-741-1258
Mon-Fri
8:00-7:00 EST

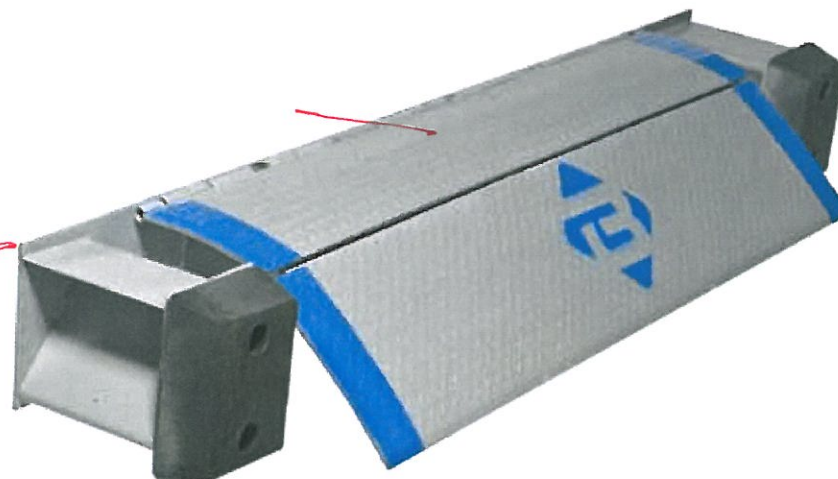

Stop
Stop
for th
dock.

Search

Dock Bumpers

- [Molded Bumpers](#)
- [D Bumpers](#)
- [Wheel Chocks](#)
- [Corner Guards](#)

Dockboards

- [Aluminum Dockplates](#)
- [Aluminum Dockboards](#)
- [Steel Dockboards](#)
- [Heavy Duty Dockboards](#)
- [Yard Ramps](#)
- [Walk Ramps](#)

Dock Lights

- [Dock Lights](#)
- [Utility Lights](#)

Wheel Risers

Yard Ramps

Corner Guards

The Edge of Dock Leveler (Permanent Dock Board)

Fast and easy to operate, Bluff's edge of dock leveler (Board) is positioned by lifting a self-storing handle and pulling the handle to the dock floor. The latch assembly activates the lip forward to the floor of the trailer as the handle is lifted. When released, the handle automatically returns to a stored position. The optimum dock height for conventional trailers is 51", while the proper dock height for refrigerated equipment is 55". A Refrigerated lip is optional. Widths are 66", 72" and 78".

Capacities from 20,000 pounds to 25,000 pounds.



Man Baskets

Strip Doors

Assembled Strip Doors

Strip Door Kits

Bulk PVC Material

Curtain Walls

Warning Lights

Strobe Lights

Rotating Lights

Stop and Go Lights



EZ-PULL EDGE OF DOCK LEVELERS (Permanent dock boards)

Instant credit to all government agencies.

Table 1
These boards are for freight line trailers.

Model	Capacity	Lip Length	Usable Width	Overall Width	Span	Weight
<u>20EP66</u>	20,000	15"	66"	88"	27 3/4"	505
<u>20EP72</u>	20,000	15"	72"	94"	27 3/4"	545
<u>20EP78</u>	20,000	15"	78"	100"	27 3/4"	585
<u>25EP66</u>	25,000	15"	66"	88"	27 3/4"	562
<u>25EP72</u>	25,000	15"	72"	94"	27 3/4"	606
<u>25EP78</u>	25,000	15"	78"	100"	27 3/4"	657

Table 2
These boards are for refrigerated trailers.

Model	Capacity	Lip Length	Usable Width	Overall Width	Span	Weight
<u>20EP66-R</u>	20,000	17"	66"	88"	29 3/4"	520
<u>20EP72-R</u>	20,000	17"	72"	94"	29 3/4"	560
<u>20EP78-R</u>	20,000	17"	78"	100"	29 3/4"	610
<u>25EP66-R</u>	25,000	17"	66"	88"	29 3/4"	580
<u>25EP72-R</u>	25,000	17"	72"	94"	29 3/4"	626
<u>25EP78-R</u>	25,000	17"	78"	100"	29 3/4"	680

Installation materials for permanently mounted edge of dock levelers.



Model	Options	Weight
EPAP12C	12" Long beveled approach plate 120" wide with 5 each 13/16" counter sunk holes for mounting to top of dock.	164
EPAP24C	24" Long beveled approach plate 120" wide with 5 each 13/16" counter sunk holes for mounting to top of dock.	327
EPAP1	Fastener kit for EPAP12C & EPAP24C. Consists of 5 each 1/2" double expansion shields and 5 each 1/2" - 13x3" flat head socket screws.	3
EPAP2	Fastener kit for installation of the leveler. Consists of 9 each 3/4" x 4" wedge anchor bolts including the nuts & washers.	6
EPAP3	Fastener kit for installation of the leveler and approach plate or a lo dock leveler. Consists of 9 each 3/4" x 4" wedge anchor bolts including the nuts & washers. Also consists of 5 each 1/2" x 13" x 3" flat head socket screws and 5 each 1/2" double expansion shields.	6

[Home](#) | [Dock Bumpers](#) | [Dockboards](#) | [Dock Lights](#) | [Strip Doors](#) | [Warning Lights](#) | [Edge of Dock Levelers](#) | [Safety](#)

Your One Stop Shop For Loading Dock Equipment, Dock Bumpers, Dock Boards, Yard Ramps, Dock Lights, & Equipment

sales@loadingdocksupply.com

[Contact Us](#)

1-800-741-1258

PO Box 15
Ashley, OH 43003

Serving Ohio, Alabama, Alaska, Arizona, Arkansas, California, Colorado, Connecticut, Delaware, Florida, Georgia, Illinois, Indiana, Iowa, Kansas, Kentucky, Louisiana, Maine, Maryland, Massachusetts, Michigan, Minnesota, Missouri, Montana, Nebraska, Nevada, New Hampshire, New Jersey, New Mexico, New York, North Carolina, Oklahoma, Oregon, Pennsylvania, Rhode Island, South Carolina, South Dakota, Tennessee, Texas, Utah, Vermont, Washington, West Virginia, Wisconsin, Wyoming