# ROOM FINISH SCHEDULE

| NAME | | FLOOR | | | | | | BASE | | | | WALL | | | | | CEILING | | | | | REMARKS |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | V.C.T. | CERAMIC TILE | CONC. W/SEALER | | | | VINYL BASE | CERAMIC TILE | NONE | | GYP. BD. PAINTED | CERAMIC TILE TO 42" HT. | DENSGLAS | PLYWOOD | EXPOSED STRUCTURE | 2'x4' SUSP. ACOUST. | EXPOSED STRUCTURE | | | C.G. HGT. | NOTE: INSTALL MOISTURE RESISTANT GYPSUM BOARD (PAINTED) ON WALLS ABOVE CERAMIC TILE IN RESTROOMS/BATHROOMS WITH CERAMIC TILE TO 42" HEIGHT. |
| 100 | OFFICE | | | ● | | | | ● | | | | ● | | | | | ● | | | | 9'-0" | |
| 101 | HALL | | | ● | | | | ● | | | | ● | | | | | ● | | | | 9'-0" | |
| 102 | MENS RESTROOM | | | ● | | | | ● | | | | ● | | | | | ● | | | | 9'-0" | |
| 103 | UTILITY | | | ● | | | | ● | | | | ● | | | | | ● | | | | 9'-0" | |
| 104 | WOMENS RESTROOM | | | ● | | | | ● | | | | ● | | | | | ● | | | | 9'-0" | |
| 105 | WAREHOUSE | | | ● | | | | | | ● | | | | ● | ● | ● | | | ● | | VARIES | |
| | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | |

# DOOR & HARDWARE SCHEDULE

| NO. | SIZE | TYPE | | | | | | FRAME | | | | HINGE | | LOCK | | | | ACCESS. | | | | | | REMARKS |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | S.F. W/FULL GLASS | S.C. WOOD | STEEL ROLL-UP | HOLLOW METAL | NONE | MARK | ALUMINUM | HOLLOW METAL | STEEL TRACK | MARK | BUTT | NONE | PASSAGE | PRIVACY | KEYED HANDLE | NONE | THRESHOLD | WEATHERSTRIP | DOOR STOP | CLOSER | NONE | | NOTE: INSTALL TRANSITION THRESHOLDS WHERE FLOOR MATERIALS CHANGE. ALL EXTERIOR THRESHOLDS TO BE ADA COMPLIANT. |
| - | 3'0x7'0 | ● | | | | | A | ● | | | B | ● | | | | ● | | ● | ● | ● | | | | |
| 2 | 3'0x7'0 | | ● | | | | B | | ● | | B | ● | | | ● | | | ● | | ● | ● | | | |
| 3 | 3'0x7'0 C.O. | | | | | ● | C | | | | - | | ● | | | | ● | | | | | ● | | CASED OPENING |
| 4 | 3'0x7'0 | | ● | | | | B | | ● | | B | ● | | | | ● | | | | ● | ● | | | |
| 5 | 14'0x14'0 | | | ● | | | E | | | ● | C | | | | | ● | | ● | ● | | | | | ROLL-UP DOOR |
| 6 | 3'0x7'0 | | | | ● | | D | | ● | | B | ● | | | | ● | | ● | ● | ● | | | | |
| 7 | 10'0x14'0 | | | ● | | | F | | | ● | C | | | | | ● | | ● | ● | | | | | ROLL-UP DOOR |
| | | | | | | | | | | | | | | | | | | | | | | | | |

## WINDBORNE DEBRIS PROTECTION FASTENING SCHEDULE FOR WOOD STRUCTURAL PANELS

| FASTENER TYPE | FASTENER SPACING | | |
|---|---|---|---|
| | PANEL SPAN ≤ 4 FOOT | 4 FOOT PANEL SPAN ≤ 6 FOOT | 6 FOOT PANEL SPAN ≤ 8 FOOT |
| 2-1/2" #6 WOOD SCREWS | 16" | 12" | 9" |
| 2-1/2" #8 WOOD SCREWS | 16" | 16" | 12" |

WINDOWS IN BUILDINGS LOCATED IN WIND BORNE DEBRIS REGIONS SHALL HAVE GLAZED OPENINGS PROTECTED FROM WINDBORNE DEBRIS. WOOD STRUCTURAL PANELS WITH A MIN. THICKNESS OF 7/16" AND A MAX. SPAN OF 8 FEET SHALL BE PERMITTED FOR OPENING PROTECTION IN ONE AND TWO STORY BUILDINGS. PANELS SHALL BE PRECUT TO COVER THE GLAZED OPENINGS WITH ATTACHMENT HARDWARE PROVIDED.

# GENERAL NOTES

1. INSULATION AND INSULATION ASSEMBLIES SHALL MEET THE REQUIREMENTS OF SECTION 719.
   A. CONCEALED INSULATION SHALL HAVE A FLAME SPREAD OF 0-25 AND SMOKE DEVELOPED INDEX OF 0-450. EXCEPT THAT IN COMBUSTIBLE (WOOD FRAME) CONSTRUCTION.
   B. FACING SHALL COMPLY WITH IBC 2006.
2. PROVIDE 5'x5' LANDINGS, LEVEL WITH FINISHED FLOOR, OUTSIDE EXTERIOR DOORS ON WEST SIDE OF BUILDING. THRESHOLDS SHALL BE NOT MORE THAN 1/2" IN HEIGHT AND SHALL BE BEVELED IF MORE THAT 1/4".
3. CONTRACTOR TO VERIFY ALL SITE CONDITIONS, BUILDING LOCATIONS, AND DIMENSIONS PRIOR TO CONSTRUCTION.
4. MATERIALS SHALL BE NEW AND U.L. LISTED.
5. NO WORK SHALL BE CONCEALED UNTIL APPROVED BY LOCAL INSPECTORS.
6. CONSTRUCTION SHALL COMPLY WITH ALL PARISH, STATE, AND LOCAL CODES.
7. CONTRACTOR TO GUARANTEE WORK FOR ONE YEAR.
8. CONTRACTOR SHALL FURNISH WATER AND POWER FROM EXISTING SOURCES.
9. EXTERIOR CAULKING SHALL BE THIOKAL CAULK.
10. PAINT GRADE TO SHALL BE SHERWIN WILLIAMS OR EQUIVALENT. ALL WORK TO RECEIVE 3 COATS. COLOR SELECTION BY OWNER.
11. PROVIDE CLEANUP ON A REGULAR BASIS. NO TRASH STORED IN BUILDING.
12. ALL BATT INSULATION SHALL HAVE A CLASS "A" (0-25) FLAME SPREAD IN COMPLIANCE WITH APPLICABLE CODE.
13. USE 6" STUDS, OR 4" STAGGERED STUDS AT ALL PLUMBING WALLS.
14. PROVIDE GALVANIZED METAL PAN WITH DRAIN AT WATER HEATER LOCATION.
15. ALL CORNERS SHALL BE PROPERLY BRACED FOR WIND LOADS. A 48" SHEATHING SHALL BE PROVIDED EVERY 20 FEET OF WALL LENGTH.
16. INTERIOR LOCKS ON DOORS IN MEANS OF EGRESS SHALL NOT REQUIRE THE USE OF A KEY, SPECIAL KNOWLEDGE, OR SPECIAL DEVICE TO OPEN IN THE DIRECTION OF EGRESS. ALL DOORS SHALL HAVE LEVER TYPE HANDLES.
17. INTERIOR WALLS AND CEILINGS SHALL HAVE A FLAME SPREAD OF 0-200 AND A SMOKE DEVELOPMENT RATING OF 0-450.
18. ALL WORK SHALL COMPLY WITH THE LATEST EDITION OF ALL LOCAL, STATE, AND NATIONAL CODES COVERING THE TYPE OF WORK BEING PERFORMED.
19. PROVIDE PORTABLE FIRE EXTINGUISHERS IN ACCORDANCE WITH NFPA 101. SEE APPENDIX "E" OF NFPA 101 FOR DISTRIBUTION OF EXTINGUISHERS.
20. ALL FIRE WALLS SHALL EXTEND TIGHT TO ROOF DECK AND BE SEALED WITH AN APPROVED FIRE CAULK.
21. ALL ELECTRICAL, MECHANICAL, AND PLUMBING MATERIALS PENETRATING FIRE WALLS SHALL BE FIRE CAULKED. (PENETRATIONS THROUGH RATED CONSTRUCTION SHALL BE SEALED WITH A MATERIAL CAPABLE OF PREVENTING THE PASSAGE OF FLAMES AND HOT GASES WHEN TESTED IN ACCORDANCE WITH ASTM-E814.)
22. SERVICE COUNTER SHALL HAVE A HCP ACCESSIBLE WRITING SURFACE, MAX. 36" FROM F.F. (ADAAG MANUAL 1998, PG 135)

# DOOR TYPES

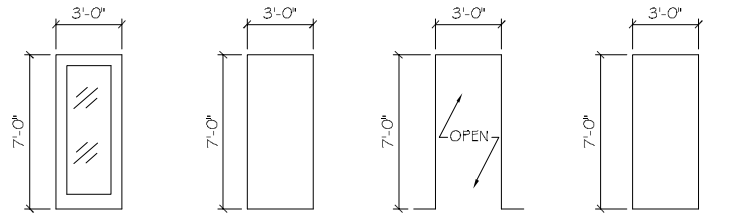


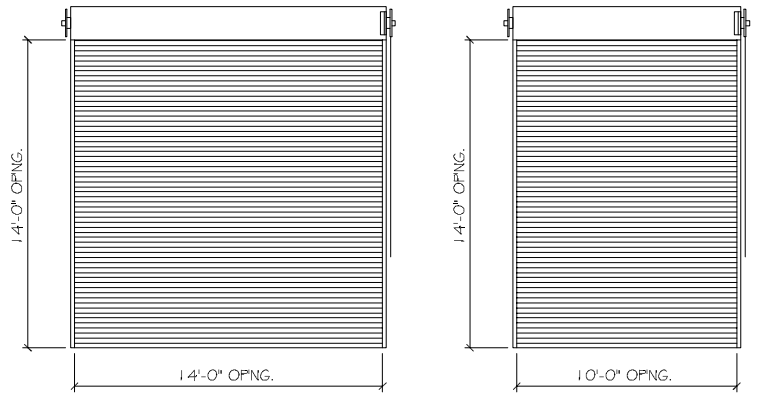


# DOOR FRAMES

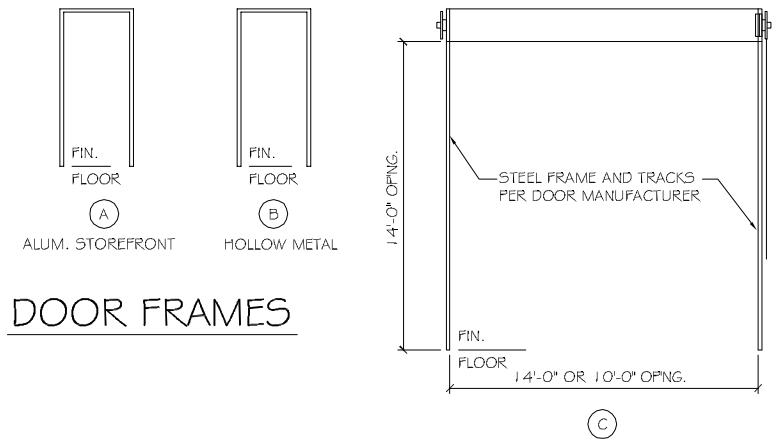


# WINDOW TYPES

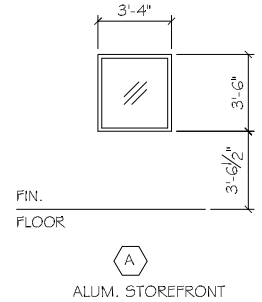


DAMMON ENGINEERING INC
Architects & Engineers

CHIEF ENGINEER: EMMETT DAMMON, P.E.
CHIEF ARCHITECT: KEVIN KINCHEN
5747 OLD SPANISH TRAIL
SLIDELL, LA 70458

BULK SYSTEM'S NEW OFFICE/WAREHOUSE BUILDING
1226 REMEAUX AVENUE
SLIDELL, LOUISIANA 70458

| | |
|---|---|
| 2173 | 04-23-2013 |
| | JTL |

REVISIONS

| # | DESCRIPTION | DATE |
|---|---|---|

SCHEDULES AND NOTES

SHEET No: 10 OF 20

A2