

ROOF NOTES

1. ALL DIMENSIONS OF EXIST CONDITIONS ARE APPROXIMATE AND SHOULD BE VERIFIED IN FIELD.
2. GENERAL ROOF SLOPE: 1/4" PER FOOT UNLESS NOTED OTHERWISE.
3. 1/4" GUTTERS SHALL HAVE EXPANSION JOINTS SPACED NOT TO EXCEED 90' GRADE OR ROOF BELOW.
4. PROPOSED 99.9% ASH BLOCKS WHERE EXIST DOWNPOUT TERMINATES AT EXCEED 90'-0" - SEE 8/A2 FOR DPE JT ASSEMBLY DETAIL.
5. ALL NEW 1/4" GUTTERS TO HAVE EXPANSION JOINTS WITH A SPACING NOT TO EXCEED 90'-0" - SEE 8/A2 FOR DPE JT ASSEMBLY DETAIL.

LEGEND

	NEW MODIFIED BITUMEN ROOF MEMBRANE SYSTEM WITH 2 1/2" POLYISOCYANURATE INSULATION BOARD INFILL.
	NEW MODIFIED BITUMEN ROOF MEMBRANE SYSTEM WITH TAPERED POLYISOCYANURATE INSULATION BOARD INFILL.
	EXIST MODIFIED BITUMEN ROOF MEMBRANE WITH NEW PARACOURT ROOF COATING.
	EXIST OVERHEAD (OH) ELEC LINES. CONTRACTOR TO VERIFY ALL CLEARANCES WHERE NECESSARY TO CONDUCT WORK.

KEYNOTES

1	NEW 888 MODIFIED BITUMEN ROOF SYSTEM. SEE LEGEND ABOVE FOR INSULATION SUBSTRATE INFORMATION.
2	NEW PRE-FINISHED 1/4" GUTTER. SEE SHEET A2 FOR DETAILS AND 1/A2 FOR GUTTER PROFILE.
3	GUTTER EXPANSION JOINT. SEE 8/A2 FOR ASSEMBLY DETAIL.
4	NEW PRE-FINISHED 6"x6" 1/4" DOWNPOUT. D/S PROFILE TO MATCH SWAGMAN MANUAL PG. 1-233. SET D/S 1/2" AWAY FROM WALL AND PROVIDE HANGERS (16GA X1) SPACED NOT MORE THAN 10'-0" OC. HANGER CONFIGURATION TO MATCH EXISTING DOWNPOUTS TO REMAIN. CONTRACTOR TO VERIFY CORRECT HANGER AND COMPONENT WITH 16GA 1/4" TO MEET ROOFING MEMBRANE MFR REQUIREMENTS.
5	REPAIR EXIST ROOF DECK DAMAGE WITH 2 1/2" GYPSUM CONC PATCH. SCOPE OF DAMAGE APPROX 12 SF. CONTRACTOR TO FIELD VERIFY SCOPE OF NEEDED REPAIRS AND REPORT TO ARCHITECT.

SITE NOTES


1. CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIR TO EXIST BUILDING/SITE ELEMENTS PRIOR TO THE RESUMPTION OF SCHOOL SCHEDULE.
2. PEDESTRIAN ACCESS TO BUILDING ENTRANCE AT FOURTH STREET IS TO BE MAINTAINED AT ALL TIMES.

DAMMON ENGINEERING, INC.
Architects & Engineers

Chief Architect: Kevin J. Kinchen, NCARB
554 Old Spanish Trail
Slidell, LA 70458

dammonengineering.com
dammon@slidellsouth.net
Ph: 985.644.5832
F: 985.641.5990

NO.	DESCRIPTION	DATE

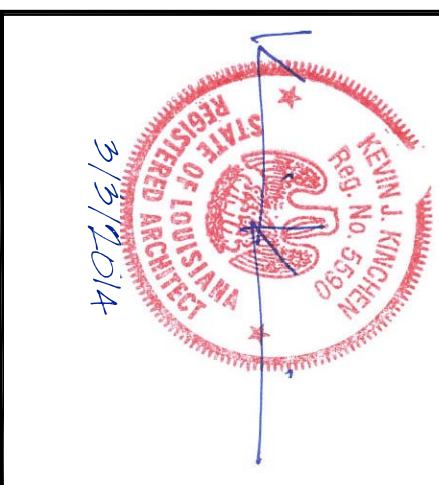

REROOFING OF OLD 6TH GRADE WING:
SLIDELL SCHOOL HIGH SCHOOL

393 PENNSYLVANIA AVENUE ST. TAMMANY SCHOOL BOARD
SLIDELL, LA 70458 PROJECT 1921

JOB No: 2191 DATE: MARCH 9, 2014
DRAWN BY: KJK CHECKED BY: KJK

ROOF PLAN

DRAWING NUMBER: **A1**

SHEET NO. 2 OF 5