

Hazards by Location

Search Information


Address: 72360 LA-41, Pearl River, LA 70452, USA

Coordinates: 30.4814108, -89.8080602

Elevation: ft

Timestamp: 2019-11-13T22:45:10.326Z

Hazard Type: Wind

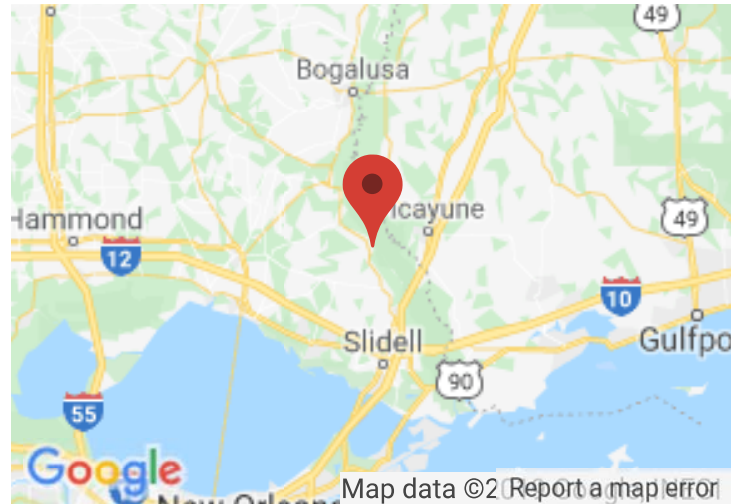

ASCE 7-16

MRI 10-Year 79 mph

MRI 25-Year 90 mph

MRI 50-Year 102 mph

MRI 100-Year 113 mph

Risk Category I 128 mph

Risk Category II ⚠ 139 mph

You are in a wind-borne debris region if you are also within 1 mile of the coastal mean high water line.

Risk Category III ⚠ 149 mph

If the structure under consideration is a healthcare facility and you are also within 1 mile of the coastal mean high water line, you are in a wind-borne debris region. If other occupancy, use the Risk Category II basic wind speed

ASCE 7-10

MRI 10-Year 77 mph

MRI 25-Year 91 mph

MRI 50-Year 102 mph

MRI 100-Year 112 mph

Risk Category I .. 128 mph

Risk Category II ⚠ 139 mph

You are in a wind-borne debris region if you are also within 1 mile of the coastal mean high water line.

Risk Category III-IV ⚠ 149 mph

If the structure under consideration is a healthcare facility and you are also within 1 mile of the coastal mean high water line, you are in a wind-borne debris region. If other occupancy, use the Risk

ASCE 7-05

ASCE 7-05 ⚠ 118 mph
Wind Speed

You are in a wind-borne debris region if you are also within 1 mile of the coastal mean high water line.