1. ROOM FINISH SCHEDULE

SCALE: NONE

RM. NO.	ROOM NAME	FLOORING					BASE					WALLS					CEILING					CLG. HGT.	REMARKS	RM. NO.
		1 EXISTING TO REMAIN	2 NEW CARPET TILE, MATCH EXISTING	3 NEW VINYL TILE, MATCH EXISTING	4 NEW CERAMIC TILE, MATCH EXISTING	5 NONE	1 EXISTING TO REMAIN	2 NEW WOOD, MATCH EXISTING	3 NEW 4" RUBBER, MATCH EXISTING	4 NEW CERAMIC TILE, MATCH EXISTING	5 NONE	1 EXISTING TO REMAIN	2 NEW GYPSUM BOARD, MATCH EXISTING	3 NEW CERAMIC TILE WAINSCOAT			1 EXISTING TO REMAIN	2a NEW 2' x 4' ACOUS. TILE, MATCH EXIST.	3a NEW GYPSUM BOARD, MATCH EXIST.					
100	CORRIDOR	1					1					1					1					EXIST.		
101	WAITING AREA #1	1					1					1					1					EXIST.		
102	BIPPO	1					1					1					1					EXIST.		
103	CAVE	1					1					1					1					EXIST.		
104	WAITING AREA #2	1					1					1					1					EXIST.		
105																						EXIST.		
106	WAITING AREA #3	1	2				1	2				1	2				1	2				EXIST.		
107	---																					EXIST.		
108	---																					EXIST.		
109	---																					EXIST.		
110	---																					EXIST.		
111	---																					EXIST.		
112	---																					EXIST.		
113	---																					EXIST.		
114	---																					EXIST.		
115	---																					EXIST.		
116	FORMS	1					1	2				1	2				1					EXIST.		
117	CORRIDOR	1					1	2				1	2				1					EXIST.		
118	CONSULT #3	1					1	2				1	2				1					EXIST.		
119	FAN	1					1					1					1					EXIST.		
120	X-RAY	1					1					1					1					EXIST.		
121	---																					EXIST.		
122	EXAM AREA	1	2				1	2				1	2				1	2				EXIST.		
123	RECALL ROOM #1	1	2				1	2				1	2				1	2				EXIST.		
124	---																					EXIST.		
125	EXAM AREA	1	2				1	2				1	2				1	2				EXIST.		
126	---																					EXIST.		
127	---																					EXIST.		
128	TANK ROOM	1					1					1					1					EXIST.		
129	SUCTION	1					1					1					1					EXIST.		
130	CORRIDOR	1					1					1					1					EXIST.		
131	HVAC CLOSET	1					1					1					1					EXIST.		
132	LABORATORY	1					1					1					1					EXIST.		
133	OPERATIONS	1					1					1					1					EXIST.		
134	HVAC CLOSET	1					1					1					1					EXIST.		
135	CORRIDOR	1	2				1	2				1	2				1					EXIST.		
136	COMPUTER	1					1					1					1					EXIST.		
137	OFFICE	1					1					1					1					EXIST.		
138	---																					EXIST.		
139	---																					EXIST.		
140	CORRIDOR	1	2				1	2				1	2				1					EXIST.		
141	TOILET ROOM	1					1					1					1					EXIST.		
142	CONSULT #1	1					1					1					1					EXIST.		
143	FILE ROOM	1					1					1					1					EXIST.		
144	BIPPO #2	1					1					1					1					EXIST.		
145	STAIRS	1					1					1					1					EXIST.		
146	RECEPTIONIST #1	1					1					1					1					EXIST.		
147	RECEPTIONIST #2	1					1					1					1					EXIST.		
148	FORMS	1					1					1					1					EXIST.		
150*	---																					9'-0"		
151*	TREATMENT	1	2				1	2				1	2				1	2				9'-0"		
152*	WAITING		2				1	2				1	2				1					9'-0"		
153*	ADULT/TEEN WAITING AREA		2					2					2					2				9'-0"		
154*	WAITING AREA		2					2					2					2				9'-0"		
155*	SPRINKLER SYSTEM				5					5			2						3			10'-0"		
156*	TODDLER WAITING AREA		2					2					2					2				9'-0"		
157*	PLAY AREA		2					2					2						3			22'-0"		
158*	CONSULT		2					2					2					2				9'-0"		
159*	TOILET ROOM				4					4			2	3					3			8'-0"		
160*	TOILET ROOM				4					4			2	3					3			8'-0"		
161*	CORRIDOR		2					2					2					2				9'-0"		
162*	TREATMENT		2					2					2					2				9'-0"		
163*	CLOSET		2					2					2					2				9'-0"		
164*	OFFICE		2					2					2					2				9'-0"		
165*	OFFICE		2					2					2					2				9'-0"		
166*	OFFICE		2					2					2					2				9'-0"		
167*	CORRIDOR		2					2					2					2				9'-0"		
168*	TREATMENT		2					2					2					2				9'-0"		
169*	CLOSET		2					2					2					2				9'-0"		
170*	FILES		2					2					2					2				9'-0"		
171*	CORRIDOR		2					2					2					2				9'-0"		
172*	TREATMENT		2					2					2					2				9'-0"		
173*	CLOSET		2					2					2					2				9'-0"		
174*	TREATMENT		2					2					2					2				9'-0"		
175*	CLOSET		2					2					2					2				9'-0"		
176*	TOILET ROOM				4					4			2	3					3			8'-0"		
177*	LABORATORY			3					3				2					2				9'-0"		
178*	HOLDING		2					2					2					2				9'-0"		
179*	CLOSET		2					2					2					2				9'-0"		

2. DOOR SCHEDULE

SCALE: NONE

MARK	DESCRIPTION	ELEV.	FRAME	GLAZING	REMARKS	MARK
01	EXISTING DOOR AND FRAME UNIT TO REMAIN	---	EXISTING	---	EXISTING TO REMAIN	01
02	3'-0" x 6'-8" x 1 3/4" SOLID CORE "FLUSH" WOOD DOOR	5-A05.1	WOOD	---	TYPICAL DOOR, TO MATCH EXISTING	02
03	3'-0" x 6'-8" x 1 3/4" WOOD and GLASS DOOR	6-A05.1	WOOD	1/4" SAFETY		03
04	2 - 2'-6" x 6'-8" x 1 3/4" WOOD BI-FOLD DOORS	7-A05.1	WOOD	---	TYPICAL BI-FOLD CLOSET DOORS.	04

3. WINDOW SCHEDULE

SCALE: NONE

MARK	DESCRIPTION	ELEV.	FRAME	GLAZING	REMARKS	MARK
A	EXISTING TO REMAIN	---	EXISTING	EXISTING	EXISTING TO REMAIN	A
B	2'-0" x 3'-0" SINGLE HUNG ALUMINUM WINDOW (EXTERIOR)	8-A05.1	ALUM.	IMPACT RESIST.	FRAMES AND GLAZING TO BE IMPACT RATED	B
C	3'-0" x 5'-0" SINGLE HUNG ALUMINUM WINDOW (EXTERIOR)	9-A05.1	ALUM.	IMPACT RESIST.	FRAMES AND GLAZING TO BE IMPACT RATED	C
D	3'-0" x 5'-0" SINGLE HUNG ALUMINUM WINDOW (INTERIOR)	9-A05.1	ALUM.	DBL. INSULATED	INSTALLED AT INTERIOR, NOT IMPACT RATED	D

IMPACT GLAZING NOTES: WINDOWS / STOREFRONT IN EXTERIOR WALLS.

1. Per IBC 2009 - Section 1609.1.2, Impact glazing is required in the following areas:

   a. Portions of hurricane prone regions, within 1 mile of the coast, where the basic wind speed is 110 mph or greater.

   b. Portions of hurricane prone regions where the basic wind speed is 120 mph or greater.

   c. Hawaii.

2. Per IBC 2009 - Figure 1609, property is located in a 120 - 130 mph wind zone.

3. Per IBC 2009 - Figure 1609 - Note 2, Linear interpolation of wind contours is permitted.

4. The Louisiana State Uniform Construction Code Council has performed "Linear Interpolation" of wind contours based on zip code. The subject property has been found to be located in the 125 mph wind zone.

5. Per IBC 2009 - Section 1609.1.2 Impact Glazing is required, and shall conform to:

   a. Glazed openings located within 30 feet of grade shall meet the requirements of the Large Missile Test of ASTM E 1996

   b. Glazed openings located more than 30 feet above grade shall meet the requirements of the Small Missile Test of ASTM E 1996.

4. STOREFRONT SCHEDULE

SCALE: NONE

MARK	DESCRIPTION	ELEV.	FRAME	GLAZING	REMARKS	MARK
E	10'-9" x 17'-0" ALUMINUM STOREFRONT SYSTEM (EXTERIOR)	10-A05.1	ALUM.	IMPACT RESIST.	FRAMES AND GLAZING TO BE IMPACT RATED	E
F	10'-9" x 8'-6" ALUMINUM STOREFRONT SYSTEM (INTERIOR)	11-A05.1	ALUM.	DBL. INSULATED	INSTALLED AT INTERIOR, NOT IMPACT RATED	F
G	10'-9" x 8'-6" ALUMINUM STOREFRONT SYSTEM, WITH 3'-0" x 6'-8"	12-A05.1	ALUM.	DBL. INSULATED	INSTALLED AT INTERIOR, NOT IMPACT RATED	G
	ALUMINUM STOREFRONT DOOR AT CENTER (INTERIOR)					
H	14'-4 1/2" x 5'-6" ALUMINUM STOREFRONT SYSTEM (INTERIOR)	13-A05.1	ALUM.	DBL. INSULATED	INSTALLED AT INTERIOR, NOT IMPACT RATED	H

IMPACT GLAZING NOTES: WINDOWS / STOREFRONT IN EXTERIOR WALLS.

1. Per IBC 2009 - Section 1609.1.2, Impact glazing is required in the following areas:

   a. Portions of hurricane prone regions, within 1 mile of the coast, where the basic wind speed is 110 mph or greater.

   b. Portions of hurricane prone regions where the basic wind speed is 120 mph or greater.

   c. Hawaii.

2. Per IBC 2009 - Figure 1609, property is located in a 120 - 130 mph wind zone.

3. Per IBC 2009 - Figure 1609 - Note 2, Linear interpolation of wind contours is permitted.

4. The Louisiana State Uniform Construction Code Council has performed "Linear Interpolation" of wind contours based on zip code. The subject property has been found to be located in the 125 mph wind zone.

5. Per IBC 2009 - Section 1609.1.2 Impact Glazing is required, and shall conform to:

   a. Glazed openings located within 30 feet of grade shall meet the requirements of the Large Missile Test of ASTM E 1996

   b. Glazed openings located more than 30 feet above grade shall meet the requirements of the Small Missile Test of ASTM E 1996.

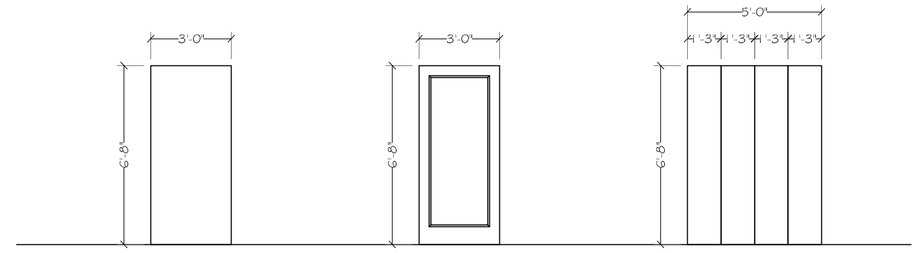

5. 6. 7.

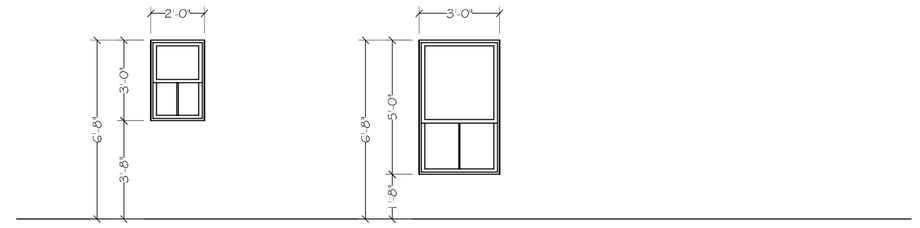

8. 9.

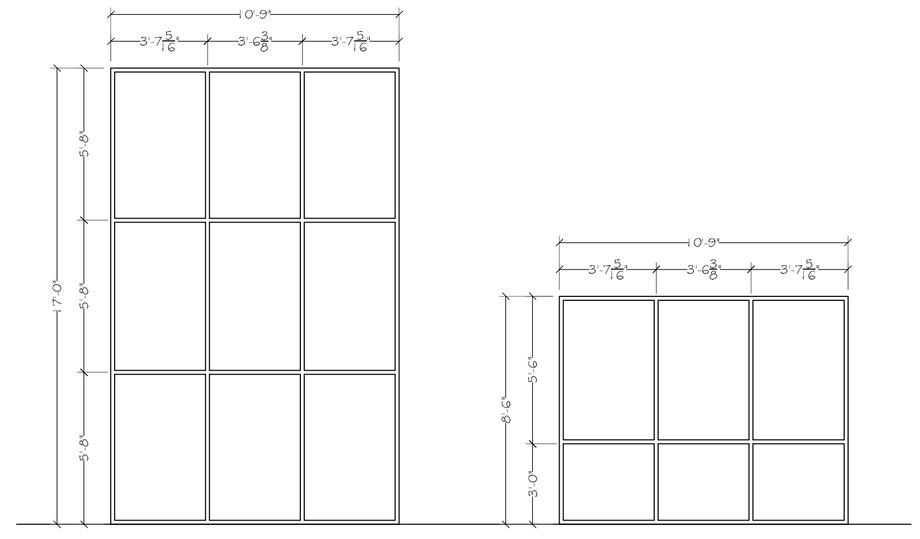

10. 11.

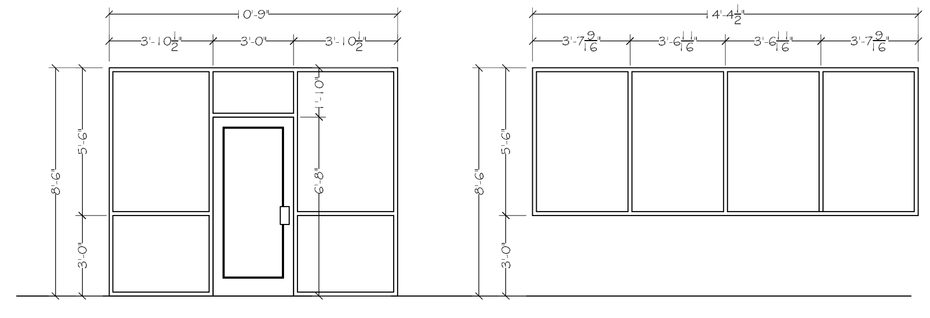

12. 13.

project 3312 [redacted]

date 3/26/13

revisions

Piazza Architecture Planning APAC
Mandeville Louisiana

PROGRESS SET, NOT FOR CONSTRUCTION

P.A.P. © 2013

RENOVATIONS and ADDITIONS TO:

~ BIPPO'S PLACE FOR SMILES ~

2960 GAUSE BOULEVARD EAST
SLIDELL • LOUISIANA

sheet A05.1 of