




PANEL: PL-1  
 LOCATION:  
 FEEDER SOURCE: GLECO

VOLTAGE: 120/240V, 200A MAINS 1ø, 3ø  
 ENCLOSURE: RECESSED MOUNTED w/GROUND BUS KIT  
 w/ MAIN BREAK, MINIMUM S.C. CAPACITY = 10,000 A SYA

CIR	LOAD DESCRIPTION		BREAKER	LOAD (VA)	CIR	LOAD DESCRIPTION		BREAKER	LOAD (VA)	CIR	
	LOCATION	AMP				POLE	LOCATION				AMP
1	LOPL. HJ MASTER	20	1		1	LOPL. BEDROOM 2	20	1		2	
2	LOPL. BEDROOM 2	20	1		1	LOPL. BEDROOM 4	20	1		4	
3	LOPL. HATCH	20	1		1	LOPL. DINING ROOM	20	1		6	
4	LOPL. HJ	20	1		1	LOPL. HJ	20	1		8	
5	RECESSED LOPL. LIVING ROOM	20	1		1	RECESSED LOPL.	20	1		10	
6	RECESSED LOPL.	20	1		1	RECESSED LOPL.	20	1		12	
7	OUTDOOR SECURITY LOPL.	20	1		1	OP. RECEPTACLE	20	1		14	
8	RECEPTACLES garage	20	1		1	RECEPTACLES Bedroom 2	20	1		16	
9	OP. RECEPTACLE	20	1		1	RECEPTACLES Bedroom 4	20	1		18	
10	RECEPTACLES Master	20	1		1	RECEPTACLES Dining Room	20	1		20	
11	RECEPTACLES Bedroom 2	20	1		1	RECEPTACLES 2nd bath	20	1		22	
12	RECEPTACLES Bedroom 4	20	1		1	RECEPTACLES Living Room	20	1		24	
13	RECEPTACLES Master Bath	20	1		1	RECEPTACLES ON OUTSIDE	20	1		26	
14	RECEPTACLES Laundry Room	20	1		1	220V REC IN GARAGE	2000	2		28	
15	RECEPTACLES HJ	20	1		1	220V REC IN GARAGE	2000	2		30	
16	220V REC IN GARAGE	20	2	2000	2	OTHER	2000	2		32	
17	220V REC IN GARAGE	20	2	2000	2	OTHER	2000	2		34	
18	A/C COMPRESSOR 2 TON	20	2	2000	2	A/C COMPRESSOR 2 TON	2000	2		36	
19	A/C / HEAT PUMP UNIT 1	20	2	10000	2	A/C / HEAT PUMP UNIT 2	10000	2		40	
20	A/C / HEAT PUMP UNIT 2	20	2	10000	2					42	
				TOTAL CONNECTED LOAD (VA)				GROUP BUS			
				As 17840		By 10820		GROUP WIRE (S)			

SOLID NEUTRAL  
 NEUTRAL WIRE (N)

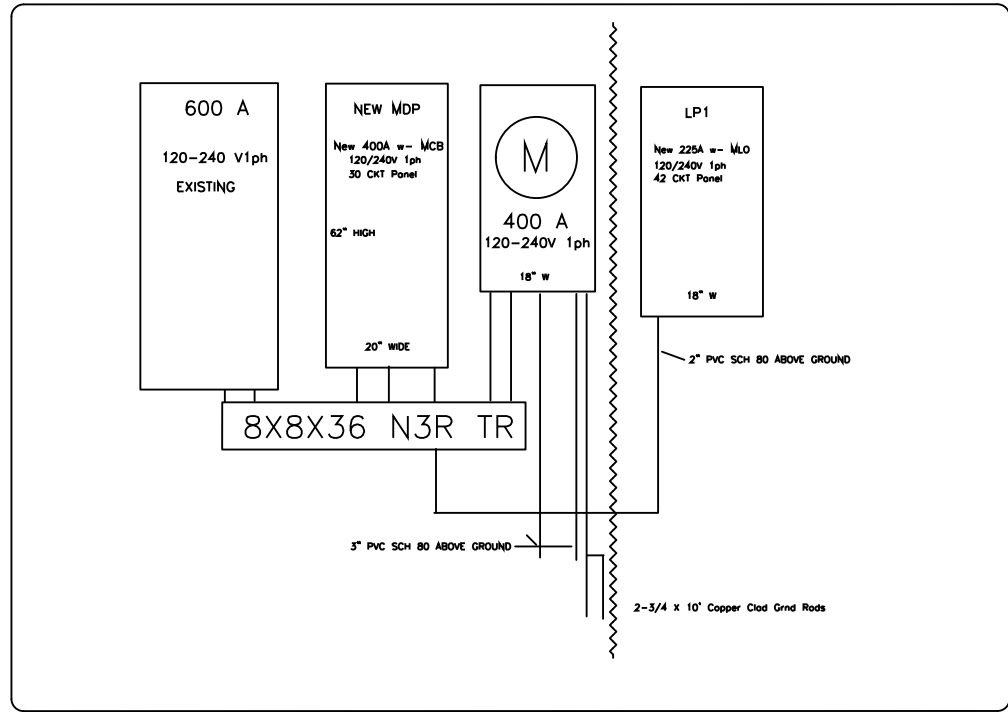

ELECTRICAL ONE LINE

SLIDELL, LA 70468

BIRPO'S

**GULF COAST ELECTRIC, LLC.**  
MEMBER OF THE BIRPO GROUP

SCALE(S) NOTED

FILE:

JOB NO.

DATE: 07/29/15

SHEET

E-2